


Recessed

Featured Product

Truly one-of-a-kind, Honeywell's Staggered T Series contacts provide you with a whole new level of convenience and flexibility. By staggering the terminals, we discovered a way to fit larger screw terminals without altering the industry-standard 3/8" diameter case size—and without having to use any special screwdrivers. The result? Easier wiring and faster installations.

The innovative design eliminates splicing and soldering, and no special screwdrivers are required. It's the industry standard-sized contact from the company with the highest standards in the industry.

➔ Recessed contacts that feature Staggered T terminals begin on page 46.

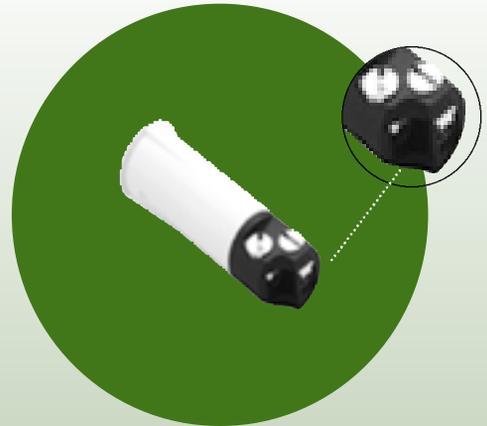

Staggered T Honeywell Exclusive

- Staggered T Terminals ensure a secure electrical connection
- Innovative design makes installation simple

Honeywell

Recessed



951WG

3/8" Diameter Miniature Press Fit Magnetic Contact

- With a 3/4" long magnet, the 951WG is ideal for casement windows, sliding windows, and other thin frame applications
- Standard gap: 1-1/4" – the largest gap of any mini 3/8" contact
- 12" leads are standard

ORDERING:

951WG-WH – White

951WG-BR – Brown


951WG-WH-M – Extra magnet (10 pack)

951WG-BR-M – Extra magnet (10 pack)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 300ma @ 30VDC

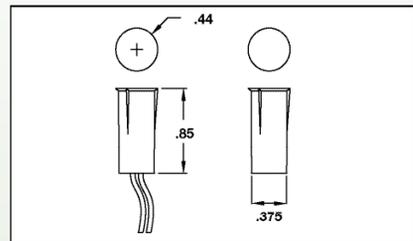

REPLACES:

- ADEMCO PR20451, 944, PR20411, PR20451, 951, PRO51SP
- Aleph DC-1651, PS-1650, DC-1621-WG
- FBII ZR755R, ZR715R
- Intellisense, MPS9
- GRI 5065, 20RS-12
- Nascom N-175N
- Sentrol 1125
- Tane STB-10, mini-10, TAP-10

Recessed

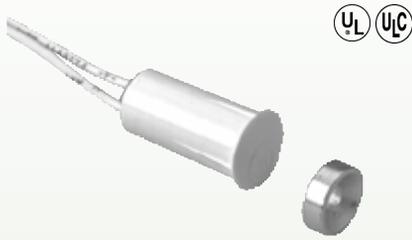

PRO51BTM 3/8" Stubby Recessed Contact with Rare Earth Button Magnet

- Stubby 3/8" press fit with button magnet fits even the tightest spots
- Powerful rare earth magnet is easy to install with screw or adhesive
- Standard gap: 1/2" (13mm)
- Magnet screw hole is convex for smooth flush fit

ORDERING:


PRO51BTM-WH – White

PROBTM – 10 pack button magnets

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed

Contact Rating: 100ma @ 28VDC

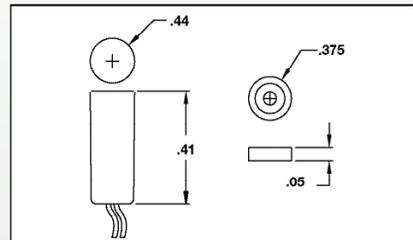

REPLACES:

- GRI N-20RS-12
- Sentrol R-1125
- Tane STB-10DM, Mini-10WG, ATB-10WG

Recessed



MPS99WG **3/8" Stubby Contact** **with Flat Magnet**

- Standard gap: 1-1/4" (32mm)
- 12" (30cm) leads
- Adhesive mounting tape on magnet

ORDERING:


MPS99GWG – White

MPS99WGB – Brown

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 300ma @ 30VDC

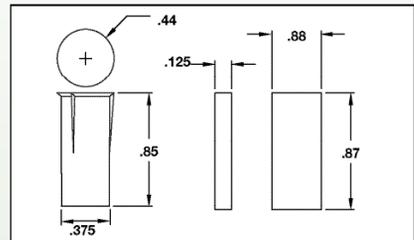

REPLACES:

- GRI 5065, 5088, 5088RS
- Sentrol R-1125

Recessed

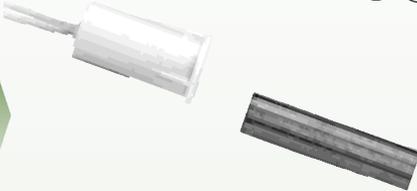

MPS95WG 3/8" Stubby Contact with 1/4" Magnet

- Standard gap: 1-1/4" (32mm)
- 12" (30cm) leads

ORDERING:


MPS95WGW – White

MPS95WGB – Brown

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed

Contact Rating: 300ma @ 30VDC

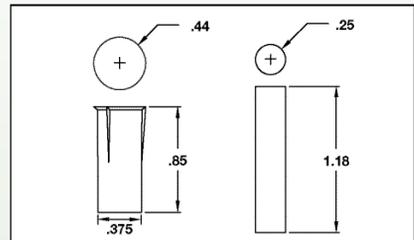

REPLACES:

- GRI 50-RFIZ

Recessed



PR-20421 Press Fit Magnetic Contact

- 1/4" diameter press fit
- Standard gap: 3/4" (19mm)
- 18" (46cm) long wire leads

ORDERING:

PR20421 – White

PR20422 – Brown


941WH – White with 5' leads

941M – Extra 1/4" bare magnet

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 100ma @ 28VDC

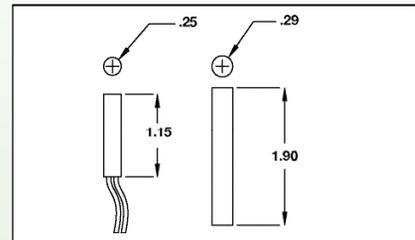

REPLACES:

- ADEMCO MPS5
- Aleph DC-1611, DC-1631
- GRI 50R-12, 50RF-12
- Sentrol 1055

Recessed

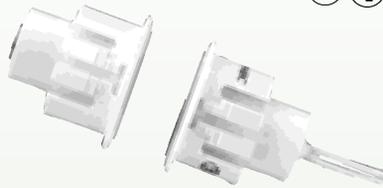

MPS70WG **3/4" Steel Door Contact**

- Standard gap: 1-1/4" (32mm)
- 5/8" (16mm) gap for steel
- 12" (30cm) leads

ORDERING:


MPS70GWG – White

MPS70WGB – Brown

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 300ma @ 30VDC

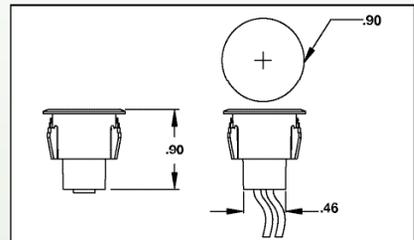

REPLACES:

- ADEMCO 947-75
- GRI 180-12WG, 180-12, 180MC-12
- Nascom N-78C
- Sentrol 1078C
- Tane SD-70

Recessed

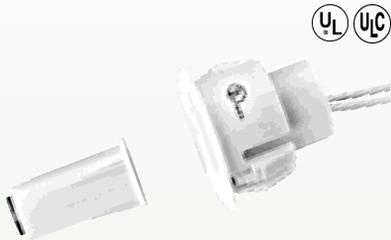

MPS73WG
3/4" Contact with 3/8" Magnet


- Standard gap: 1-1/4" (32mm)
- 12" (30cm) leads

ORDERING:

- MPS73GWG** – White
MPS73WGB – Brown

SPECIFICATIONS:


Switch Type: Form A (SPST) Reed
Contact Rating: 200ma @ 30VDC

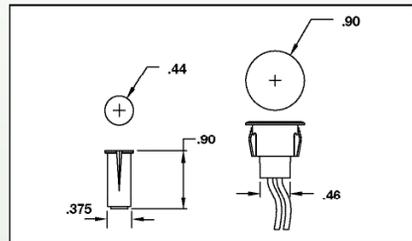

REPLACES:

- GRI 120T-12, M5

Recessed



947

1" Steel Door Magnetic Contact

- The clean look of recessed contacts coupled with robust features that meet the requirements of steel doors
- 1" (25mm) diameter with "lock-in" mounting caps
- Standard gap 1/2" (13mm) in steel
- 5' (1.5m) zip cord leads are standard
- Includes 3/8" diameter by 1" long bare magnet

ORDERING:


947-WH – White

947-BR – Brown

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 100ma @ 28VDC

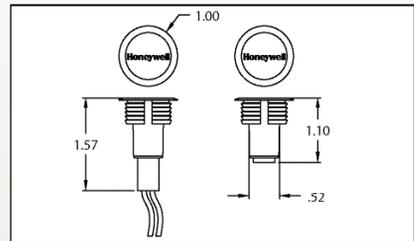

REPLACES:

- **Sentrol 1078**

Recessed

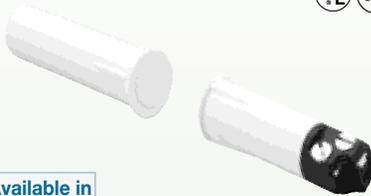

Available in
Ammo Box

944T 3/8" Magnetic Contact with Screw Terminals

- 3/8" diameter press fit design
- Screw terminals eliminates wire splicing and soldering
- Standard gap: 3/4" (19mm)
- Staggered T Terminals ensure a secure electrical connection

ORDERING:

944T-WH – White

944T-BR – Brown


944WH-M – Extra magnet (10 Pack)

944BR-M – Extra magnet (10 Pack)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed

Contact Rating: 100ma @ 28VDC

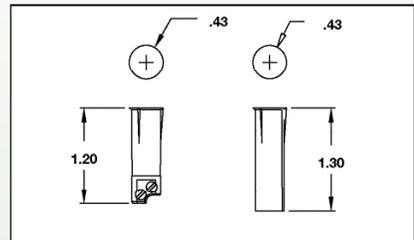

REPLACES:

- Aleph DC-3621
- GRI 2020T, 20RS-T
- Sentrol 1125T, 1075
- Tane-3/8T, 318TC

Recessed



944TRE

3/8" Magnetic Contact with Terminals and Rare Earth Magnet

- 3/8" diameter press fit design
- Rare Earth button magnet
- Standard gap: 1/2" (13mm)
- Staggered T Terminals ensure a secure electrical connection

ORDERING:

944TRE-WH – White


944TRE-BR – Brown

PROBTM– 10 Pack of button magnets

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed

Contact Rating: 100ma @ 28VDC

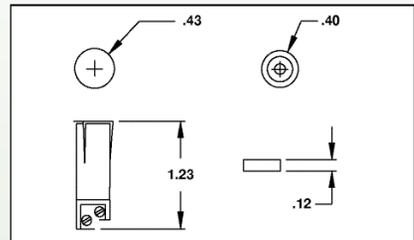

REPLACES:

- GRI N2020-TWG
- Sentrol R1125T

Recessed



Available in
Ammo Box

944TSP

3/4" Contact with Terminals and 3/8" Magnet

- 3/4" diameter switch for easier wiring; supplied with 3/8" diameter magnet
- Standard gap: 3/4" (19mm)
- Staggered T terminals ensure a secure electrical connection

ORDERING:

944TSP-WH – White

944TSP-BR – Brown

944TSP-GY – Grey


944WH-M – Extra magnet (10 Pack)

944BR-M – Extra magnet (10 Pack)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed

Contact Rating: 100ma @ 28VDC

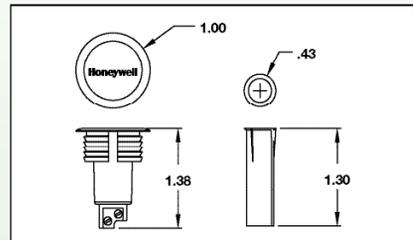

REPLACES:

- GRI 120T-12, 4473, M5

Recessed



Available in
Ammo Box

947-75T Steel Door Magnetic Contact with Terminals

- 3/4" recessed with 3/4" magnet and terminals
- 1/2" gap in steel
- Staggered T terminals ensure a secure electrical connection


ORDERING:

947-75TWH – White

947-75TBR – Brown

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed
Contact Rating: 100ma @ 28VDC

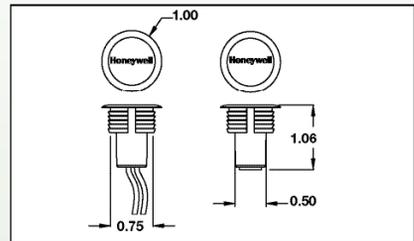

REPLACES:

- GRI 8080-T, 8080TMC, 150R5-T
- Sentrol 1078CT
- Tane 3/4 TC

Recessed



Available in
Ammo Box

956RPT Mini Roller Plunger Contact with Terminals

- Shorter body for easier recess fit
- Full 180° activation
- Staggered T terminals ensure a secure electrical connection

ORDERING:

956RPT-WH – White

956RPT-BR – Brown

956WH-B – With 18" (46cm) leads white


956BR-B – With 18" (46cm) leads brown

956-2WH – SPDT with 18" leads

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed

Contact Rating: 100ma @ 28VDC

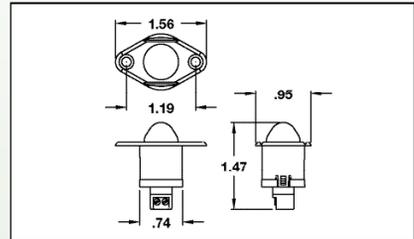

REPLACES:

- GRI DS-01T
- Sentrol 3005, 3008
- Tane RB-32

Recessed



Available in
Ammo Box

955PST Mini Plunger Contact with Terminals

- Broad face plunger distributes impact more evenly
- Staggered T terminals ensure a secure electrical connection

ORDERING:


955PST-WH – White

955PST-BR – Brown

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed

Contact Rating: 100ma @ 28VDC

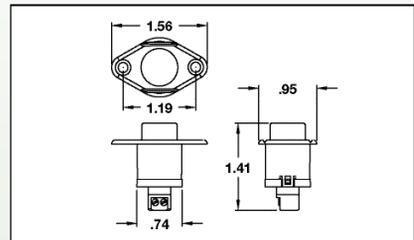

REPLACES:

- GRI PBF-100T
- Sentrol 3015
- Tane PB-52T