VANDAL RESISTANT PUSH PLATES

FOR ACCESS CONTROL APPLICATIONS



NARROW PLATE BRONZE FINISH WHITE FILL



NARROW PLATE BLUE FINISH WHITE FILL



T-STYLE PLATE CLEAR FINISH RED FILL



SINGLE GANG PLATE CLEAR FINISH BLACK FILL

- Machined from solid aluminum with engraved text and anodized finish
- Tamper resistant mounting
- Designed for use in high traffic areas
- Narrow Plate is just 1.875" wide and is suitable for mullion mounting
- T-Style and Single Gang Plates mount on a standard single gang electrical box

PLATE	SWITCH TYPE	FINISH	ENGRAVING	FILL
PN NAPROW	2 CORT MOMENTARY ACTION	1 5 4 5	<u>1</u>	1
NARROW PT	SPDT MOMENTARY ACTION	CLEAR	PUSH TO EXIT	BLACK
T-STYLE	DPDT MOMENTARY ACTION	BRONZE	PUSH TO OPERATE	RED .
PS SINGLE	5 DAIELINAATIO TIME DELAY	<u>3</u>	<u>3</u>	3
GANG	PNEUMATIC TIME DELAY (2 TO 60 SECONDS)	BRASS	PUSH TO OPEN	WHITE
GANG	(2 TO 00 SECONDS)	BLUE	ADA SYMBOL PUSH TO OPEN	BLUE
		<u>5</u> BLACK	<u>5</u> EMERGENCY DOOR RELEASE	
PS 1- 1 1 1				

Part Number Example -

For a Single Gang Plate with a SPDT Momentary Action Switch, Clear Finish, Engraved "PUSH TO EXIT" and filled in Black Ink.

Pneumatic Switch Specifications - Contact Rating 2A @ 28VDC

Contact Rating 2A @ 28VD0
Depth Behind Plate 2.25"

Switches terminated in 22AWG colored leads -

Normally Closed Pair.. Red Normally Open Pair... Blue



ASSA ABLOY

Alarm Controls 19 Brandywine Drive Deer Park, New York 11729 (800) 645-5538 www.alarmcontrols.com

ASSA ABLOY, the global leader in door opening solutions


INSTALLATION INSTRUCTIONS FOR PUSH PLATES

Mount Push Plate to mounting surface with the captive 6-32 screws using the hex key.

Switch Wiring

Common - White Lead Normally Closed Contact - Red Lead Normally Open Contact - Blue Lead

TEMPLATE FOR MULLION CUT-OUT

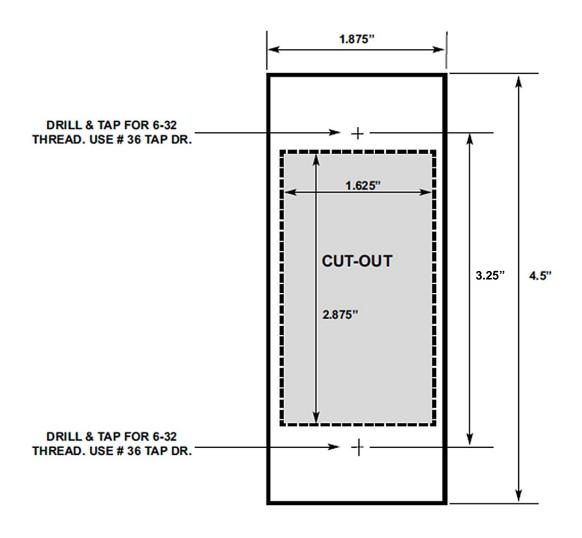



Alarm Controls
19 Brandywine Drive
Deer Park, New York 11729
(800) 645-5538
www.alarmcontrols.com