

INSTALLATION INSTRUCTIONS
PNEUMATIC TIME DELAY SWITCH
MODELS
TS-14, TS-14N
TS-21RPN
TS-60

WIRING		
Wire Color	Designation	Notes
Red	N/C Contacts	Contacts rated 2A @ 28VDC
Blue	N/O Contacts	

Mounting -


Unit should be mounted in a vertical position.

Time Adjustment -

Rotate knob clockwise for maximum time (60 seconds).

Rotate knob counter clockwise for minimum time (2 seconds).

Note: Switch time repeatability is $\pm 10\%$.

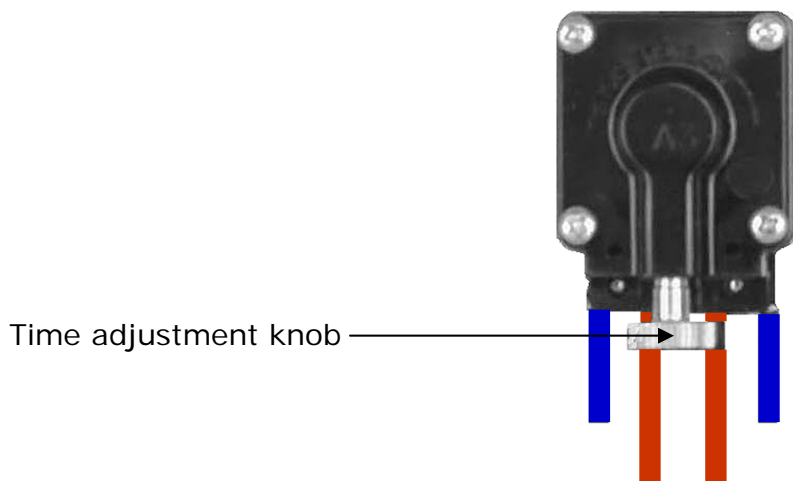

Alarm Controls
 19 Brandywine Drive
 Deer Park, New York 11729
 (800) 645-5538
 www.alarmcontrols.com