


TS-2

Request to Exit Station

The TS-2 request to exit station, with square push button, provides a convenient way to add authorized access control to a variety of applications.

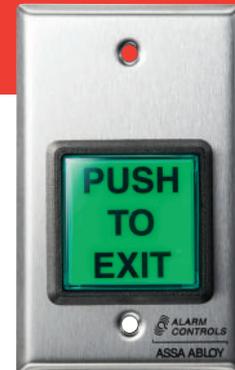

TS-2

Features

Standard Features

- Switch mounted on single gang wall plate with 430 stainless steel finish
- 2" green square push button; Illuminated with hi-brightness LED
- Button labeled "PUSH TO EXIT" for easy to follow egress instructions
- Momentary SPDT action switch

Options

- **TS-2-2** with momentary DPDT output (one set of momentary, one set of timed contacts)
- **TS-2R** with red push button
- **TS-2ENTER** button labeled "PUSH TO ENTER"
- **TS-2BLANK** button left blank
- **856LEDSM** Replacement LED (5 pack)
- Finishes: multiple plate options available
- Custom legends available as custom part

Specifications

Certifications & Listings

- UL 294 listed


Electrical

- SPDT timed contacts, rated 10A at 35 VDC or 120 VAC
- Switch depth behind plate: 2-1/2"
- Switch terminated with 10" colored leads
- LED operates on 12 or 24 VAC/VDC

TS-2T

Request to Exit Station with Electronic Timer

The TS-2T request to exit station with electronic timer and square push button, provides convenient way to keep the door unlocked for a specified amount of time, allowing for easy entry or egress. The door will relock when the relay time has expired.

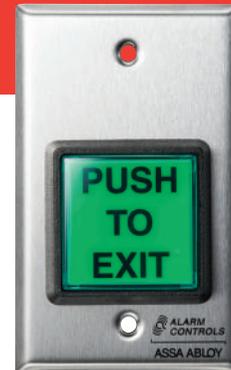

TS-2T

Features

Standard Features

- Switch mounted on single gang wall plate with 430 stainless steel finish
- 2" green square push button; illuminated with hi-brightness LED
- Button labeled: "PUSH TO EXIT" for easy to follow egress instructions
- Momentary SPDT timed output
- Timer delay is adjustable 2 to 45 seconds

Options

- **TS-2TD** with DPDT dual timed output
- **TS-2-2T** with two SPDT outputs (one set of momentary, one set of timed contacts)
- **TS-2TRED** with red push button
- **TS-2TENTER** button labeled "PUSH TO ENTER"
- **TS-2TBLANK** button left blank
- **856LEDSM** Replacement LED (5 pack)
- Custom legends available as custom part

Specifications

Certifications & Listings

- UL 294 listed

Electrical

- SPDT timed contacts, rated 2A at 35 VDC
- Switch depth behind plate: 2-1/2"
- Switch terminated with 10" colored leads
- LED operates on 12 or 24 VAC/VDC