

MODEL TS-60

PNEUMATIC TIME DELAY REQUEST TO EXIT STATION



Pneumatic time delay operator does not require power for timing function.

- 2.5" Red mushroom button engraved "PUSH TO EXIT" in white letters
- One Normally-Open contact pair and one Normally-Closed contact pair
- Contacts rated 2A @ 28VDC
- Time delay settable between 2 and 60 seconds
- Switch time is repeatable $\pm 10\%$
- Switch mounted on a single gang stainless steel electrical plate
- UL listed components



Alarm Controls
19 Brandywine Drive
Deer Park, New York 11729
(800) 645-5538
www.alarmcontrols.com

ASSA ABLOY, the global leader
in door opening solutions

INSTALLATION INSTRUCTIONS
PNEUMATIC TIME DELAY SWITCH
MODELS
TS-14
TS-21RPN
TS-60

WIRING		
Wire Color	Designation	Notes
Red	N/C Contacts	Contacts rated 2A @ 28VDC
Blue	N/O Contacts	

Mounting -


Unit should be mounted in a vertical position.

Time Adjustment -

Rotate knob clockwise for maximum time (60 seconds).

Rotate knob counter clockwise for minimum time (2 seconds).

Note: Switch time repeatability is $\pm 10\%$.

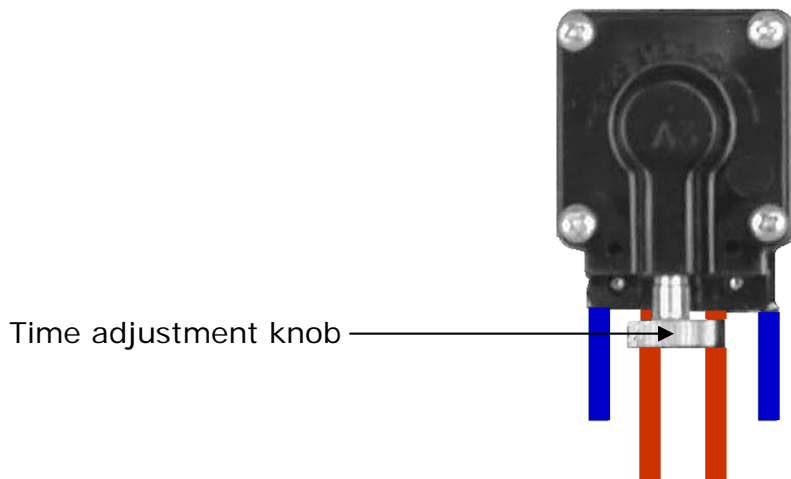

Alarm Controls
 19 Brandywine Drive
 Deer Park, New York 11729
 (800) 645-5538
 www.alarmcontrols.com