



MarketCom (MC) Series Communication and Paging System



Commercial | Industrial | Retail

Features and Benefits

60 station capacity

Quickly communicate with employees throughout the entire facility.

Paging and announcements

Request personnel to answer a specific channel or broadcast a general message.

Four communication channels

Reach employees instantly without having to wait for occupied lines to open up.

Color LED indicators

Know exactly which channel to answer by the corresponding LED indicator.

Handset page button

Prevent accidental paging with the strategic location of the page button.

Simple to use

Push one button to page and one button to answer—easier than a telephone.

Complements phone system

Improve communication with quick access paging, a feature telephones do not offer.

Great for noisy environments

Use the system's speakers and amplifiers to produce loud and clear announcements in any environment.

Reliable and designed to last

Install the system and have guaranteed trouble-free use for years to come.



Applications



Grocery Stores




Retail Outlets




Industrial Facilities



Manufacturing Plants

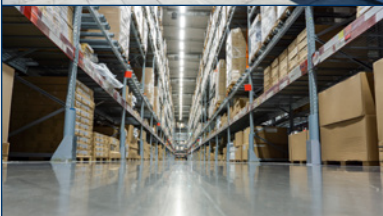

Warehouses

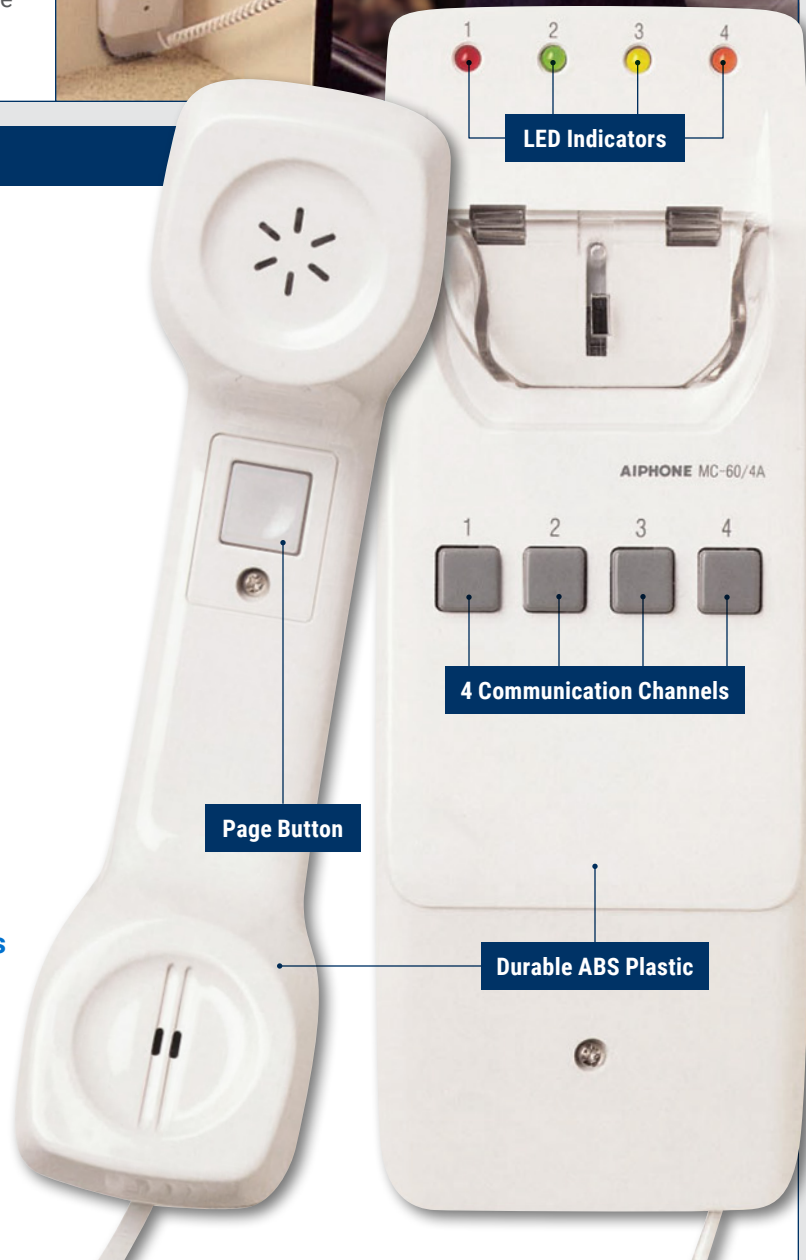

Components

Master Station: select up to 60



MC-60/4A

Audio MarketCom Master Station

- Four communication channels with LED indicators
 - Easy access page button
 - Handset for privacy
- 9-1/4" H
3-1/2" W
3-1/2" D

Power Supply (required for system)



PS-2420UL

24V DC, 2A Power Supply
6-9/16" H
3-9/16" W
2-1/16" D

Paging Adaptor (one required for system paging)



MC-A/A

Paging Adaptor
2" H 3-9/16" W 5-5/8" D

Paging Amplifiers (one required for system paging)



MD35M

35W Paging Amplifier
1-3/4" H 8-1/2" W 12-1/2" D



MD60M

60W Paging Amplifier
1-3/4" H 8-1/2" W 12-1/2" D



MD120M

120W Paging Amplifier
1-3/4" H 8-1/2" W 12-1/2" D

Paging Speakers: install number of speakers needed (based on amplifier wattage)



MH-15W


- Multi-Tap Horn Speaker
- 8Ω direct tap
 - Built-in transformer for 25/70/100V systems
 - Lightweight aluminum
 - Weatherproof and waterproof
 - Indoor and outdoor use
 - Universal mounting bracket
- 9" H 9" W 9-1/2" D



SP-2570N

- Ceiling Speaker
- 8Ω, 25/70V, 5W
 - Indoor use
 - Flush mount
- Diameter: 12-7/8"
Baffle Diameter: 8"

Accessories

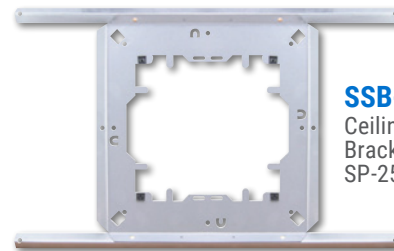

SSB-2

Ceiling Support Bracket for SP-2570N

Specifications

Power Source	24V DC – use PS-2420UL
Communication	Handset (full-duplex)
Door Release	N/A
Wire Type	7-conductor, non-twisted, low capacitance, PE insulation – use Aiphone #852207
Distance	Paging Adaptor to farthest Master Station on block: 1,700' (22 AWG) 4,000' (18 AWG) Total cumulative wiring between Paging Adaptor and Master Stations: 5,000' (22 AWG)



Aiphone Corporation
HEADQUARTERS

6670 185th Ave NE
Redmond, WA 98052

Aiphone Corp. East
REMOTE OFFICE

535 Route 38 East, #340
Cherry Hill, NJ 08002

Aiphone Corp. Canada
REMOTE OFFICE

400 St. Martin West Blvd., #200
Laval, QC H7M 3Y8

SECURITY COMMUNICATION SOLUTIONS

aiphone.com

Customer Service & Technical Support (800) 692-0200

MarketCom (MC) Series Brochure | 11/2021

© 2021. All Rights Reserved.

The information in this brochure is subject to change without notice.