


ACM4CB

Multi-Output Access Power Controller

Description

Altronix ACM4CB converts one (1) 12 to 24 volt AC or DC input into four (4) independently controlled Class 2 rated PTC protected power-limited auto-resettable outputs rated at 2A each. Outputs are activated by an open collector sink or normally open (NO) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. The ACM4CB will route power to a variety of access control hardware devices including Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes.

Units are designed to be powered by one common power source which will provide power for both the board operation and locking devices, or two (2) totally independent power sources, one (1) providing power for board operation and the other for lock / accessory power. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the four (4) outputs.

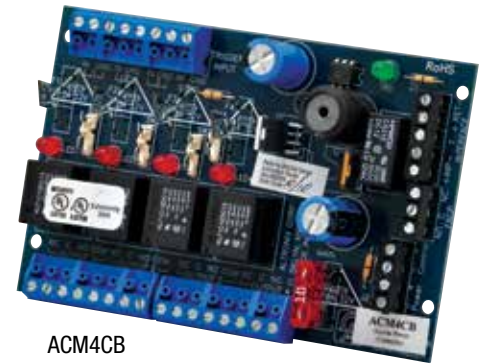

ACM4CB

Specifications

Input

Voltage:

12 to 24 VAC or VDC operation (setting not required),
0.4A @ 12V, 0.2A @ 24V current consumption
with all relays energized.

Main fuse is rated at 10A.

Trigger Inputs:

Four (4) Access Control System trigger inputs:

- Four (4) normally open (NO) inputs.
- Four (4) open collector sink inputs.
- Any combination of the above.

Input Options:

- One (1) common power input (board and lock power).
- Two (2) isolated power inputs (one (1) for board power and one (1) for lock/accessory power).

Outputs

Four (4) independently controlled Class 2 Rated

PTC protected power-limited auto-resettable 2A outputs:

- Four (4) Fail-Safe and/or Fail-Secure power outputs.

Four (4) auxiliary power outputs (unswitched).

Output ratings:

- Output PTCs are rated 2A each.

Note:

Total output current is determined by the power supply, not to exceed a maximum of 10A total.

Indicators (LED)

Red LEDs

Outputs are triggered (relays energized).

Green LED

FACP disconnect is triggered.

Agency Listings

UL:

Access Control

UL294

cUL:

General Signaling Equipment Evaluated to
CSA Standard C22.2 No.205-M1983.

Physical and Environmental

Dimensions (W x L x H)

5.175" x 3.36" x 1.25" (131.4mm x 85.3mm x 31.8mm).

Product Weight 0.35 lbs. (0.16 kg).

Shipping Weight 0.45 lbs. (0.2 kg).

Temperature

Operating

0°C to 49°C (32°F to 120°F).

Storage

-20°C to 70° C (-4°F to 158°F).

Relative Humidity

85% +/-5%.

BTU/Hr (approx.):

12VAC or VDC: 2 BTU/Hr.

24VAC or VDC: 3 BTU/Hr.

ACM4CB

Multi-Output Access Power Controller

Board Dimensions (L x W x H) and Drawing

5.175" x 3.36" x 1.25" (131.4mm x 85.3mm x 31.8mm)

