


OLS350

Off-Line Switching Power Supply/Charger

Description

Altronix OLS350 power supply/charger converts a 115VAC, 50/60Hz input into a 24VDC output. This unit has a wide range of applications for access control and security system accessories that require additional power.

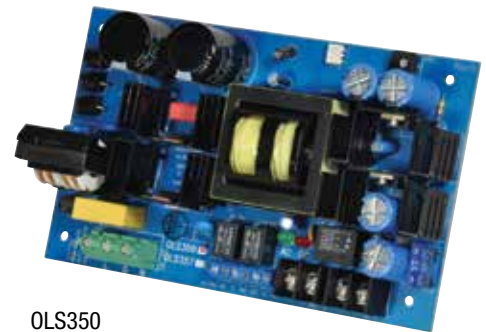

OLS350

Specifications

Input

Voltage 115VAC, 50/60Hz, 5.0A.

Outputs

Voltage 24VDC.
 Current 12A continuous supply current.
 Other Short circuit and thermal overload protection.
 Filtered and regulated.

Back-up Battery *(not included)*

Type Sealed lead acid or gel type.
 Failover Upon AC loss, instantaneous.

Supervision

AC Failure Form "C" contacts.
 Battery Low/Fail Form "C" contacts.

Indicators (LED)

Input Input voltage is present.
 DC Output Powered.

Agency Listings

CE European Conformity.

Physical and Environmental

Dimensions (L x W x H)
 7.25" x 4.5" x 1.75" (184.1mm x 114.3mm x 44.5mm).
 Product Weight 1.1 lbs. (0.5 kg).
 Shipping Weight 1.4 lbs. (0.64 kg).
 Temperature
 Operating 0°C to 49°C (32°F to 120°F).
 Storage -20°C to 70°C (-4°F to 158°F).
 Relative Humidity 85% +/-5%.
 BTU/Hr (approx.): 147 BTU/Hr.
 Mounting hardware included.

OLS350

Off-Line Switching Power Supply/Charger

Board Dimensions (L x W x H) and Drawing

7.25" x 4.5" x 1.75" (184.1mm x 114.3mm x 44.5mm)

