

**Pace1KRT****Long Range Single Pair (UTP) Ethernet Adapter Kit**

Kit includes Pace1KR Receiver and Pace1KT Transceiver

**Overview:**

Pace1KRT is a long range Ethernet adapter kit that transmits data and power via UTP (2-wire, twisted pair) in a PoE(+) compliant format. Pace1KR receiver is powered via a PoE midspan/endspan, such as the Altronix Netway series. The receiver passes the PoE compliant power over UTP to the Pace1KT transceiver which, in turn, passes this power to an enabled IP camera/device. These plug and play, cost-effective solutions facilitate IP devices that need to be installed at distances greater such as in elevator shafts, tunnels, bridges, HVAC, etc.. supporting deployments over 1000m.

**Features:****Input (Pace1KR Receiver):**

- Powered by midspan or endspan.  
PoE compliant to IEEE 802.3af (15W) and PoE+ compliant to IEEE 802.3at (30W).

**UTP Connection:**

- Wire type: 2-wire (UTP).
- Speed: 10Mbps
- Distance: + 1000m, 18/2 AWG @ 10Mbps  
(see *Maximum Length of Cable Type vs. Total Power Consumption*, pg.3)

**Ethernet Connection:**

- Connectivity: RJ45, auto-crossover.
- Wire type: 4-pair CAT5e or higher.
- Distance: up to 100m from midspan to Pace1KR receiver (headend), 100m from PaceKT transceiver to device
- Speed: 10/100BaseT, half/full duplex, auto negotiation. PoE compliant to IEEE 802.3af (15W) and PoE+ compliant to IEEE 802.3at (30W) delivered to device by Pace1KR Power provided by Pace1KR to Pace1KT by PoE protocol.\*

**LED Indicators:**

- **Pace1KR and Pace1KT:**  
Link LED: Green, PoE Active (left of UTP link)  
Link LED: Green, Active Indicate Data transmission (Next to Ethernet link)
- **Pace1KR and Pace1KT: (RJ45 jack):**  
Yellow and Green LED IP Link status, 10/100Base-T/active.

**Environmental:**

- **Operating Temperature:**  
**Pace1KR / Pace1KT:**  
– 40°C to 75°C (– 40°F to 167°F).
- **Storage Temperature:**  
– 40°C to 75°C (– 40°F to 167°F).
- Relative humidity:  
20 to 85%, non-condensing.

**Functions:**

- Auto detection and protection of legacy non-PoE cameras/devices.

**Applications:**

- Utilize twisted pair for new installations or retrofit of IP devices.
- Extend Network link distance in an industrial environment over 1000m.
- Works with Megapixel, HD720, HD1080 and VGA (SD) cameras with proper headend equipment.

**Mechanical:**

- Dimensions (W x L x H approx.):  
**Pace1KR and Pace1KT:**  
3.8" x 2.5" x 1"  
(96.52mm x 63.5mm x 25.4mm).

\*See note on Page 3.

## Installation Instructions:

Wiring methods shall be in accordance with the National Electrical Code/NFPA 70/ANSI, and with all local codes and authorities having jurisdiction. Wiring should be UL Listed and/or Recognized wire suitable for the application.

Pace1KR and Pace1KT are not intended to be connected to outside plant leads and should be installed indoors within the protected premises. Pace1KR and Pace1KT are intended for indoor use only.

### 1. Pace1KR installation:

- a. Secure unit to the desired mounting surface with a proper fastening device utilizing the unit's mounting hole (Fig. 2a, pg. 3). Unit should be mounted in proximity to ethernet switch/network, NVR or video server.
- b. Connect structured cable from ethernet midspan or endspan device to RJ45 jack marked [PoE Input] (Fig. 2, pg. 3).
- c. **UTP / 2-wire:** Connect UTP to connector marked [+ , -] (Fig. 2, pg. 3).


### 2. Pace1KT installation:

- a. Secure unit to the desired mounting surface with a proper fastening device utilizing the case's mounting hole. Unit should be mounted in the proximity of camera/device.
- b. Connect structured cable from IP camera/device to RJ45 jack marked [PoE Out] (Fig. 2, pg. 3).
- c. Connect UTP to the connector marked [+ , -] from receiver (Pace1KR) (Fig. 2, pg. 3).

## Technical Specifications:

| Parameter                       | Description   |
|---------------------------------|---|
| <b>Connections</b>              | RJ45 for CAT5/6 or higher ethernet link.<br>UTP (2-wire) screw terminals to interconnect receiver/transceiver   |
| <b>Input power requirements</b> | Midspan or endspan port connected.<br>PoE compliant to IEEE 802.3af (15W) and<br>PoE+ compliant to IEEE 802.3at (30W)   |
| <b>Indicators</b>               | <b>Yellow (RJ45 connector):</b> On - Link, Off - No Link, Blinking - Activity.<br><b>Green (RJ45 connector):</b> On - 100Base-TX, Off - 10Base-T.<br><b>Green Link LEDs:</b> Link active  |
| <b>Environmental Conditions</b> | <b>Operating Ambient Temperature: UL60950-1</b><br><b>Pace1KR:</b> - 20°C to 49°C (- 4°F to 120.2°F).<br><b>Pace1KT:</b> For 15W: - 40°C to 75°C (- 40°F to 167°F).<br>For 30W: - 40°C to 49°C (- 40°F to 120°F).<br><b>Storage Temperature:</b> - 40°C to 75°C (- 40°F to 167°F).<br><b>Relative Humidity:</b> 20 to 85%, non-condensing.<br><b>Operating Altitude:</b> - 304.8 to 2,000m. |
| <b>Regulatory Compliance</b>    | CE approved.  |
| <b>Weights (approx.)</b>        | Product: 0.4 lbs. (0.18 kg)   Shipping: 1 lbs. (0.45 kg).   |


Fig. 1

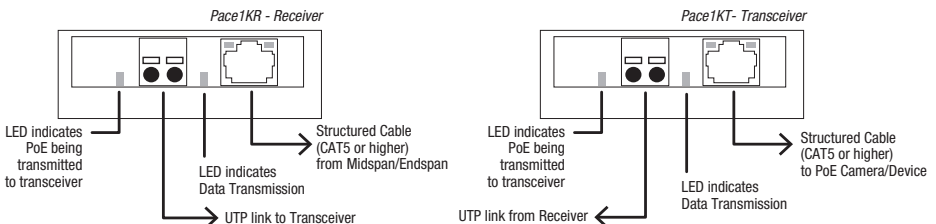

## Single PoE Camera Connection:

Fig. 2

Fig. 2a

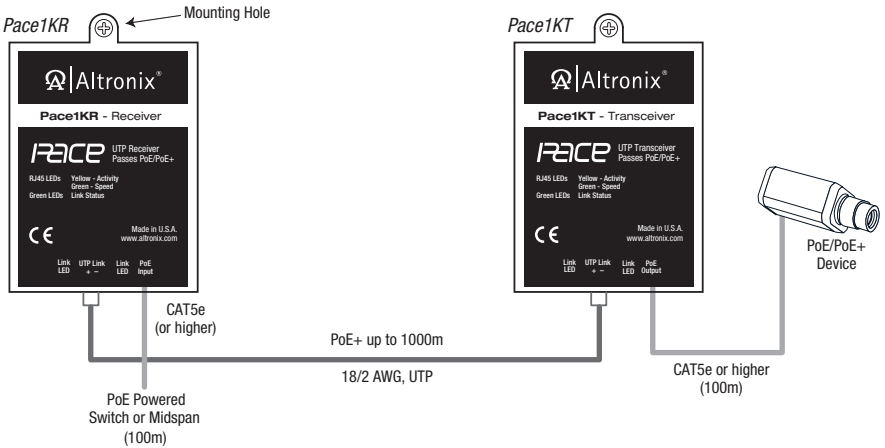

### Maximum Length of Cable Type vs. Total Power Consumption:

| Wire type               | Total Power Consumption | Max. Data Distance | Max. Power Distance |
|-------------------------|-------------------------|--------------------|---------------------|
| 18 AWG<br>(2-wire, UTP) | 7.5W                    | 1000m (3280 ft)    | 1996m (6548ft.)     |
|                         | 15W                     | 1000m (3280 ft)    | 998m (3274 Ft.)     |
|                         | 30W                     | 1000m (3280 ft)    | 269m (882 ft)       |
| 16 AWG<br>(2-wire, UTP) | 7.5W                    | 1000m (3280 ft)    | 3169m (10396 ft.)   |
|                         | 15W                     | 1000m (3280 ft)    | 1584m (5196 ft.)    |
|                         | 30W                     | 1000m (3280 ft)    | 427m (1400 ft.)     |

**Note:** Calculations based on 56VDC starting voltage from power source and accounts for a 10VDC voltage drop. IEEE standards voltage range requirement for powered devices are: PoE (15W) - 37VDC to 57VDC, PoE+ (30W) - 44VDC to 57VDC

## **Notes:**

Altronix is not responsible for any typographical errors.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056  
website: [www.altronix.com](http://www.altronix.com) | e-mail: [info@altronix.com](mailto:info@altronix.com) | Lifetime Warranty | Made in U.S.A.  
II Pace1KRT B19U

