

Installation Guide

Specifications:

Input Voltage:

- 12VDC operation.
- Current draw: 15mA.
- Polarity sensitive input.


Contact Rating:

- 2A/120VAC or 2A/28VDC
- Double form "C" DPDT contacts.


Mechanical:

- Snap track mountable (order part # ST1).
- Board dimensions (L x W x H approx.):
2.75" x 1.625" x 0.875"
(69.9mm x 41.3mm x 22.2mm)


Dry Contacts



Polarity Reversal

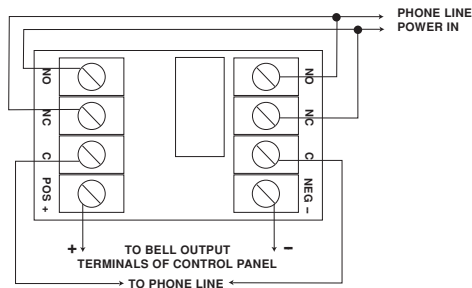

Latching Dry Contacts

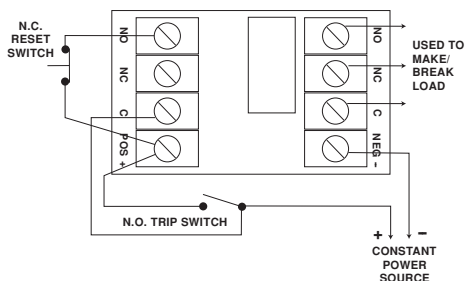

Line Seizure

