



RBSNTTL

Ultra Sensitive Relay Module


Specifications:

- 12VDC to 24VDC operation.
- 3VDC to 24VDC 2mA - 16mA isolated trigger.
- DPDT contacts rated at 2A/120VAC/28VDC
- Snap track mountable (order part # ST1).

Board Dimensions (W x L x H):

1.9" x 2.75" x 1.1"

(48.26mm x 69.85mm x 27.94mm)

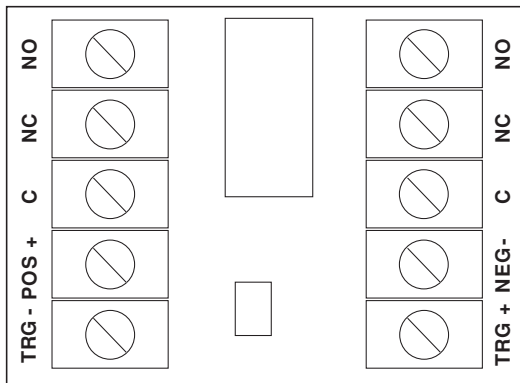

Installation Instructions:

1. Connect 12VDC or 24VDC power supply (regulated) to the terminals marked [POS +] and [NEG -]. Carefully observe polarity.
2. Connect trigger voltage to the terminals marked [TRG +] and [TRG -].
3. Use output contacts to make and break load circuits.

Note: When using a common power source, the unused trigger terminal must be jumpered to its respective POS (+) or NEG (-) power supply terminal.

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056

website: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty

IIRBSNTTL - Rev. 020106

F21U

