

Specifications:


- 6VDC or 12VDC or 24VDC selectable operation.
- Current draw 30mA.
- 1 amp/120VAC or 2 amp/28VDC DPDT contacts.

Board dimensions (W x L x H):


2" x 2.75" x 1" (50.8mm x 69.8mm x 25.4mm)

Relay is factory set for 6VDC.


Cut Jumper 2 for 12VDC or cut Jumper 1 for 24VDC.




Dry Contacts




Polarity Reversal

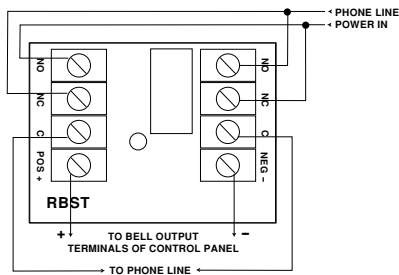

Latching Dry Contacts

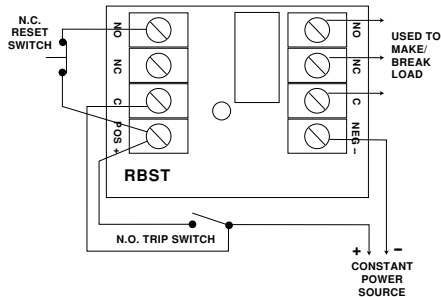

Line Seizure

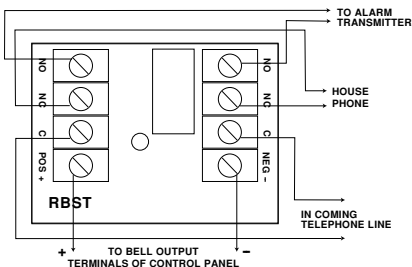

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA, 718-567-8181, fax: 718-567-9056
 website: www.altronix.com, e-mail: info@altronix.com, Lifetime Warranty, Made in U.S.A.

IIRBST - Rev. 101007

H25N