

Altronix TM400 enclosure lets you easily integrate Altronix power with Mercury/LeneIS2 access controllers and accessories. TM400 simplifies board layout and wire management, reduces installation time and labor costs.



TM400

Key Features

- Accommodates the following Mercury controllers with or without Altronix power/accessories:
 - Mercury: LP1502, LP4502, MR52, MR16IN, MR16OUT, MR62e, LP1501, MR50
 - LeneIS2: LNL-2220, LNL-4420, LNL-1320, LNL-1100, LNL-1200, LNL-2210, LP1300e, LNL-1300
 - Altronix Power Supply and Sub-Assembly
- 16 Gauge steel enclosure.
- Convenient knockout configuration:
 - Twelve (12) double knockouts
1.125" (3/4" Conduit) / 1.375" (1" Conduit).
 - Cam lock and keys are included.

Capacity

- Fits two (2) 12VDC/7AH batteries.

Physical and Environmental

Dimensions (H x W x D)


15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm).

Product Weight 7.8 lbs. (3.54kg).

Shipping Weight 9.1 lbs. (4.13 kg).

Access Controller Position Chart for the Following Models:

Altronix / Mercury/LeneIS2	Pem Mounting
AL400ULXB2, AL400ULXB2V, AL600ULXB, AL600XB220, AL1012ULXB, AL1012XB220, eFlow4NB, eFlow4NBV, eFlow6NB, eFlow6NBV, eFlow102NB, eFlow102NBV	(A)
ACM4, ACM4CB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB, VR6	(B)
MR50, LNL-1300	(C)
LP1501, MR62e, LNL-1300e, LNL-2210	(D)
LP1502, LP4502, MR52, MR16IN, MR16OUT, LNL-2220, LNL-4420, LNL-1320, LNL-1100, LNL-1200	(E)

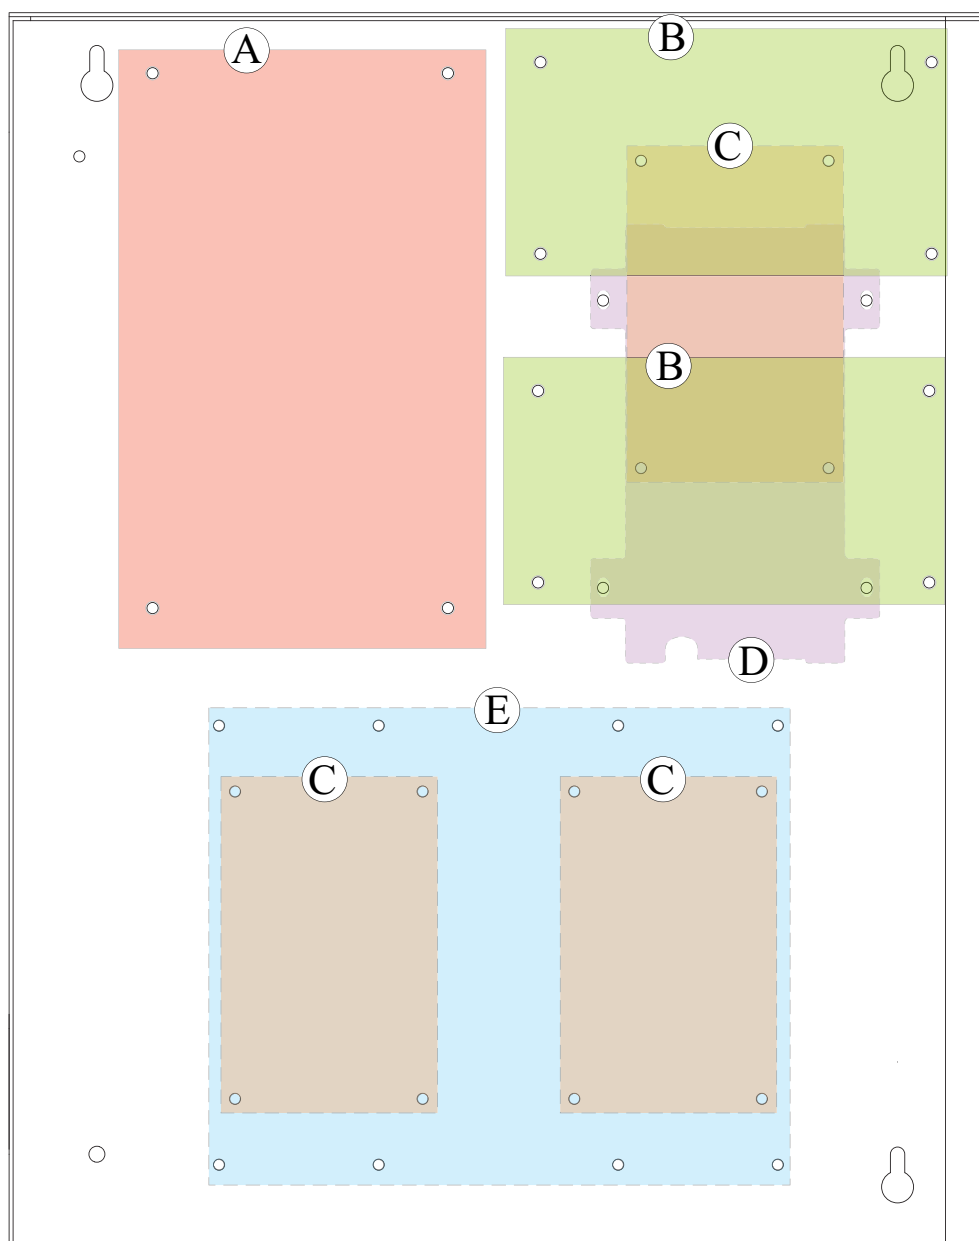

Dimensions and Drawing

Dimensions (H x W x D approximate)

15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

