




PSR-24 Series 24VDC Power Supplies (AlphaStatus™)



PSR-24/12 (12.5Amp)

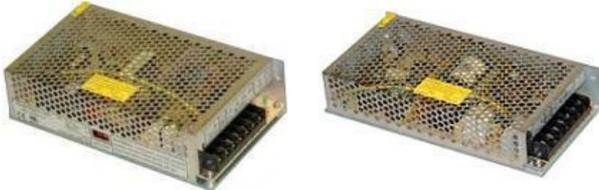

PSR-24/6 (6.5Amp)

PSR-24/4 (4.5Amp)



PSR-24/2.5 (2.5Amp)

PSR-24 Series AlphaStatus™ 24VDC Power Supply Units

The **PSR-24** series 24VDC regulated power supplies are specifically designed to provide power for the **AlphaStatus™** series room status system(s) or other similar applications. Typically, one (1) power supply is required for each system, but depending on the number of room devices, more may be required.

Features

- 24VDC, 50 / 60 Hz Regulated Output
- Heavy duty construction
- Four (4) models available
- U.L. Recognized (for U.S. use) / CE Listed

Specifications

Housing:	Heavy duty steel case finish, with mounting plate.
Input:	115VAC / 230VAC switch selectable, (115VAC default) 50 / 60 Hz.
Output(s):	<p>Voltage: 24VDC, 50 / 60 Hz.</p> <p>Amps:</p> <ul style="list-style-type: none"> • 12.5 Amps (Model PSR-24/12) • 6.5 Amps (Model PSR-24/6) • 4.5 Amps (Model PSR-24/4) • 2.5 Amps (Model PSR-24/2.5)
Cooling:	Models PSR-24/2.5 , PSR-24/4 and PSR-24/6 have a perforated metal housing to allow for proper cooling. Model PSR-24/12 has a built-in cooling fan.
Connectors:	Screw terminal connectors.
AC Connection:	AC cord with grounded plug, to be supplied by the installer (to code).

42 Central Drive • Farmingdale • NY • 11735-1202 • Phone: (631) 777-5500 • Fax: (631) 777-5599
 TOLL-FREE: (800) 666-4800 • Web: AlphaCommunications.com • Email: info@alphacomcommunications.com

Copyright© 1998-2014 Alpha Communications® - All Rights Reserved.

Due to continuous product improvement, all colors, sizes, materials, finishes and specifications are subject to change without notice. [Next \(APS625\) >](#)

[< Previous \(APS623\)](#)