


## FSC2012

Corner adapter for FSM2012



## FSA2012

Pole adapter for FSM2012  
and for FSM3009

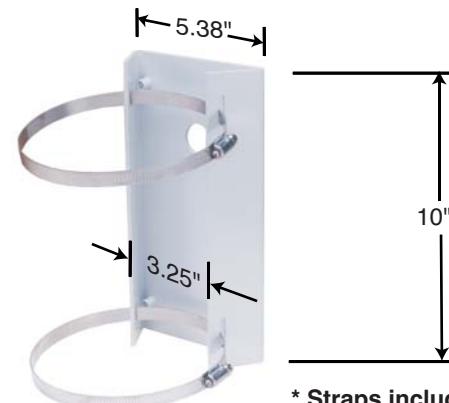

## FSM2012

Wall mount for FB-2012



### A robust corner bracket for our FSM2012

This lightweight bracket requires 12 screws to be secured to most flat wall surface. The **FSM2012** attaches to the front part using 4 screws (included).

#### Fabrication:

Body: All aluminum, 8 Ga., #3003-H14 alloy  
Finish: White polyurethane coating  
Weight: 6.3 lb ( 2.8 kg)

#### External dimensions:

Height: 10.5" (267 mm)  
Width: 20.75" (527 mm)  
Length: 10.5" (267 mm)

### An adaptor for most popular 3" to 8 1/2" poles

This lightweight one piece aluminum construction provides a strong and stable mounting surface for our **FSM2012** and our **FSM3009** wall bracket. It can be used on poles having 3" to 8 1/2" in diameter. Two Stainless Steel straps are included.

#### Fabrication:

Body: All aluminum, 11 Ga. , #3003-H14 alloy  
Finish: White polyurethane coating  
Weight: 1.3 lb ( 0.6 kg)

#### External dimensions:

Height: 10.0" (254 mm)  
Width: 5.375" (136 mm)

### An industrial strength adjustable mount

Lightweight and rustproof this all aluminum bracket is solid and fully adjustable in all directions. The bracket can tilt 55° and can swivel 360°. The installation is fast and easy requiring only 4 screws.

#### Fabrication:

Body: All aluminum, gauge 5, #3003-H14 alloy  
Finish: White polyurethane coating  
Weight: 3.5 lb (1.5 kg)

#### External dimensions:

Height: 11.75" (298 mm)  
Width: 5.25" (133 mm)  
Length: 12.5" (317 mm)