

Analog Public View Monitors with Built-in DVR



WELDEX
CORPORATION

WDL-EPVM5

5" Analog Public View Monitor with Built-In DVR




SPECIFICATION

Display		
Screen size	5.0"	
Resolution	800(W) × 480(H)	
Brightness	600cd/m ²	
Viewing angle	140(H) × 120(V)	
Contrast ratio	500:1	
Aspect ratio	16:9	
Response time	< 20ms	
Camera		
Image sensor	1/2.7" omnivision 1.3M progressive C-MOS	
Lens	Fixed 3.7mm F2.0	
Active pixel	1280(H) × 720(V)	
Frame rate	30fps	
Shutter	Rolling shutter	
Wide dynamic range	115dB	
Sensitivity	3650mV/Lux-sec	
Interface		
Storage	DVR	Internal micro SD card slot
	Storage media	External micro SD card slot
Alarm I/O	Terminal block 4P	
Speaker	1W mono speaker	
User I/F	User input I/F	Remote controller (coming soon)
	Indicators	Power, record LEDs
Mount	VESA™ 75 × 75mm	
Power		
Power adapter	DC 12V / 4A	
Power consumption	< 0.5A	
Environmental		
Operating temperature	0°C ~ +50°C (+32°F ~ +122°F)	
Humidity	10~90% RH, non condensing	
Dimensions		
Dimensions	140.0(W) × 121.0(H) × 24.0(D)(mm)	
Weight	600g (net weight)	

FEATURES

- High quality and cost-effective
- Low power consumption for cost savings
- Built-in WDR HD camera with motion sensing
- Built-in removable SD card for displaying advertising or corporate message
- On-board DVR included with SD card slot
- Switch between camera video and display advertisement on motion activity
- User definable text warning message
- Built-in alarm I/O
- Compatible management S/W (verint nextiva 6.x, march video sphere R5)

DIMENSIONS

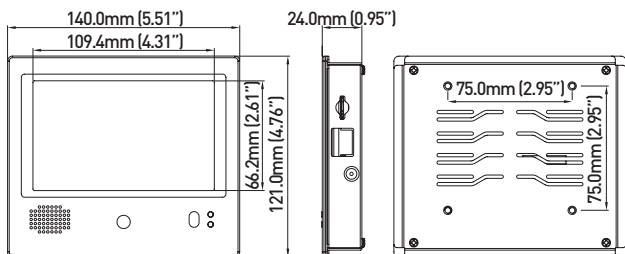

STANDARD LCD MONITORS

ANALOG PUBLIC VIEW MONITORS with BUILT-IN DVR

ANALOG PUBLIC VIEW MONITORS

IP PUBLIC VIEW MONITORS

SUNLIGHT VIEWABLE LCD MONITORS

TOUCH SCREEN LCD MONITORS

FLUSH MOUNT LCD MONITORS

BACK MOUNTABLE LCD MONITORS

WDL-EPVM7


7" Analog Public View Monitor with Built-In DVR



SPECIFICATION

Display		
Screen size	7.0"	
Resolution	800(W) × 480(H)	
Brightness	400cd/m ²	
Viewing angle	140(H) × 120(V)	
Contrast ratio	500:1	
Aspect ratio	16:9	
Response time	< 20ms	
Camera		
Image sensor	1/2.7" omnivision 1.3M progressive C-MOS	
Lens	Fixed 3.7mm F2.0	
Active pixel	1280(H) × 720(V)	
Frame rate	30fps	
Shutter	Rolling shutter	
Wide dynamic range	115dB	
Sensitivity	3650mV/Lux-sec	
Interface		
Storage	DVR	Internal micro SD card slot
	Storage media	External micro SD card slot
Alarm I/O	Terminal block 4P	
Speaker	1W mono speaker	
User I/F	User input I/F	Remote controller (coming soon)
	Indicators	Power, record LEDs
Mount	VESA™ 75 × 75mm	
Power		
Power adapter	DC 12V / 4A	
Power consumption	< 0.7A	
Environmental		
Operating temperature	0°C ~ +50°C (+32°F ~ +122°F)	
Humidity	10~90% RH, non condensing	
Dimensions		
Dimensions	184.0(W) × 148.0(H) × 27.0(D)(mm)	
Weight	720g (net weight)	

DIMENSIONS

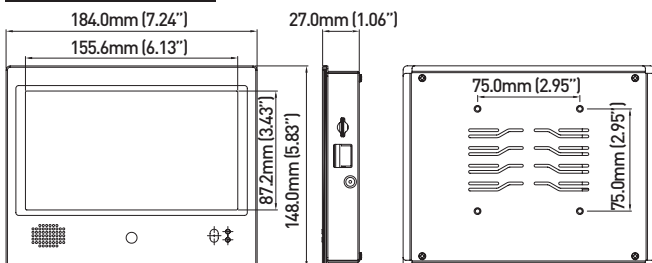

FEATURES

- High quality and cost-effective
- Low power consumption for cost savings
- Built-in WDR HD camera with motion sensing
- Built-in removable SD card for displaying advertising or corporate message
- On-board DVR included with SD card slot
- Switch between camera video and display advertisement on motion activity
- User definable text warning message
- Built-in alarm I/O
- Compatible management S/W
(verint nextiva 6.x, march video sphere R5)

WDL-EPVM8


8" Analog Public View Monitor with Built-In DVR



SPECIFICATION

Display		
Screen size	8.0"	
Resolution	800(W) × 480(H)	
Brightness	450cd/m ²	
Viewing angle	140(H) × 120(V)	
Contrast ratio	500:1	
Aspect ratio	16:9	
Response time	< 20ms	
Camera		
Image sensor	1/2.7" omnivision 1.3M progressive C-MOS	
Lens	Fixed 3.7mm F2.0	
Active pixel	1280(H) × 720(V)	
Frame rate	30fps	
Shutter	Rolling shutter	
Wide dynamic range	115dB	
Sensitivity	3650mV/Lux-sec	
Interface		
Storage	DVR	Internal micro SD card slot
	Storage media	External SD card slot
Alarm I/O	Terminal block 4P	
Speaker	1W mono speaker	
User I/F	User input I/F	Remote controller (coming soon)
	Indicators	Power, record LEDs
Mount	VESA™ 75 × 75mm	
Power		
Power adapter	DC 12V / 4A	
Power consumption	< 0.7A	
Environmental		
Operating temperature	0°C ~ +50°C (+32°F ~ +122°F)	
Humidity	10~90% RH, non condensing	
Dimensions		
Dimensions	220.0(W) × 172.0(H) × 27.0(D)(mm)	
Weight	800g (net weight)	

DIMENSIONS

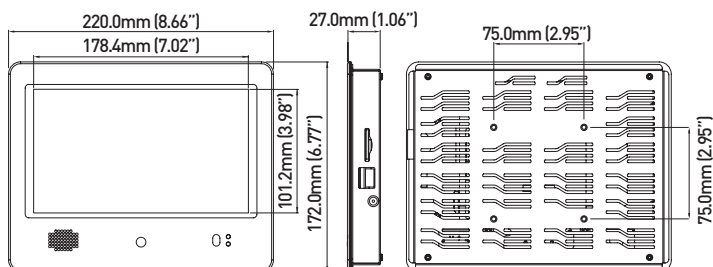

FEATURES

- High quality and cost-effective
- Low power consumption for cost savings
- Built-in WDR HD camera with motion sensing
- Built-in removable SD card for displaying advertising or corporate message
- On-board DVR included with SD card slot
- Switch between camera video and display advertisement on motion activity
- User definable text warning message
- Built-in alarm I/O
- Compatible management S/W (verint nextiva 6.x, march video sphere R5)

STANDARD LCD MONITORS

ANALOG PUBLIC VIEW MONITORS with BUILT-IN DVR

ANALOG PUBLIC VIEW MONITORS

IP PUBLIC VIEW MONITORS

SUNLIGHT VIEWABLE LCD MONITORS

TOUCH SCREEN LCD MONITORS

FLUSH MOUNT LCD MONITORS

BACK MOUNTABLE LCD MONITORS

WDL-EPVM10


10" Analog Public View Monitor with Built-In DVR



SPECIFICATION

Display		
Screen size	10.4"	
Resolution	800(W) × 600(H)	
Brightness	450cd/m ²	
Viewing angle	150(H) × 110(V)	
Contrast ratio	300:1	
Aspect ratio	16:9	
Response time	< 30ms	
Camera		
Image sensor	1/2.7" omnivision 1.3M progressive C-MOS	
Lens	Fixed 3.7mm F2.0	
Active pixel	1280(H) × 720(V)	
Frame rate	30fps	
Shutter	Rolling shutter	
Wide dynamic range	115dB	
Sensitivity	3650mV/Lux-sec	
Interface		
Storage	DVR	Internal micro SD card slot
	Storage media	External SD card slot
Alarm I/O	Terminal block 4P	
Speaker	1W mono speaker	
User I/F	User input I/F	Remote controller (coming soon)
	Indicators	Power, record LEDs
Mount	VESA™ 75 × 75mm	
Power		
Power adapter	DC 12V / 4A	
Power consumption	< 0.7A	
Environmental		
Operating temperature	0°C ~ +50°C (+32°F ~ +122°F)	
Humidity	10~90% RH, non condensing	
Dimensions		
Outline dimensions	254.0(W) × 232.0(H) × 27.0(D)(mm)	
Weight	950g (net weight)	

DIMENSIONS

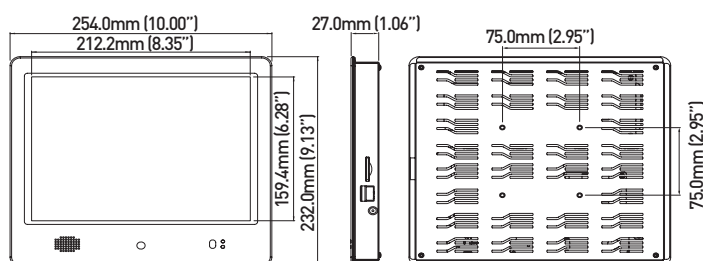

FEATURES

- High quality and cost-effective
- Low power consumption for cost savings
- Built-in WDR HD camera with motion sensing
- Built-in removable SD card for displaying advertising or corporate message
- On-board DVR included with SD card slot
- Switch between camera video and display advertisement on motion activity
- User definable text warning message
- Built-in alarm I/O
- Compatible management S/W
(verint nextiva 6.x, march video sphere R5)