

### Models

- 8-Zone Model
- 16-Zone Model

### Compatibility

- Wireless Rachio accessories
- Master valve / pump relay
- 3rd Party Sensors
- Normally closed (NC) rain sensors, freeze sensors, soil sensors
- Wired flow sensors (visit [rachio.com/flow](http://rachio.com/flow) for details)

### Wire Terminals


- Zones (#)
- C (*Common*)
- M (*Master Valve*)
- S1 (*Sensor 1*)
- S2 (*Sensor 2*)
- ACC - (*Sensor Power*)
- ACC + (*Sensor Power*)

### Electrical Specifications

- Transformer input: 120 VAC ~60Hz 300mA
- Transformer output: 24 VAC 1000mA
- Zone output (24 VAC): Compatible with 24VAC Solenoids
- Pump/master valve (24 VAC)
- Operating temperature: -13°F to 140°F

### Connectivity & Security

- IEEE 802.11 a/b/g/n 2.4 GHz and 5 GHz
- WPA and WPA2 (Personal) encryption
- DHCP (dynamic) or static IP addressing
- Transport Layer Security (TLS)
- 915MHz

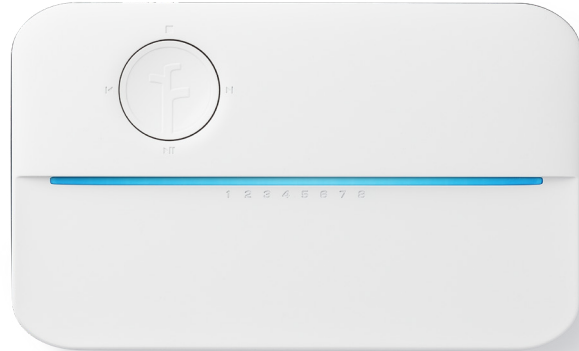

### Certifications

- UL, FCC, RoHS Compliant, EPA WaterSense & SWAT Approved

### Installation Requirements

- iOS or Android compatible device

### Warranty

- 4-year extended warranty

### Product Dimensions

- Dimensions of unit: 9.1" x 5.6" x 1.4"
- Weight: 1.05 lbs

