

Drive Reach OTR

SKU: 477154 **MAP:** \$519.99

FEATURES

- Boosts signal for trucks with the OTR Trucker Antenna.
- Modular, height-adjustable antenna, from 7.5 to 40 inches so it can be installed on any vehicle.
- For multiple devices and users.
- Works on ALL cellular devices with ALL carriers simultaneously.
- · Enhances talk, text, and high-speed data internet.

★ WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



Kit Includes



Drive Reach



Drive OTR Antenna (311229)



Slim Low-Profile Antenna (314401)



Mounting Bracket (901104)



Power Supply (850029)

Mast Extensions (1 13-inch, 1 18-inch) Coax Cable Side-Exit Adapter Antenna Spring Cable Adapter Thread Lock Packets

About

The **Drive Reach OTR** is our most powerful in-vehicle truck cell phone signal booster certified in the US, with Wilson Electronics* ruggedized, all weather OTR Truck Omni-Directional Antenna for maximum connection range and a 60% larger service range than the other boosters out there. The Drive Reach OTR boosts voice and data with max FCC-allowed 50 dB system gain, enhancing all available network signals, up to 32x. Drivers get fewer lost connections and dead zones, better audio quality, faster data uploads and downloads with this premier signal booster.

As with all weBoost boosters, all components needed for installation come in one package for easy DIY installation. The power supply plugs into CLA, while ignition power kits are also available. The Drive Reach OTR works with all cellular devices and all US carriers. The booster kit comes with parts to accommodate multiple installation options. Included are 2 mast extensions, 3-way antenna mount, side exit adapter, antenna spring, cable adapter, and thread lock packets.

All boosters come with a 2-year warranty.


Specifications

MODEL NUMBER	477154+	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2*	1900 MHz
MAX GAIN	50 dB	
IMPEDANCE	50 Ohm	
POWER	12V 1.8A	
CONNECTORS	SMA Female	
BOOSTER DIMENSIONS	6 x 4.5 x 1.5 in.	
BOOSTER WEIGHT	1.8 lbs.	

^{*}New frequency band utilized by Drive Reach OTR



Installation

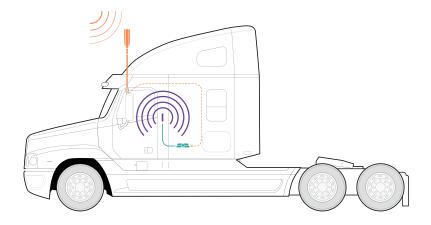

- Receives signal: The powerful antenna reaches out to access voice and data signals, and deliver them to the booster.
- **Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- Broadcasts signal: Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

Available Accessories

Optional Antenna Kits








Support

Package Dimensions

21 L x 11.5 W x 3.75 H









FRONT

SIDE

TOP/BOTTOM

WEIGHT

MASTER CARTON: 23 x 19 x 13 | 35.9 Lbs. | QTY 5



2-Year Warranty from Purchase.

Website: http://support.weboost.com

Phone: +1 866 294 1660 Monday to Saturday



UPC



