


BROADBAND POWER SPLITTERS

698 - 2700 MHz

BDA-PSx-W2

Product Features

- Passive devices designed in a multistage Wilkinson configuration
- Low insertion loss
- Low VSWR ripple
- Two, three and four output ports models available as standard, others available upon request
- Power input is 50W as splitter, and 1W as combiner, other values are available upon request

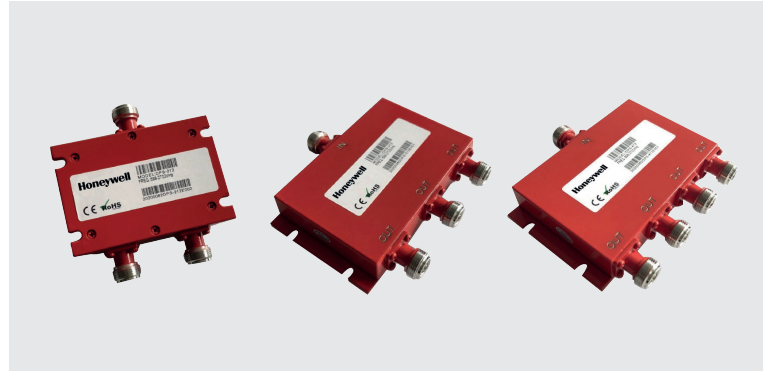


| Specification | BDA-PS2-W2 | BDA-PS3-W2 | BDA-PS4-W2 |
|--------------------------------|---|---|---|
| Type | Broadband power splitters | Broadband power splitters | Broadband power splitters |
| Frequency range | 698 – 2700 MHz | 698 – 2700 MHz | 698 – 2700 MHz |
| Number of ways | 2 | 3 | 4 |
| Split Loss | 3 dB | 4.8 dB | 6 dB |
| Insertion loss | < 0.5 dB | < 0.7 dB | < 0.7 dB |
| Power Rating | 50 W Average per port | 50 W Average per port | 50 W Average per port |
| VSWR | <=1.25 : 1 | <=1.3 : 1 | <=1.3 : 1 |
| Isolation between output ports | 20 dB min | 18 dB min | 18dB min |
| Connectors | N(f) | N(f) | N(f) |
| Temperature range, storage | -40° to 158° F -40° to +70° C | -40° to 158° F -40° to +70° C | -40° to 158° F -40° to +70° C |
| Temperature range, operation | -22° to 149° F -30° to +65° C | -22° to 149° F -30° to +65° C | -22° to 149° F -30° to +65° C |
| Environmental | IP60 | IP60 | IP60 |
| Dimension | 2.4 x 3.4 x 0.8 inches 62 x 88 x 22 mm | 2.7 x 4.8 x 0.88 inches 122 x 71 x 22 mm | 2.7 x 4.8 x 0.88 inches 71 x 122 x 22 mm |
| Weight | 0.5 lbs • 0.24 kg | 0.7 lbs • 0.34 kg | 0.79 lbs • 0.36 kg |

BROADBAND POWER SPLITTERS


698 - 2700 MHz

BDA-PSx-W2


BDA-PS2-W2

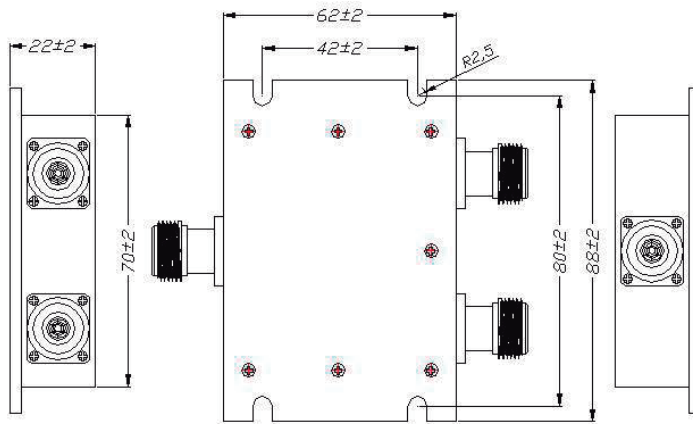

BDA-PS3-W2

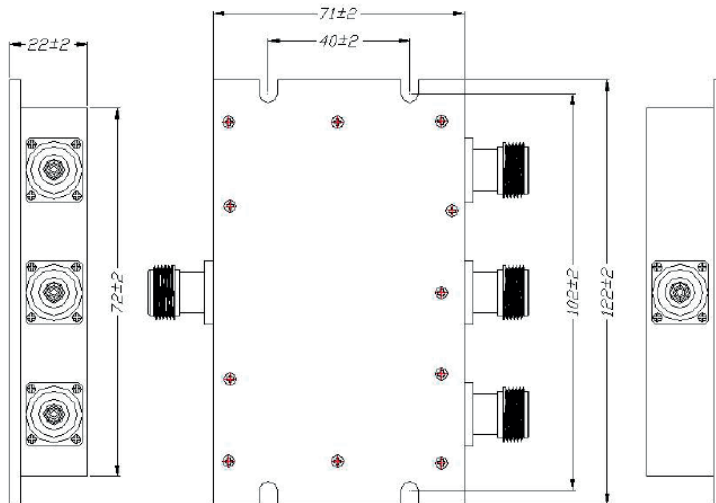

BDA-PS4-W2

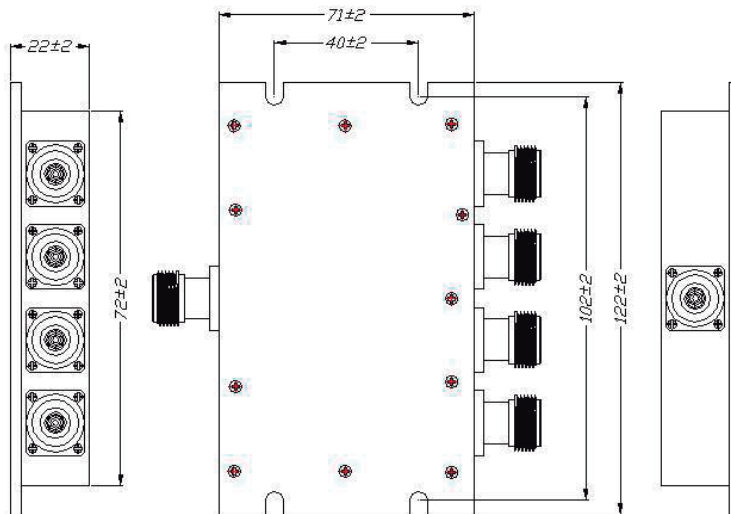

DOC HON-60278.05 • 10202020 • DMC

Honeywell Business Solutions
 715 Peachtree Street NE
 Atlanta, GA 30308
 www.honeywell.com

HON-60278.05 • 10202020
 ©2020 by Honeywell International Inc. All rights reserved.
 Unauthorized use of this document is strictly prohibited.
 This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.
 Country of origin: U.S.A.

**THE
 FUTURE
 IS
 WHAT
 WE
 MAKE IT**

Honeywell