

Product Highlights

Designed for Surveillance

The switches feature two modes: Standard Mode and Surveillance Mode, allowing the user to choose the interface most suitable for their needs

Surge Protection

6 kV surge protection on PoE ports shields the switch from power surges and lightning strikes to maximize network availability

Easy Management

A surveillance overview, DIP switch, ONVIF device support and video traffic optimization simplify the process of managing a surveillance network



DSS-200G Series

Gigabit Ethernet PoE Switches

Features

Physical

- High PoE budgets and support for IEEE 802.3bt 90 W PoE (DSS-200G-MPP Series)
- 6 kV surge protection on all PoE ports
- Fiber uplink ports for connection to a NVR or CMS center
- Alarm Port and four-stage PoE usage indicator light

Surveillance Network

- Fanless (DSS-200G-10MP)
- Easy deployment with automatic configuration
- Surveillance traffic optimization
- Auto-detect ONVIF devices
- Intuitive interface for monitoring and management
- Descriptive health diagnostics
- Surveillance VLAN

Management Features

- Client-based utility or web-based GUI
- Built-in SNMP MIB
- Status Dashboard
- Working Mode (DIP Switch)
 - QoS
 - Extend up to 250 Meters¹
 - Isolate
 - PD-Alive
 - STP (Spanning Tree Protocol)

The DSS-200G Series is a range of switches designed to meet the surveillance requirements of small, medium, and enterprise businesses. Support for high-powered Pan Tilt Zoom (PTZ) cameras, automatic Surveillance VLAN, and 6 kV surge protection make the DSS-200G Series ideal for IP surveillance deployments. A redesigned interface, a range of diagnostic and troubleshooting tools, and energy efficient technologies provide a flexible solution to your surveillance requirements.

Easy to Deploy

An interactive setup wizard removes the complexity from installing the switch for the first time. It allows you to choose the web interface mode (Standard or Surveillance), the IP address allocation method (static or DHCP), and the administrator user name and password. This completes the initial setup of the switch and automatically configures features such as Loop Detection, SNMP and Surveillance VLAN. An informative quick start guide shows you how to use the network diagram, and a network overview is displayed on the next page. D-Link and 3rd party devices are automatically detected and shown on the network overview page for easy administration.

Surveillance Traffic Optimization

The DSS-200G Series supports the automatic Surveillance VLAN feature. This automatically detects surveillance devices and puts them into the Surveillance VLAN, segmenting their traffic from the rest of the network. The feature enhances the security of the data and gives the traffic a higher priority through the switch, reducing the chances of the video freezing or being delayed on live streams. A single switch can be used for both surveillance and data networks, removing the need for dedicated surveillance hardware and reducing maintenance costs.

Intuitive Web Interface

A redesigned Surveillance interface makes surveillance features more accessible than ever. The choice between Standard and Surveillance modes can be made during switch setup, allowing the user to choose the interface that best suits their requirements. A network overview shows which devices are connected to which ports, and ONVIF device support allows the switch to recognize both D-Link and third party IP cameras and Network Video Recorders (NVRs). With monitoring, management, and troubleshooting tools built into a single interface, the DSS-200G Series provides everything you need to manage your surveillance network.

DSS-200G Series Gigabit Ethernet PoE Switches

Easy Troubleshooting


The DSS-200G Series features Loopback Detection and Cable Diagnostics to help network administrators find and solve network problems quickly and easily. Loopback Detection detects loops in the network, where multiple devices have been connected to each other and create a forwarding loop. The switch will identify the port causing the loop and shut the affected port down to avoid network instability. Cable Diagnostics can be used to remotely test the quality of copper cables, recognize the cable type, and detect cable errors.

PoE Support

The DSS-200G Series provides support for Power over Ethernet (PoE), reducing deployment time for IP cameras, VoIP phones, and access points. The DSS-200G-10MPP and DSS-200G-28MPP support IEEE 802.3bt, providing up to 90 watts on selected ports for the latest high-powered Pan Tilt Zoom (PTZ) cameras. All switches in the DSS-200G Series support IEEE 802.3af and 802.3at, providing up to 30 watts per port. This, combined with high power budgets, ensures all of your critical surveillance infrastructure can be powered from a single switch.

DIP Switches for Easy Configuration


The DIP switches allow administrators to quickly deploy the switch for various application scenarios without having to apply the settings via the Web GUI. For example, the Extend setting on the DIP switch activates long-distance transmissions for connections up to 250 meters. The DIP switches are also easy access for personnel without IT knowledge to quickly adjust application settings.

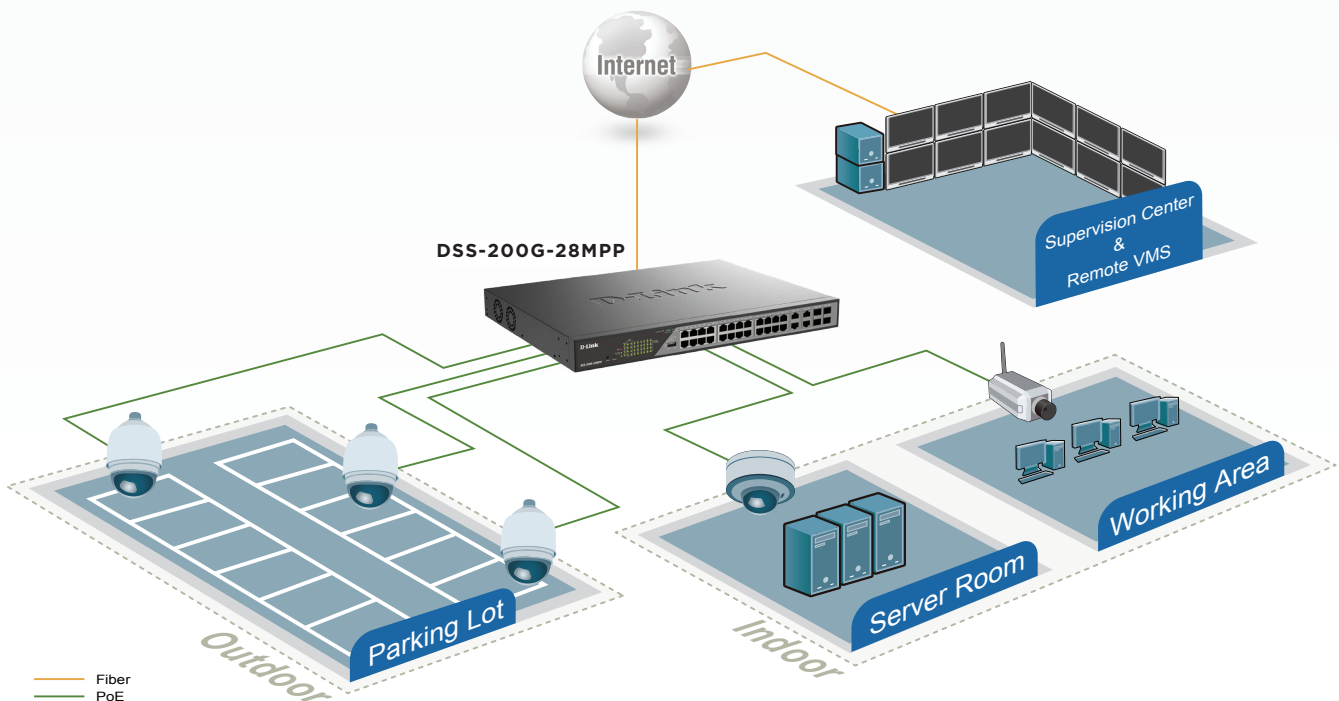


Example Surveillance Topology

DSS-200G Series Gigabit Ethernet PoE Switches

Surveillance Topology Web Interface Screenshot

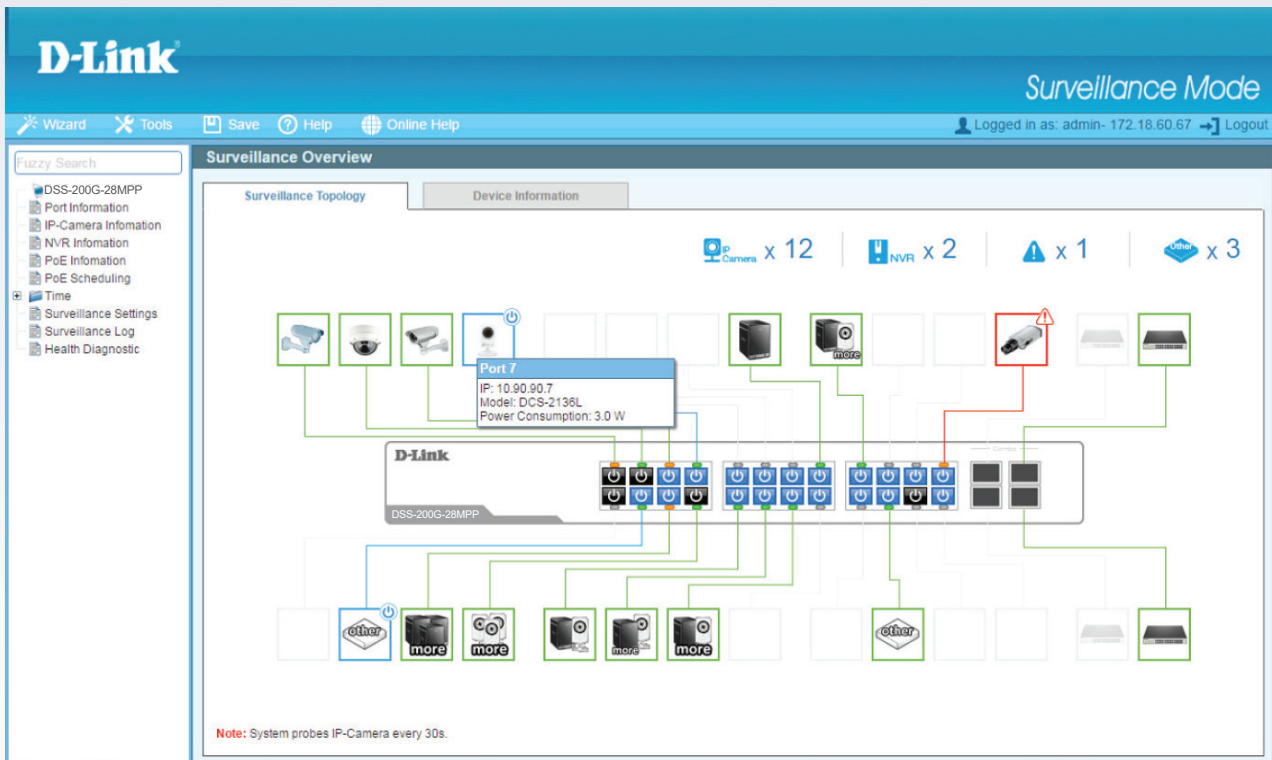

Device Information Web Interface Screenshot

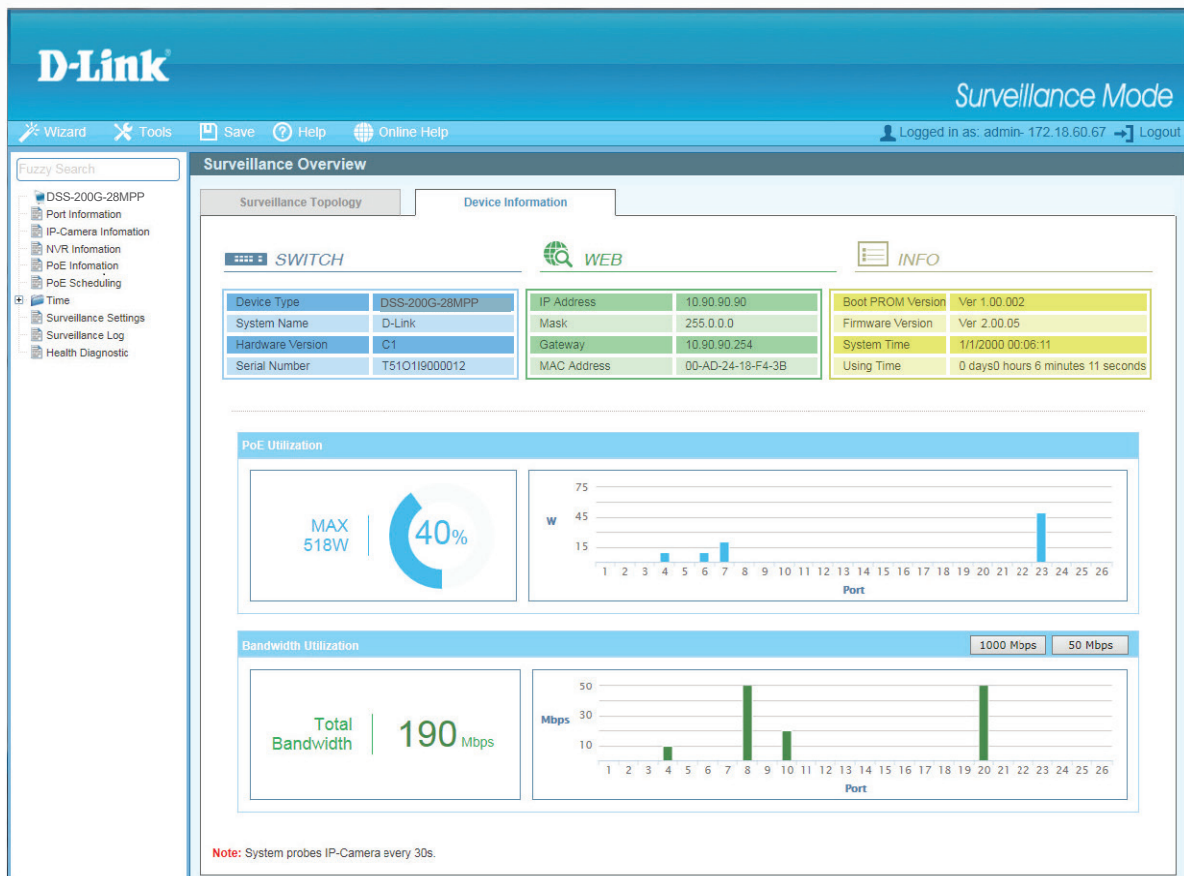

DSS-200G Series Gigabit Ethernet PoE Switches

Technical Specifications				
General	DSS-200G-10MP	DSS-200G-10MPP	DSS-200G-28MP	DSS-200G-28MPP
Hardware Version	A1			
Size	<ul style="list-style-type: none">• 11-inch desktop size²• 1U height	<ul style="list-style-type: none">• 11-inch desktop size²• 1U height	<ul style="list-style-type: none">• 19-inch rackmount size• 1U height	<ul style="list-style-type: none">• 19-inch rackmount size• 1U height
Number of Ports	<ul style="list-style-type: none">• 8 x 10/100/1000 Mbps PoE• 2 x SFP 1000 Mbps	<ul style="list-style-type: none">• 8 x 10/100/1000 Mbps PoE• 2 x SFP 1000 Mbps	<ul style="list-style-type: none">• 24 x 10/100/1000 Mbps PoE• 4 x Combo 1000 Mbps	<ul style="list-style-type: none">• 24 x 10/100/1000 Mbps PoE• 4 x Combo 1000 Mbps
Port Functions	<ul style="list-style-type: none">• IEEE 802.3 compliant• IEEE 802.3u compliant• IEEE 802.3ab compliant• IEEE 802.3af/802.3at compliant• IEEE 802.3bt (DSS-200G-10MPP/28MPP only)• IEEE 802.3x Flow Control supports full-duplex mode		<ul style="list-style-type: none">• Supports manual/auto MDI/MDIX configuration• Auto-negotiation• Supports half/full-duplex operation• IEEE 802.3az compliant	
Performance				
Switching Capacity	20 Gbps		56 Gbps	
Maximum Forwarding Rate	14.88 Mpps		41.67 Mpps	
MAC Address Table Size	8K Entries			
Packet Buffer	4.1 MBits			
CPU Memory	DDR3 128 MB			
Flash Memory	32 MB			
LEDs				
Power (per device)	✓			
Link/Active/Speed (per port)	✓			
Alarm	✓			
PoE Budget Usage	25%, 50%, 75%, 100% (LED * 4)			
PoE				
PoE Standard	<ul style="list-style-type: none">• IEEE 802.3af• IEEE 802.3at	<ul style="list-style-type: none">• IEEE 802.3af• IEEE 802.3at• IEEE 802.3bt	<ul style="list-style-type: none">• IEEE 802.3af• IEEE 802.3at	<ul style="list-style-type: none">• IEEE 802.3af• IEEE 802.3at• IEEE 802.3bt
PoE Capable Ports	Ports 1 to 8		Ports 1 to 24	
PoE Power Budget	<ul style="list-style-type: none">• 130 W• 30 W max. per PoE port	<ul style="list-style-type: none">• 242 W• 90 W max. per PoE port for ports 1 to 8	<ul style="list-style-type: none">• 370 W• 30 W max. per PoE port	<ul style="list-style-type: none">• 518 W• 90 W max. per PoE port for ports 1 to 8• 30 W max. per PoE port for ports 9 to 24
Power Consumption				
Standby Mode	10.4 W	10.7 W	15.12 W	15.19 W
Maximum Power Consumption	<ul style="list-style-type: none">• 160.2 W (PoE on)• 9.63 W (PoE off)	<ul style="list-style-type: none">• 267.5 W (PoE on)• 15.4 W (PoE off)	<ul style="list-style-type: none">• 425.9 W (PoE on)• 25.5 W (PoE off)	<ul style="list-style-type: none">• 579.3 W (PoE on)• 23.52 W (PoE off)
Physical				
Power Input	<ul style="list-style-type: none">• 100 to 240 V AC• 50 to 60 Hz internal power supply			
MTBF	345,045 hours	508,112 hours	331,732 hours	289,075 hours

DSS-200G Series Gigabit Ethernet PoE Switches

Acoustics	0 dB(A)	50.6 dB(A)	53 dB(A)	55 dB(A)
Heat Dissipation	103.05 BTU/hr	87.00 BTU/hr	190.74 BTU/hr	209.16 BTU/hr
Weight	1.55 kg (4.42 lbs)	2.05 kg (4.52 lbs)	2.86 kg (6.30 lbs)	4.71 kg (10.38 lbs)
Dimensions	280 x 180 x 44 mm (11.02 x 7.08 x 1.73 in)	280 x 230 x 44 mm (11.02 x 9.05 x 1.73 in)	440 x 208 x 44 mm (17.32 x 8.18 x 1.73 in)	440 x 330 x 44 mm (17.32 x 12.99 x 1.73 in)
Fans	N/A (Fanless)	1	2	
Operating Temperature	-5 to 50° C (23 to 122° F)			
Storage Temperature	-40 to 70 °C (-40 to 158 °F)			
Operating Humidity	0% to 95% non-condensing			
Storage Humidity	0% to 95% non-condensing			
EMI	FCC/IC, CE, BSMI			
Safety	cUL, UL, LVD, CB, BSMI			

Working Modes (DIP Switch)

QoS (Port Priority)	Ports 1-8	Ports 1-8	Ports 1-24	Ports 1-24
Extend (Up to 250M @ 10 Mbps)	DIP: Ports 1-4 Web GUI: Ports 1-4	DIP: Ports 1-4 Web GUI: Ports 1-8	DIP: Ports 1-8 Web GUI: Ports 1-8	DIP: Ports 1-8 Web GUI: Ports 1-8
Isolate (Traffic Isolation per Port)	Ports 1-8	Ports 1-8	Ports 1-24	Ports 1-24
PD-Alive	Ports 1-8	Ports 1-8	Ports 1-24	Ports 1-24
STP	Ports 7-8	Ports 7-8	Ports 25-28	Ports 25-28

Software Features

VLAN	<ul style="list-style-type: none"> Port-based VLAN 802.1Q Tagged VLAN Auto Surveillance VLAN Voice VLAN Management VLAN 	<ul style="list-style-type: none"> Asymmetric VLAN VLAN Group <ul style="list-style-type: none"> Supports 128 static VLAN groups Max. 4094 VIDs
L2 Features	<ul style="list-style-type: none"> Flow Control <ul style="list-style-type: none"> 802.3x Flow Control Jumbo Frames up to 10,240 Bytes IGMP Snooping <ul style="list-style-type: none"> IGMP v1/v2 Snooping Supports 64 Groups IGMP Snooping Querier 802.3ad Link Aggregation: <ul style="list-style-type: none"> DSS-200G-10MP: Supports 8 groups per device and 8 ports per group DSS-200G-28MP: Supports 8 groups per device and 8 ports per group DSS-200G-10MPP: Supports 8 groups per device and 8 ports per group DSS-200G-28MPP: Supports 8 groups per device and 8 ports per group Ethernet Ring Protection Switching Loopback Detection 	<ul style="list-style-type: none"> Cable Diagnostics LLDP Port Mirroring <ul style="list-style-type: none"> One-to-One Many-to-One Statistics <ul style="list-style-type: none"> Tx Ok Tx Error Rx Ok Rx Error Spanning Tree Protocol <ul style="list-style-type: none"> 802.1D STP 802.1w RSTP
Quality of Service (QoS)	<ul style="list-style-type: none"> 802.1p Quality of Service 4 queues per port Queue Handling <ul style="list-style-type: none"> Strict Weighted Round Robin (WRR) 	<ul style="list-style-type: none"> Port-based Bandwidth Control (Rate Limiting) <ul style="list-style-type: none"> Ingress : 16 Kbps, Egress : 16 Kbps
Security	<ul style="list-style-type: none"> D-Link Safeguard Traffic Segmentation Broadcast/Multicast/Unknown Unicast Storm Control 	<ul style="list-style-type: none"> DoS Attack Prevention SSL
Management	Web-based GUI (Supports IPv4/IPv6)	

DSS-200G Series Gigabit Ethernet PoE Switches

Green Technology	<ul style="list-style-type: none"> • Power Saving by <ul style="list-style-type: none"> • Link Status • LED Shut-Off • Port Shut-Off • System Hibernation 	<ul style="list-style-type: none"> • Compliant with IEEE 802.3az Energy-Efficient Ethernet • Time-based PoE
MIB/RFC Standards	<ul style="list-style-type: none"> • RFC768 UDP • RFC791 IP • RFC792 ICMP • RFC793 TCP • RFC826 ARP • RFC1213 MIB II • RFC1493 Bridage MIB • RFC1907 SNMPv2 MIB • RFC1215 MIB Traps Convention 	<ul style="list-style-type: none"> • RFC2233 Interface Group MIB • RFC2665 Ether-like MIB • RFC4363 IEEE 802.1p MIB • ZoneDefense MIB • Private MIB • RFC951 BootP client • RFC1542 BootP/DHCP client • RFC2236 IGMP Snooping

Order Information	
Part Number	Description
DSS-200G-10MP	8 Port 10/100/1000 Mbps + 2 Port SFP 1000 Mbps PoE switch
DSS-200G-28MP	24 Port 10/100/1000 Mbps + 4 Port Combo 1000BASE-T/SFP PoE switch
DSS-200G-10MPP	8 Port 10/100/1000 Mbps + 2 Port SFP 1000 Mbps PoE switch
DSS-200G-28MPP	24 Port 10/100/1000 Mbps + 4 Port Combo 1000BASE-T/SFP PoE switch
Optional SFP Transceivers	
DEM-310GT	1000BASE-LX, single-mode, 10 km
DEM-311GT	1000BASE-SX, multi-mode, 550 m
DEM-312GT2	1000BASE-SX, multi-mode, 2 km
DEM-314GT	1000BASE-LHX, single-mode, 50 km
DEM-315GT	1000BASE-ZX, single-mode, 80 km
DEM-330T	1000BASE-BX-D, single-mode, 10 km
DEM-330R	1000BASE-BX-U, single-mode, 10 km
DEM-331T	1000BASE-BX-D, single-mode, 40 km
DEM-331R	1000BASE-BX-U, single-mode, 40 km

¹ The 250m long range mode is subject to cabling quality and/or IP camera's electrical design. Compatibility testing is recommended prior to use. UTP CAT5e rated cables (or higher) are required.
² 19-inch rack-mounting brackets included.

Updated 2023/05/29