

## CM-SR Series Receiver and Transmitters



CM-SRFM2  
Wireless Kit

CM-SR Series wireless system includes a high security stand-alone wireless receiver with (2) Form 'C' relay outputs. The receiver features a rugged construction with a built-in antenna for mounting indoors or outdoors.

CM-SR Series wireless systems are designed to activate locking devices, such as magnetic locks and electric strikes, and automatic gate and door operators. Ideal for one or two door access control, in retail, commercial, and healthcare facilities. The rugged IP65 rated components are also perfect for gate or parking garage applications.

Ultra compact two button transmitters are built tough, with 100ft min. range (line of sight) and a system kit is available, complete with (1) receiver and (2) two button fobs.



### Features

#### CM-SRX2 Relay Receiver

- 868Mhz. high security rolling code, with 19 trillion combinations
- 2-channel receiver
- 1st relay momentary, 2nd relay momentary or latching operation
- 30 transmitters (fobs) capacity
- Easy transmitter enrollment
- Built-in antenna
- IP65 rated weather-resistant enclosure
- Kit includes (1) receiver and (2) two button fobs

#### CV-WTX2 Two Button Fob

- Ultra compact fob transmitter
- Rugged water-resistant construction
- 2-year battery life and low battery indication



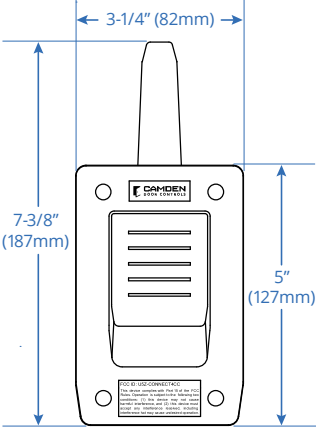
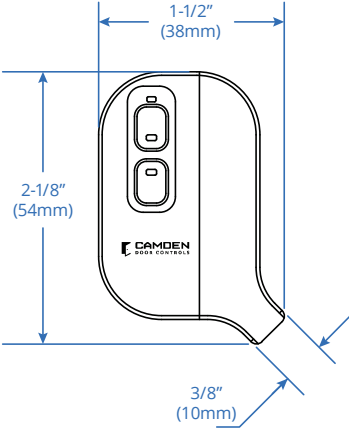
## SPECIFICATIONS

CM-SRX2 Relay Receiver	CV-WTX2 Two Button Fob
Voltage: 12/24V, AC/DC	Voltage: 3 VDC, CR2023 type battery
Frequency: 868.35Mhz.	Current Draw: 12mA
Current Draw (Max) 80mA	Operating Temp: -4F to 185F (-20C to +85C)
Relay: (2) SPDT contact rated 1A @ 30 VDC	Dimensions: 1-1/2"W x 2-1/8"H x 3/8"D (38mm x 54mm x 10mm)
Operating Temp: -4F to 185F (-20C to +85C)	
Dimensions: 3-1/4"W x 7-3/8"H x 1-5/8"D (82mm x 187mm x 41mm)	

## ORDERING INFORMATION

CM-SRX2	2 channel 868 Mhz. wireless receiver
CV-WTX2	Ultra compact two button key fob
CM-SRFM2	Secure wireless kit, includes (1) CM-SRX2 wireless receiver and (2) CV-WTX2 two button key fobs

## DIMENSIONS

CM-SRX2 Relay Receiver	CV-WTX2 Two Button Fob
 <p>3-1/4" (82mm)</p> <p>7-3/8" (187mm)</p> <p>5" (127mm)</p> <p><b>Front View</b></p> <p>1-5/8" (41mm)</p> <p>5/8" (16mm)</p> <p>1/8" (3mm) Mounting Hole (2 Places)</p> <p>3-7/8" (98mm)</p> <p>1-5/8" (41mm)</p> <p><b>Side View</b></p> <p><b>Back View</b></p>	 <p>1-1/2" (38mm)</p> <p>2-1/8" (54mm)</p> <p>3/8" (10mm)</p> <p><b>Front View</b></p> <p>3/8" (10mm)</p> <p>1-1/4" (32mm)</p> <p>2" (51mm)</p> <p><b>Side View</b></p> <p><b>Back View</b></p> <p>Model: CFSRNLIT-2-CAM IC: 3872-COMM FCC ID: U5C2-SUMINI</p>

**CAMDEN** DOOR CONTROLS Opening New Doors to Innovation, Quality, and Support!

5502 Timberlea Blvd. Mississauga, ON Canada L4W 2T7 • Toll Free: 1 877 226-3369 (CAMDEN9)  
Tel: (905) 366-3377 • Fax: (905) 366-3378 • E-mail: info@camdencontrols.com • www.camdencontrols.com



Part #: MKTG-LIT-SP-CM-SR SERIES