

The ClearOne Ceiling Microphone Array enhances any conferencing application which demands high-quality audio. Easily installed and affordable, the Ceiling Microphone Array delivers exceptional audio quality.

Featuring three wide-range microphones mounted together into a single unit array, the Ceiling Microphone Array provides the rich sound of three individual unidirectional microphones while maintaining full 360-degree coverage.



Applications

- Medium to Large Conference Rooms
- Boardrooms
- Overflow Areas
- Training Rooms
- Courtrooms
- Distance Learning Centers
- Convention Centers and Hotels


Features

- Interference Protection**
 - + RF hardened and shielded for immunity from interference
- Superior Audio Performance**
 - + Full 360-degree coverage
 - + Three unidirectional elements reduce reverberation and noise
 - + Design minimizes noise pickup from ceiling sources
- Compatibility**
 - + Optimized to work with ClearOne mixers - CONVERGE Pro, INTERACT Pro, INTERACT Pro 8i, INTERACT AT
- Expandability**
 - + Multiple* ceiling microphone arrays can be connected to any ClearOne mixer for covering a large room space
- Easy Setup**
 - + Standard CAT5 Ethernet cable runs back to the mixer
 - + Designed for quick installation into drop ceiling tiles
 - + Includes 12" and 24" drop down cables for varying ceiling heights
- Minimal Visibility**
 - + Sleek unobtrusive design
 - + Frees table area while maintaining speech quality and intelligibility
 - + Compact size: 3.3" x 1.5" (83.8 mm x 38.1 mm)

* The number of ceiling microphone arrays depends on the maximum number of microphone inputs supported by the mixer.



> COMPONENTS

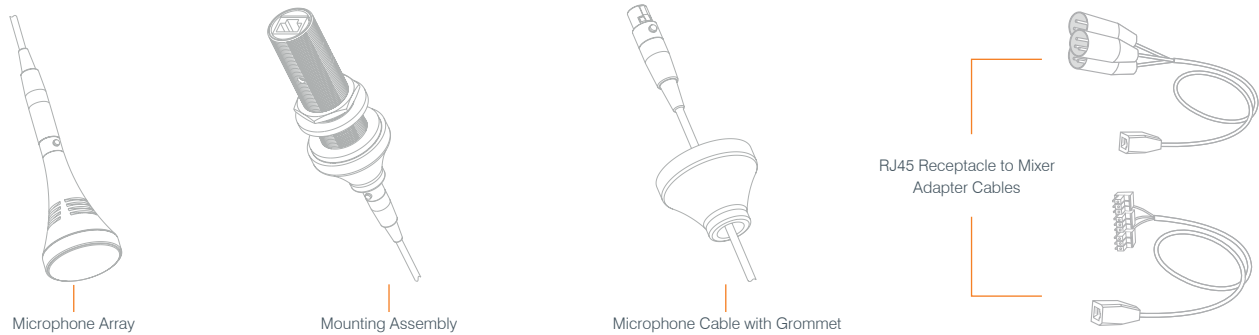

Functional Specifications

ACOUSTIC CHARACTERISTICS

Polar Pattern: Cardioid
 Dynamic Range: 80 dB, 1 kHz @ max SPL
 Signal/Noise Ratio: 60 dBA, 1kHz @ 1Pa
 Frequency Response: 100 Hz - 12kHz
 Sensitivity: 114 mV/Pa

ELECTRICAL CHARACTERISTICS

Element: Fixed-charge back plate permanently polarized condenser
 Phantom Power Requirement: 12-52 vdc, 2 mA typical
 Impedance: 200 Ω

CABLES INCLUDED

12-inch and 24-inch 4-pin mini-XLR drop-down cable
 25-foot RJ45 male to RJ45 male CAT5e
 RJ45 receptacle to mixer adapter cable

MOUNTING

Ceiling tile pass-through mounting assembly
 Max cable length from array to mixer: 300 ft (91.44m)

MECHANICAL

DIMENSIONS

(W x D x H): 3.3" x 1.5" (83.8 mm x 38.1 mm)

WEIGHT

2.2 lbs (1 kg)

ENVIRONMENTAL

OPERATING TEMPERATURE

-4° to 158° F (-20° to 70° C)

PART NUMBERS

910-001-013-W - White Ceiling Microphone Array kit for CONVERGE Pro and INTERACT Pro (includes RJ45 receptacle to Mini-Phoenix mixer adapter)


910-001-013-B - Black Ceiling Microphone Array kit for CONVERGE Pro and INTERACT Pro (includes RJ45 receptacle to Mini-Phoenix mixer adapter)

910-001-014-W - White Ceiling Microphone Array kit for INTERACT AT (includes RJ45 receptacle to XLR-M mixer adapter)

910-001-014-B - Black Ceiling Microphone Array kit for INTERACT AT (includes RJ45 receptacle to XLR-M mixer adapter)

(Each kit includes Microphone Array Module, Mounting base, 12 and 24 inch drop-down cables, 25 foot RJ45 plenum rated CAT5e cable, RJ45 receptacle to mixer adapter cable.)

PICK-UP PATTERN

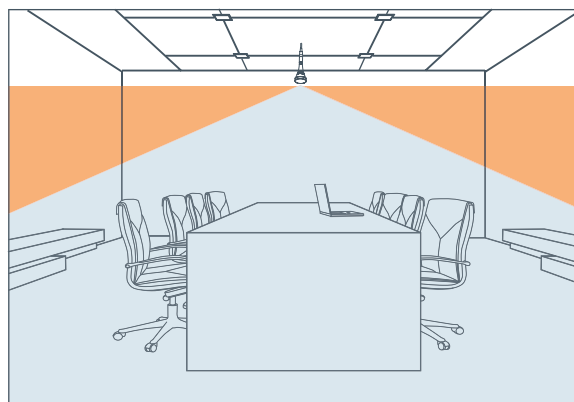

120° from array
(Best pick-up)

180° from array
(Good pick-up)

ClearOne Contacts

North America
 Tel: 801-975-7200
 Toll Free: 800-945-7730
 TechSales: 1-800-707-6994
 Fax: 801-303-5711
 sales@clearone.com

Europe & Oceania
 Tel: +44 (0) 1189 036 053
 global@clearone.com

Asia Pacific
 Tel: +852 3590 4526
 global@clearone.com

Latin America
 Tel: 801-974-3621
 global@clearone.com

Middle East
 Tel: +852 3590 4526
 global@clearone.com

Other product names may be registered trademarks of their respective owners who do not necessarily endorse ClearOne or ClearOne's products. All rights reserved. Information in this document subject to change without notice. © 2013 ClearOne. 802-225-101-DS Revision 2.0 October 2013.