



6171



6172



6173



6174



6175



6176

## 6170 Series Weatherproof Pushbutton

Commercial grade weatherproof pushbutton. Button is 3/4" diameter white thermoplastic raised dome, rated IP68 water-tight (up to 1 meter), IP64 moisture-proof, and IP64 dust-tight. Single gang plate, includes weatherproof faceplate gasket and tamper-resistant faceplate screws. Green LED backlit button on all models, field selectable 12/24 VDC. All models are momentary-action SPDT-Double Break (FORM Z)

Contact Rating: 3 A @ 115VAC

Operating temperature rating: -67°F to +185°F




MODEL	PRODUCT	WEIGHT
6171	Blank Faceplate	.3 Lbs.
6172	Faceplate Silkscreened "EXIT"	.3 Lbs.
6173	Faceplate Silkscreened "EXIT/SALIDA"	.3 Lbs.
6174	Faceplate Silkscreened "EXIT/SORTIE"	.3 Lbs.
6175	Faceplate Silkscreened "PUSH TO UNLOCK"	.3 Lbs.
6176	Faceplate Silkscreened "PUSH TO OPEN"	.3 Lbs.

## OPTIONS

BBX	Weatherproof Surface Back Box - 2 <sup>5</sup> / <sub>8</sub> " deep
CSF	Custom Silkscreened Faceplate - Consult factory for price and delivery
SF	Special Finish Faceplate - US32D standard, see page 56 for other finishes
ATS	Anti-Tamper Switch

## Door Handing

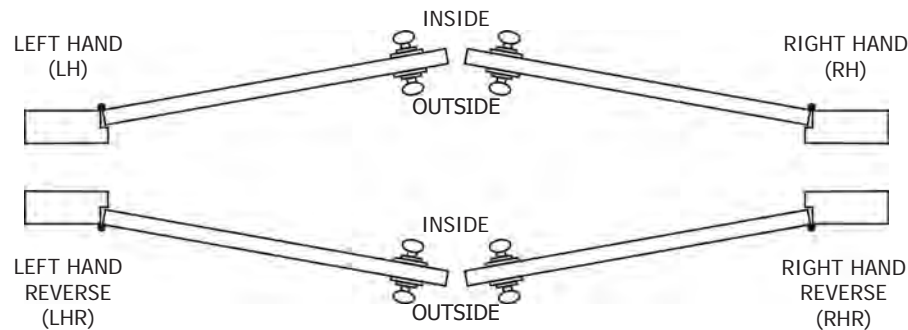

DOOR HAND DETERMINED FROM OUTSIDE

## Architectural Finish Reference

FINISH DESCRIPTION	U.S. STANDARD REFERENCE NO.	BHMA REFERENCE NO.
Satin Alum	US28	628
Bright Brass	US3	605
Satin Brass	US4	606
Light Bronze	US10	612
Medium Bronze	US13	617
Dark Bronze	US10B	613
Black Satin	US19	631
Bright Chrome	US26	625
Satin Stainless Steel	US32D	630

## Switch Contact Forms

