Standard Features for Telephone Entry

- Stand alone functionality or seamless integration with Keri's access control system and Doors.Net software for real access control and telephone entry integration
- Scalable font (3/8" or 1/2") LCD display, selectable 7 or 10 name display, Lexan™ cover
- Three 80 character, programmable, scrolling pages for instructions and messages with automatic timed rotation
- Capacity for up to 5,000 tenant phone numbers
- Up to 6-digit directory code, up to 5-digit Entraguard ID codes (PINs), up to 15-digit telephone numbers
- Networkable to manage multiple doors via RS-485, TCP/IP (via LAN-50)
- Time Zone restrictions for calling tenants and for PINs
- Links a visitor to the resident who allowed entry
- Two selectable and assignable output relays, heavy-duty door relays
- Telephone entry units and access control units can be combined on a single network for a total of 128 controller units
- Stores up to 3,640 events, manages up to 255 individual sites
- Flexible connectivity to host PC: RS-232, Modem, TCP/IP
- Weather and vandal resistant housing
- Programmable talk time, tone dialing, adjustable volume
- Quick disconnect terminals, built-in surge protection, non volatile memory
- Two Mylar[™] speakers with superior sound
- Door forced open and door held open alarms
- Powerful Doors.Net Access Control Software with full access control features: time zones, temporary users, online programming, operator security levels, multiple site management and automatic configuration

The **Entraguard Platinum** is Keri's telephone entry product with the largest capacity and biggest display Keri offers. The Platinum has a 5,000 tenant capacity, more than enough to handle nearly any large commercial or residential project, and also has two large font sizes, adjustable on demand by the visitor. This entry panel is available at a price well below competitive large capacity systems on the market. A no-phone-line system is available as an option.

The Platinum is designed to be durable and weather resistant, with a tough, 14-gauge, stainless steel enclosure. Additionally, the Platinum can be fitted with a PXL-500 Tiger Controller and SB-593 Satellite Expansion Board to provide a 1 or 2 door card access system within the same unit.

Like its sister products, the Entraguard Silver and Titanium, the Platinum provides the best telephone entry/access control marriage by letting the unit function as a node on a PXL controller network, putting both applications under the acclaimed Doors.Net software umbrella for a seamless integration of the two. Each Entraguard Platinum also has two extra relay outputs that can be used in a variety of ways, including turning on a lobby light, unlocking an interior door, or providing access to two separate entrances, by different tone commands from the tenant's location or based on an access granted decision. An on-board modem is also included for remote programming.





EGP-5000 Entraguard Platinum

DATA SHEET - Page 2 of 2

Access Control Features

- True, integrated access control with PXL-500 or NXT controllers the Platinum becomes part of a Keri access control network
- Simple, one button auto-configuration
- 32 time zones, 3 holiday schedules
- Unlimited access control groups
- Automatically expiring Entraguard IDs (PINs) and cards
- Time Zones on Entraguard IDs (PINs) and cards, as well as doors and gates
- Full reporting of events
- Direct door operation from PC
- Automatic lock and unlock of doors and gates
- Assignable inputs and outputs (when using an optional SB-593 on a PXL-500)
- Rollcall/track, muster
- Image capture and optional badge printing
- Remote online management of multiple sites
- System operator security levels with configurable privileges

Special Telephone Entry Features

- Do not Disturb Call Feature programmable for individual tenants
- Do not Display Name Feature programmable on a per tenant basis
- Remote online management of multiple sites
- Ability to link visitors to the residents who allowed them entry
- Ability to update several units in one pass

General Features:

- Surface or recess mount
- Weather and vandal resistant housing
- Postal lock provision
- Non-volatile memory
- Built-in surge protection plus surge protection kit
- Programmable talk time
- Door forced open and door held open alarms
- Tone dialing
- Heavy-duty output relays
- Adjustable volume control
- Maintenance free LED lighting
- Two Mylar[™] speakers with superior sound
- Quick disconnect terminals


Specifications:

- Capacity: Up to 5,000 Tenants
- Outputs: Door Relay, Alarm Relay, 2 additional programmable relays (continued next column)

- Operating Temperature: +5° to 140° F (-15° to 60° C) with heater: -20° to 140° F (-29° to 60° C)
- Input Power: 12 VDC @ 1 A
- Current Draw: 750 mA (Platinum unit)
- Relay Contact Rating: 1 A @ 24 VDC
- Size: 13.88" H x 10.34" W x 3.5" D (35.3 cm x 26.3 cm x 8.9 cm) Weight: 12.30 lbs (6.09 kg)
- Material: 14 gauge stainless steel
- Warranty: 2 years
- Finish: Brushed Stainless Steel

Options / Accessories:

- Camera
- Postal Lock
- Hooded Enclosure/Pedestal Mount
- Recessed Wall Mount Kit
- Heater (for operation below 5° F/-15° C)
- No Phone Line System

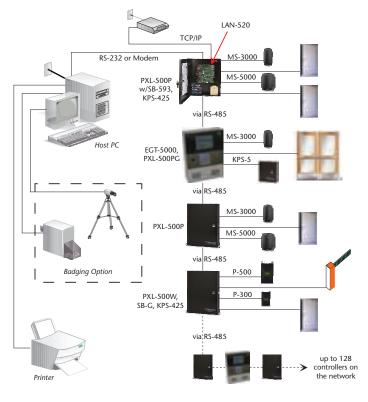

ORDERING INFORMATION:

	Model #	Description
	EGP-5000HF	Entraguard Platinum Telephone Entry
*For pre-installed color camera, add "-CO" to the above r		Nor camera add "-CO" to the above model number

RELATED PRODUCTS:

Model #	<u>Description</u>
CU-EGP-5000	Firmware upgrade for Platinum Entraguard unit
EGS-WUPW	Entraguard Walk-Up Package (includes EGS-750,
	PXL-500GW, P-300, KDP-552, boxed and prewired)
EGS-WUPP	Entraguard Walk-Up Package (includes EGS-750,
	PXL-500GP, MS-3000, KDP-552, boxed and prewired)
EGH-12	Heater Kit for Entraguard Units
EGP-PL	Platinum/Silver Postal Lock Kit - Field Installation
EPS-58	Power Supply Kit for Entraguard Units
FMK-95	Recess Mount Kit for Platinum/Silver
HSE-95	Hood/Pedestal Mount Adapter for Platinum/Silver

Specifications are subject to change without notice.

All trademarks are the property of their respective owners.

When using Entraguard products in a dial-up application, Keri requires the use of an approved modem. Please refer to the Recommended Peripherals list on the web site or contact Keri customer service.



Presented By: