

OMNI INDOOR ANTENNA

380 - 698 / 698 - 960 / 1710 - 2700 MHz

BDA-OIA-3851-6996


Product Features

- Broad Band, Low VSWR
- Support current main popular communication system
- ABS Radome
- Ceiling mount, easy to install



Electric Specifications	Value		
Freq. Range	380-698	698-960	1710-2700
Gain-dBi(max)	2±1.5	3±1.5	6.5±1.5
VSWR	≤2.5	≤2.5	≤1.7
Vertical Beamwidth-° (Typical value)	85	60	25
Impedance	50Ω		
Polarization	Vertical		
Max.Power	50W		
Connector	N Female or customized		
Dimension	12.60 x 6.88 inches • (Φ320×175)±2mm		
Weight	1.54 lbs (0.7±0.2 kg)		
Operating temperature	-40 to 140 F		
Radome color	White		
Mounting way	Fixed with Nut		

Installation Sketch

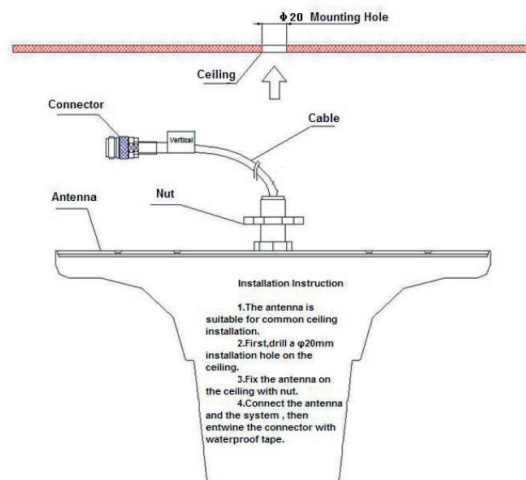

DOC HON-621 34.00 • 12282020 • DMC

Honeywell Building Technologies
 715 Peachtree Street NE
 Atlanta, GA 30308
 www.honeywell.com

HON-62134.00 • 12282020 • DMC
 ©2020 by Honeywell International Inc. All rights reserved.
 Unauthorized use of this document is strictly prohibited.
 This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.
 Country of origin: U.S.A.

**THE
 FUTURE
 IS
 WHAT
 WE
 MAKE IT**

Honeywell