



Key Feature

- 2-wire IP distributor
- 6 2-wire cascade interfaces without device power supply
- 8 interface indicators, 1 RJ-45 Interface, 1 Reset button
- Din rail mounting, 24VDC

Specification

Device interfaces

Network interface	1 RJ45
Two-wire interface	8(2 for casacading, 6 for device with out power)
Signal indicator	8
Power indicator	1
Reset	1


General

Power supply	24 VDC
Power consumption	NA
Working temperature	-10 ° C to 55 ° C (14 ° F to 131 ° F)
Working humidity	10% to 90%

Available Model

DS-KAD706Y-SP

Dimension

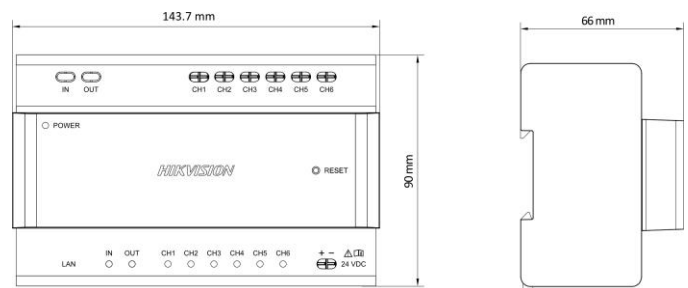

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

