



## Data Cable, Network, CCTV, PoE & Industrial Test Solutions

Test Equipment Depot - 800.517.8431 - 5 Commonwealth Ave, MA 01801 - TestEquipmentDepot.com

**Depend On Us** 

## CONTENTS

COPPER Installation	
VDV II	6
POE PRO	7
SIGNALTEK CT	8
COPPER AND FIBER Installation	
LANTEK IV	9
FIBERTEK IV	10
TREND ANYWARE CLOUD / DESKTOP	11
LANTEK III	13
FIBERTEK III	14
SAPPHIRE CARE PLAN	15
TEST4LESS	15
OTDR II	16
FIBER Installation	
FIBERMASTER	17
VFF5	18
NETWORK Troubleshooter	
NAVITEK NT	19
SIGNALTEK NT	20
LANXPLORER PRO	21
<b>CCTV</b> Tester	
SECURITEST IP	22
INDUSTRIAL ETHERNET Tester	
NAVITEK IE	23
ENTERPRISE AND WAN Tester	
UNIPRO	24

#### **OUR TESTERS**

TREND NETWORKS specialises in user-friendly solutions which help technicians across the globe to install and test networks, data cable, Ethernet, CCTV installations, PROFINET, PoE and more.

A varied choice of innovative and intuitive handheld testers ensure that jobs are both productive and profitable, with Proof of Performance integral to design. Copper and fiber testers verify and certify data cable, network testers pinpoint and solve networking issues, and specialist tools make it simpler than ever to install and maintain Ethernet devices and cabling.

Whenever and wherever needed, expert support and leading technologies come together to help keep downtime to a minimum. The innovative AnyWARE Cloud platform assists users further, enabling better test data management and new options for real-time, remote support.

With greater connectivity, enhanced collaboration and a growing range of testers, TREND NETWORKS is dedicated to meeting the changing needs of the industry both today, and in the future.



VISION Depend On Us

## SELECTION GUIDE



	DATA CABLE TESTING			
	VDV II	PoE Pro	SignalTEK CT	LanTEK IV
Cable verification				
Advanced copper wiremap	0	0	0	0
Length to open	Plus & Pro	0	0	0
TDR length to short/fault	Pro	0	0	0
Fiber verification				Optional
PoE Verification	Pro	0		
PoE Max Power Available (up to 90W)		0		
Tone generator (audible trace)	0	0	0	0
Flash hub/switch link LED (visual trace)	Plus/Pro			
Performance testing to standards				
IEEE cable transmission performance test			0	
IEEE performance test through live networks				
TIA-568/ISO 11801 copper cable certification				0
Fiber optic certification (Tier 1)				Optional
Fiber option OTDR certification (Tier 2)				
Network, CCTV and Industrial Testing				
Network connectivity troubleshooter				
VoIP, QoS, Wi-FI and WAP network troubleshooter				
Digital and analog CCTV testing				
PROFINET Cable and Network Testing				
Reporting				
PDF Reporting			0	0
TREND AnyWARE Cloud / Desktop				0
TREND AnyWARE Mobile App			0	

## SELECTION GUIDE











	NETWORK TESTING		CCTV	PROFINET	
OTDR II	NaviTEK NT	SignalTEK NT	LanXPLORER Pro	SecuriTEST IP	NaviTEK IE
	0	0	0	0	0
	0	0	0	0	0
	0	0	0	0	0
0	Pro	0	0		0
	Plus & Pro	0	0	0	0
	0	0	0	0	0
	0	0	0		0
		0			
		0			
0					
	0	0	0	0	0
			0		
				0	
					0
0	Plus & Pro	0	0	0	0
	Plus & Pro	0	0		0

# VDV II

The VDV II Series are easy to use cable testers that check the integrity of copper cables commonly found in domestic, commercial or industrial voice, data or video installations.

Employing state-of-the-art technology, VDV II offers functionality not previously available in a wiremapper.



#### **FEATURES**

- RJ45, RJ11/RJ12 and coax ports
- TDR technology pinpoints cable faults eliminating unnecessary guess work
- Ability to identify and trace cables with a compatible inductive tone probe (optional)
- PoE service detection with voltage information
- Support for all common LAN cables (TIA 568A/B wiring schemes)

Description is for VDV II Pro model.

- Large backlit screen provides instantaneous, easy to read test results
- Identifies analogue (PBX) and digital (ISDN) telephone services
- Displays network rate and duplex information
- Port blink to visually trace cable
- Voltage protection cable testing disabled if >2V is detected

Part No.	Kit content
R158000	<b>VDV II</b> – Voice, Data and Video Cable Verifier. Includes 1 x tester, 1 x dual port remote unit, 1 x coax remote unit, 1 x alkaline battery, 1 x multi-language user guide
R158002	VDV II Plus - Voice, Data and Video Cable Verifier
R158003	VDV II Pro - Voice, Data and Video Cable Verifier
Additional content for VDV II Plus and Pro: Includes 1 x tester, 1 x dual	

port remote unit, 1 x coax remote unit, 1 x alkaline battery, 1 x multilanguage user guide, 2 x RJ45 to alligator clip cable 390mm, 2 x screened RJ45 to RJ45 cable 150mm, 2 x RJ12 to RJ12 cable 100mm, 1 x F-type plug to F-type plug cable 230mm, 1 x F-81 barrel splice, 1 x BNC female to F-type male adapter, 1 x BNC female to F-type female adapter, 1 x RCA female to F-type male adapter, 1 x RCA female to F-type female adapter, 1 x wallet wiring card, 1 x carry case

Part No.	Recommended Accessories
158050	Kit of 12 x RJ45 remote units (#1 - #12)
158051	Kit of 24 x RJ45 identifiers (#1 - #24)
158053	Kit of 12 x coax remote units (#1 - #12)

## **PoE** Pro

Data Cable and Power over Ethernet Verifier

Eliminate guesswork from PoE installations

The new PoE Proeliminates guesswork when installing, maintaining and troubleshooting networks where PoE is deployed.

Previously technicians had to understand all the various standards, device power outputs and cable lengths to be sure a device will operate successfully.

The PoE Pro identifies the Class of the PoE source and power available to a PoE device regardless of cable length, cable quality or other factors. Provides a clear pass/fail result to IEEE 802.3af/at/bt standards.



- Multimedia Support: RJ-45, RJ-11/RJ-12 and coax ports for verification of low voltage copper cables
- TDR Length Testing and Troubleshooting: Pinpoints cable faults eliminating unnecessary guesswork
- Tone Generator: Ability to identify and trace cables with a compatible inductive tone probe (optional)
- **PoE Detection:** Identify the IEEE standard, Class, Type, max Power (W) and Voltage (V) available
- Large Backlit Screen:
   Instantaneous, easy to read
   test results

- Media Service Detection: Identifies analog (PBX) and digital (ISDN)telephone services
- Extended Power Test: Some switches / injectors may provide power exceeding its IEEE Class rating. Hold button for 3 seconds to measure maximum available power up to 90 watts
- Ethernet Detection: Displays network rate and duplex information
- Voltage Protection: Cable testing disabled if >2V detected

Part No	. Kit Contents		
R158004	PoE Pro – Data Cable and Power over Ethernet Verifier. Includes 1 x tester, 1 x dual port remote unit, 1 x coax remote unit, 1 x alkaline battery, 1 x multi-language user guide, 2 x RJ45 to alligator clip cable 390mm, 2 x screened RJ45 to RJ45 cable 150mm, 2 x RJ12 to RJ12 cable 100mm, 1 x F-type plug to F-type plug cable 230mm, 1 x F-81 barrel splice, 1 x BNC female to F-type male adaptor, 1 x BNC female to F-type female adaptor, 1 x RCA female to F-type male adaptor, 1 x RCA female to F-type female adaptor, 1 x wallet wiring card, 1 x carry case.		
Part No.	Recommended Accessories		
158050	Kit of 12 x RJ45 remote units (#1 - #12)		
158051	Kit of 24 x RJ45 identifiers (#1 - #24)		
158053	Kit of 12 x coax remote units (#1 - #12)		

# SignalTEK CT

If you install or maintain data cabling, SignalTEK CT allows you to generate PDF test reports that prove installed links run at Gigabit Ethernet transmission rates.

SignalTEK CT also gives network owners the assurance that installed cabling will support bandwidth hungry services like VoIP, IP CCTV and video streaming following moves, adds and changes.





- Fast Autotest provides
   proof of network
   performance in seconds
- Support for shielded and unshielded twisted pair cable including Cat 5e, Cat 6, Cat 6A and Cat 7
- Stores up to 5000 tests to accommodate even the largest jobs
- Identify and trace cables with a compatible amplifier probe (62-164)

- Automatic generation of PDF test reports makes documentation effortless
- Tests against IEEE802.3ab to assure cable performance against a recognised international standard
- No requirement for annual calibration reducing cost of ownership
- Field replaceable RJ45 contacts eliminate downtime from worn or damaged connectors

Part No.	Kit Contents
R156006	<b>SignalTEK CT</b> – Data Cable Transmission Tester. Includes 1 x display with touchscreen, 1 x remote, 2 x NiMH batteries, 2 x patch cables - 30cm, Cat 5e STP, 2 x power supply with EU/UK/US adapters, 1 x USB Wi-Fi adapter, 1 x user manual, 1 x carry case
Part No.	Recommended Accessories
150058	1 x RJ45 insert extraction tool, 10 x lifejack RJ45 inserts
151052	1 x Alkaline battery module

## LanTEK IV

The Future of Cable Certification

The LanTEK IV is a new Cable Certification System that brings a new standard to the industry, making the job faster, easier and more profitable.

#### **FEATURES**

- **7 Second Test Time** Test and save a Cat6A test within 7 seconds.
- VisiLINQ<sup>™</sup> increases productivity VisiLINQ<sup>™</sup> permanent link adapters present a new and unique way to test, everything you need to operate the certifier and verify the results in the palm of your hand.
- **Future proof** Certify links to Cat8.1 and Cat8.2 including TCL and resistance unbalance measurements. The LanTEK IV will test up to 3000MHz providing room for future ratified ISO/TIA test standards.
- No downtime or unexpected bills The Sapphire Care Plan is designed to minimize down time, reduce the cost of ownership and protect against unforeseen repair bills.

### 

Work smarter not harder with the unique VisiLINQ Permanent Link Adapter. Connect, activate and see the result.









Part No	Kit Contents
R163000	LanTEK IV-500MHz Cable Certifier. TIA Category 6A/ ISO Class EA. LanTEK IV Display/Remote handsets, Li-ion Battery (2), Univ. Power Adapter (2), USB Cable, Hang. Strap (2), Quick Ref. Guide, Carry Case, CAT6A RJ45 VisiLINQ Permanent Link Adapters (2)
R163001	LanTEK IV-3000MHz Cable Certifier. TIA Category 8/ ISO Class I/II. LanTEK IV Display/Remote handsets, Li-ion Battery (2), Univ. Power Adapter (2), USB Cable, Hang. Strap (2), Quick Ref. Guide, Carry Case, CAT8 RJ45 VisiLINQ Permanent Link Adapters (2)
TRADE163000	Trade-In of any Cat5e (or higher) cable certifier to a LanTEK IV 500MHz
TRADE163001	Trade-In of any Cat5e (or higher) cable certifier to a LanTEK IV 3000MHz

LanTEK IV Optional Adapters and Accessories

Part No	Descriptions
R163052	LT IV - CAT6A/6/5e RJ45 Channel Adapter (Single)
R163053	LT IV - Cat8.1/6A/6/5e RJ45 Channel Adapter (Single)
R163054	LT IV - Cat8.2 TERA Universal Adapter (Single)
R163056	LT IV - Cat8.2 GG45 Universal Adapter (Single)
R163055	LT IV - Cat8.2 EC7 Universal Adapter (Single)

#### Sapphire Care Plans for LanTEK III/IV and FiberTEK III/IV

Part No	Descriptions
SCP1YRN	Sapphire Care Plan - Copper - 1 Year (incl. 10% discount) *
SCP2YRN	Sapphire Care Plan - Copper - 2 Years (incl. 10% discount) *
SCP3YRN	Sapphire Care Plan - Copper - 3 Years (incl. 10% discount) *
SCP1YR	Sapphire Care Plan - Copper - 1 Year
SCP2YR	Sapphire Care Plan - Copper - 2 Years
SCP3YR	Sapphire Care Plan - Copper - 3 Years
SCP1YF	Sapphire Care Plan - Fiber (Per Pair) - 1 Year
SCP2YF	Sapphire Care Plan - Fiber (Per Pair) - 2 Years
SCP3YF	Sapphire Care Plan - Fiber (Per Pair) - 3 Years

**Included:** Free repairs, free annual calibration, free loan tester during repairs and calibration, free shipping, free firmware updates, free technical support, free replaceable wear parts. Terms and conditions apply.

 $^{\ast}$  when purchased within 60 days of purchasing a new LanTEK IV.

## FiberTEK IV

FiberTEK IV adapters are used with LanTEK IV for fast and simple certification of high bandwidth single-mode and multimode fiber optic cabling including support for encircled flux testing.



R164008

#### **FEATURES**

- **Troubleshooting:** Red laser light source to visually pinpoint faults and locate fiber ports
- Receive LED indicator: Flashes red to warn of light from other sources, green when linked to FiberTEK IV
- Certification: Tier-1 certification of single-mode and multimode fiber optic cabling
- Encircled Flux compliance: Enables compliance to the new 2016 fiber standards IEC 14763-3 and ANSI/TIA- 526-14-C (optional accessory – see back page for details)

- Field calibration: Allows 1 and 3 jumper field calibration methods to ensure accuracy and compliance to ISO/IEC and ANSI/TIA standards
- Supports all common connector types: SC, FC, ST adapters included. LC adapters optional
- Simplified bi-directional measurements: Eliminates process of manually merging directional tests into one record







Part No	Kit Contents
R164008	FiberTEK IV-MM LED Kit. Two multimode FiberTEK IV modules, lockable semi-rigid carrying case, SC, FC, ST adapters for modules (2 ea.), SC-SC patch cords, 6x 9µm MMF) compliant to ISO/IEC 14763-3 standard, quick reference guide. Compatible with LanTEK IV.
R164009	FiberTEK IV-SM Laser Kit. Two single-mode FiberTEK IV modules, lockable semi-rigid carrying case, SC, FC, ST adapters for modules (2 ea.), SC-SC patch cords, 6x 50μm MMF) compliant to ISO/IEC 14763-3 standard, quick reference guide. Compatible with LanTEK IV.
R164010	FiberTEK IV-MM LED & SM Laser Kit. Two multimode FiberTEK IV modules, two single-mode FiberTEK IV modules, lockable semi-rigid carrying case, SC, FC, ST adapters for modules (2 ea.), SC-SC patch cords, 6 x 9µm, 6 x 50µm compliant to ISO/IEC 14763-3 standard, quick reference guide. Compatible with LanTEK IV.

FiberTEK IV Optional Accessories

Part No	Descriptions
R164050	FT III/IV - Encircled Flux 50/125um Cable SC - SC
R164051	FT III/IV - Encircled Flux 50/125um Cable SC - LC
R164064	FTIII/IV - LC Receiver Adapter (Single)
R164061	FTIII/IV - 50/125um LC Adaptor kit with pouch
R164062	FTIII/IV - 9/125um LC Adaptor kit with pouch

### TEST MANAGEMENT SOFTWARE



The new TREND AnyWARE Cloud management system allows real time collaboration between Project Managers and Field Technicians. There is no need for Field Technicians to setup the LanTEK IV, Project Managers pre-configure the jobs and tests in the TREND AnyWARE Cloud, eliminating potential mistakes and compressing the time taken to prepare reports for customers and warranties.



#### **Cloud software**

- Operates anywhere with a web browser TREND AnyWARE Cloud operates on a PC, Mac and tablet devices (Android and iOS)
- Free storage No need for separate servers or backup systems.
- Easy to find project files Attach all project files including cable layout drawings, videos, and photos into the TREND AnyWARE Cloud. Everything you need in one place.
- Share reports easier Use TREND AnyWARE Cloud to share links to the test reports eliminating the need to manually email large attachments.


• Reduce training time with WalkMe – TREND AnyWARE Cloud is embedded with the WalkMe digital adoption platform providing proactive, step-by-step guidance on all key tasks.

#### **Fleet management**

• Easily manage the certifier fleet – Fleet manager allows you to see who has the certifier, when the software was last updated, calibration due date and when the results were last synced. Allowing you to manage tester downtime and ensuring results are transferred back to the office and not lost or deleted.

=	TREND NETWORKS							• •
	Jobs							0
	Building-1 Library City University	04/06/2019	380	]	380		PAILED	VIEW
	2 B B B A		-					
	Building-2 Humanities City University	04/06/2019	160	]	PASSED 160	]	FAILED 0	VIEW
	2 8 8 8 G							
	Building-3 Science City University	04/06/2019	225	1	225	1	FAILED	VIEW
	/ B   B   0		-					
	Building-4 Engineering City University	04/06/2019	1 <sup>TOTAL</sup>		144	1	FAILED	VIEW
	/ B B B A							
	CITY HOSPITAL BUILDI NHS	04/06/2019	100	1	100	1	FAILED	VIEW
	/ B   B   A							
	CITY HOSPITAL BUILDI NHS	04/06/2019	146	]	146	]	FAILED	VIEW
	/ N H N O		·					

TREND AnyWARE Cloud Jobs screen

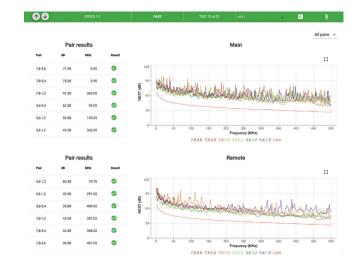

TREND AnyWARE Cloud Test Result screen

### Real time collaboration between Project Managers and Field Technicians

#### **Pre-configuration**

- Reduce setup errors Project Managers pre-configure all project information in the TREND AnyWARE Cloud and Field Technicians simply download the project to the LanTEK IV eliminating any mistakes from manual data entry.
- Create the most complex test ids Easily create simple or sophisticated naming conventions required by the client.

#### Troubleshooting

• Advanced filtering – filter tests on any field to reduce the time spent searching.

#### Support

- **Reduce training time** The TREND AnyWARE Cloud comes with proactive, step-by-step guidance for all the key features.
- Team Viewer Live Support Using the TREND AnyWARE Cloud users can connect to a LanTEK IV remotely to troubleshoot failed links, minimizing troubleshooting time, increasing collaboration and reducing call-backs.

#### **Professional reports**

- **Customer profiles** Create a profile for each of the customers with their company logo, address and contact details. This information is automatically pulled through to the reports, saving time.
- 2 Report Formats
  - **Single line report** This is a summary report showing multiple tests per page.
  - Brief report This is a comprehensive report with all the measurement results with one page per test.

TOTAL Network Integrators	TREND Any WARE® Clo Certification Repo		$\checkmark$
Test ID Link-048 Main Mall, Floor 1, Room 201 Date/Time: 01/01/2019 15:30:05 Project Name: Westfield London Customer Name: Westfield Partners, Ltd. Operator: Joe Walsh	Test Standard: ANSI/TIA-568.2-D Test Limit: Cat 6A Permanent Link Cabie BrandModet Generic/Category 6A Cabie TypeShold: UUTP Cabie NVP9: 68% Main Connector: Generic 6A Remote Connector: Generic 6A	Test Main Handset S/N 19060001 S/N 1.000-19011 Calibration Due 01/01/2020 Adspter 6A-PL, #1901100	er Model: LanTEK IV Remote Handsel S/N 19060002 S/W 1.000-1901 Calibration Due 01/01/2020 Adapter 6A-PL, #1901100
Prop Delay 36 560 ns 300 Delay Skew 36-78 50 ns 25	0 m - Margin Freq. NEXT 15.dB 3.8MHz 3 NEXT 15.dB 7.5MHz PSNEXT 4.0 dB 7.5MHz RL 11.5dB 275.0MHz IL 15.dB 8.0MHz TCL 25.0 dB 300.0 MHz	Pair Side	
NEXT (dB)	NEXT (dB)	ACR-F (dB)	ACR-F (dB)
Worst         Highest           NEXT         J.5 dB         40.0 dB           Pair         36.45         12.45           Limit         66.0 dB         30.0 dB           Feed.         3.8 MHz.         50.0 MHz           PSNETV         5.0 dB         15.0 dB           Limit         66.0 dB         30.0 MHz           Freq.         3.8 MHz.         50.0 dH           Freq.         3.8 MHz         50.0 MHz	Worst         Highest           Margin         Value           NEXT /         5.0 dB         35.0 dB           Pair         35.0 dB         30.0 dB           Limit         35.0 dB         30.0 dB           Freq.         3.8 MHz         50.0 MHz           PSNEXT /         4.0 dB         15.0 dB           Pair         45.0 dB         30.0 dB           Freq.         7.5 MHz         500.0 MHz	Worst         Highest           Margin         Value           ACR-F         5.0 dB         15.0 dB           Pair         36.45         36.45           Limit         35.0 dB         30.0 dB           Freq.         3.8 MHz 50.0 MHz           Pair         36         36           Jimit         35.0 dB         15.0 dB           Piar         36         36           Jimit         36.0 dB         30.0 dB           Freq.         3.8 MHz 500.0 MHz	Worst         Highest           Margin Value         ACR-F ✓         50.06         15.0.08           Pair         38.45         36.45         Limit         35.0.08         90.0.01           Frag.         3.8.MHz 200.0 MHz         PSACR-F ✓         50.06         15.0.08         PAir         90.0         Frag.         50.07         Frag.         50.07         Frag.         50.08         15.0.08         Frag.         50.08         15.0.08         Frag.         50.08         0.00         Frag.         50.08         0.00         Frag.         3.8.042         50.00         MHz         50.00         MHz         50.08         50
RL (dB)	RL (dB)	ACR-N (dB)	ACR-N (dB)
Urest Highest	Wordt Highest Margin Value	Worst Highest Margin Value	Worst Highest Margin Value
RL         Cold dB         190.0 B           Pair         78         12           Limit         20.1 dB         20.0 dB           Freq.         2.5 MHz         5.0 MHz	RL ✓ 0.6 dB 19.0 dB Pair 78 12 Limit 20.1 dB 20.0 dB Freq. 2.5 MHz 5.0 MHz	ACR-N         50 dB         150 dB           Pair         36-45         36-45           Limit         36.0 dB         30.0 dB           Erran,         38.0 MHz         500.0 MHz           PSACR-F         50.0 dB         15.0 dB           Pair         45         45           Limit         35.0 dB         30.0 dB           Pair         45         45           Limit         35.0 dB         30.0 dHz           Freq.         3.8 MHz         500.0 MHz	ACP-N         SO.dB         15.0 dB           Pair         36.45         38.45           Limit         36.0 dB         38.0 dB           Erreq         3.8 MHz         50.0 MHz           PSACE-F         5.0 dB         15.0 dB           Pair         45         45           Limit         35.0 dB         30.0 dB           Pair         46         45           Limit         35.0 dB         30.0 dB           Freq.         3.8 MHz         500.0 MHz
IL (dB)	Worst         Highest           Margin         Value           IL         15 GB 42.0 dB           Pair         12           Limit         5.0 dB           Freq.         8.0 MHz	NEXT Locator: Main-to-Remote	G the state and state are state and state are state and state are state and state are
Applications Supported: 10Base-T 100Base-TX 1000Base-T 2.5GBase-T 5GBase-T ATM-155 ISI	1000Base-T4 10GBase-T DN Analog/POTS		Report Generated: Date/Time Page n of nn TREND NETWORKS

Professional PDF Report generated by the TREND AnyWARE Cloud

## LanTEK III

Certifier for Copper and Fiber Cabling


The LanTEK III is an easy to use cable certifier that meets existing TIA and ISO/IEC performance requirements for testing up to Cat. 6A/500MHz.



#### **FEATURES**

- New troubleshooting features that save time and money: Locate hidden connections, splices and cable faults using Time Domain Return Loss (TDRL) and Time Domain Crosstalk (TDX)
- Share test data: Provides mobile device connectivity using the USB Wi-Fi adapter and free TREND AnyWARE app
- Long life battery: 18 hours continuous use in the field
- New permanent link adapter saves money: Reduce down time and lower maintenance costs with field replaceable RJ45 contacts
- LanTEK III Talk Set: Talk to

Download the FREE App today



- Tone generator on both test units: Ability to identify and trace cables with a compatible amplifier probe (62-164)
- Autotest on both test units: Comprehensive test results within seconds. Allows one person testing
- Rugged design: Rubberised housing, protected screen and protected measurement port
- Independently verified: Accuracy verified by Intertek

Anv**WARE**`

 Part No
 Kit Contents

 R161001
 LanTEK III-500MHz - (test adapters to be ordered separately) Includes 500 MHz cable certifier. TIA/EIA category 6A/ISO Class E<sub>A</sub>.

 R161003
 LanTEK III-500MHz - (including PL adapters) Includes 500 MHz Cable Certifier. TIA/EIA Category 6A/ISO Class E<sub>A</sub>.

LanTEK III display/remote handsets, Li-ion battery (2), universal power adapter (2), USB cable, headset (2), hanging strap (2), quick reference guide, carry case, USB Wi-Fi adapter (1). For R161003/1004: permanent link adapter - R161051 (2)

#### LanTEK III Optional Adapters and Accessories

Part No	Descriptions
R161051	LT III - CAT6A RJ45 permanent link adapter (single)
R161052	LT III - CAT5e/6 RJ45 channel adapter (single)
R161053	LT III - CAT6A RJ45 channel adapter (single)
R161050	LT III - CAT6A PLA replacement tips (pair)

#### Sapphire Care Plans for LanTEK III/IV and FiberTEK III/IV

Part No	Descriptions		
SCP1YRN	Sapphire Care Plan - Copper - 1 Year (incl. 10% discount) *		
SCP2YRN	Sapphire Care Plan - Copper - 2 Years (incl. 10% discount) *		
SCP3YRN	Sapphire Care Plan - Copper - 3 Years (incl. 10% discount) *		
SCP1YR	Sapphire Care Plan - Copper - 1 Year		
SCP2YR	Sapphire Care Plan - Copper - 2 Years		
SCP3YR	Sapphire Care Plan - Copper - 3 Years		
SCP1YF	Sapphire Care Plan - Fiber (Per Pair) - 1 Year		
SCP2YF	Sapphire Care Plan - Fiber (Per Pair) - 2 Years		
SCP3YF	Sapphire Care Plan - Fiber (Per Pair) - 3 Years		

**Included:** Free repairs, free annual calibration, free loan tester during repairs and calibration, free shipping, free firmware updates, free technical support, free replaceable wear parts. Terms and conditions apply.

\* when purchased within 60 days of purchasing a new LanTEK III.

## FiberTEK III

FiberTEK III adapters are used with LanTEK III for fast and simple certification of high bandwidth single-mode and multimode fiber optic cabling including support for encircled flux testing.





- **Certification:** Tier 1 certification of single-mode and multimode fiber optic cabling
- **Troubleshooting:** Red laser light source to visually pinpoint faults and locate fiber ports
- Protected test ports: Attached covers protect ports, minimise contamination and will not be misplaced
- Encircled Flux compliance: Enables compliance to the new fiber standards IEC 14763-3 and ANSI/TIA 526-14-C

- Field calibration: Allows 1 and 3 jumper field calibration methods to ensure accuracy and compliance to IEC and ANSI/TIA standards
- Supports all common connector types: SC, FC, ST adapters included. LC adapters optional
- Simplified bi-directional measurements: Eliminates process of manually merging directional tests into one record
- Standards: Complies with all international standards including TIA and ISO/IEC

Part No.	Kit Contents
R164005	<b>FiberTEK III-MM LED Kit</b> - Includes two multimode FiberTEK III modules, lockable semi-rigid carrying case, SC, FC, ST adapters for modules (2 ea.), SC-SC patch cords, 6x 50µm MMF compliant to ISO/IEC 14763-3 standard, quick reference guide.
R164006	<b>FiberTEK III-SM Laser Kit</b> – Includes two single-mode FiberTEK III modules, lockable semi-rigid carrying case, SC, FC, ST adapters for modules (2 ea.), SC-SC patch cords, 6x 9µm SMF compliant to ISO/IEC 14763-3 standard, quick reference guide.
R164007	<b>FiberTEK III-MM LED &amp; SM Laser Kit</b> – Includes two multimode FiberTEK III modules, two single-mode FiberTEK III modules, lockable semi-rigid carrying case, SC, FC, ST adapters for modules (2 ea.), SC-SC patch cords, 6 x 9µm SMF, 6 x 50µm MMF compliant to ISO/IEC 14763-3 standard, quick reference guide.
Part No.	Recommended Accessories
R164060	FT III - Set of SC, FC and ST screw-on adapters
R164050	FT III - Encircled Flux 50/125um cable SC - SC
R164051	FT III - Encircled Flux 50/125um cable SC - LC
R164061	FT III/IV - 50/125um LC Adaptor kit with pouch
R164062	FT III/IV - 9/125um LC Adaptor kit with pouch



### Complete protection for your LanTEK III/IV and FiberTEK III/IV

The Sapphire Care Plan is designed to help minimize down time, reduce the cost of ownership and protect against unforeseen repair bills.

Free Annual Calibration - Maintain Accuracy

Free Repairs - Protect Against Unforeseen Bills

Free Loan Unit During Repairs and Calibration - No Downtime

Free Online Training and Technical Support - Improve Efficiency

Free Shipping - Reduce Costs

#### Free Replaceable Wear Parts - Reduce Cost of Ownership

Every year choose from one of the following options.

- 4 x Permanent Link Adapter Tips (Pair)
- 4 x CAT6A Reference Patch Cord (Single)
- 2 x CAT6A Channel Adapter (Single)
- 1 x LanTEK III/IV Battery (Single)



## Unique "Pay As You Test" (PAYT) options improves cash flow



If three or more certifiers are required our 'Pay As You Test' options can turn your certifier fleet from what is traditionally a capital cost into an operating expense, optimizing cash flow and allowing you to spread the cost over time. This offers the flexibility to make purchases within your budget and makes it easier to assign costs to projects. Simple payment options start from no money upfront to as little as £2,750 per certifier.

#### Purchase test credits as and when you need to with these easy steps.



Press "Add Tests" on the certifier to retrieve your unique code



Call Customer Services with this code to purchase 5,000 tests



They'll provide a new activation code for you to enter and the new balance will be shown



Don't worry if you run out of test credits, the certifier will still let you test due to its overdraft facility

## OTDR II

Tier-2 Optical Time Domain Reflectometer for Multimode and Single-mode Fiber Cabling

#### The handheld OTDR... reinvented

The OTDR II is optimised for multimode and single-mode fiber testing, this fully featured, easy to use, dedicated OTDR with tablet-inspired design is the perfect tool for troubleshooting, certification and everyday field testing in fiber optic networks.



- Includes the intelligent Optical Link Mapper (iOLM), which turns complicated graphs into an easy to read diagram displaying all events along the link with pass/fail status for each event
- Handy, lightweight, powerful, tablet-inspired design

- Wi-Fi for data download
- Event deadzone : 0.5m MM / 0.7m SM
- 7-inch, outdoor-enhanced touchscreen
- 12-hour battery life
- Dynamic range of up to 36 dB in single-mode and 29 dB in multimode
- Professional PDF reporting

Part No.	Kit Contents		
R230000	<b>OTDR II</b> - Quad OTDR with IOLM, ICERT (certification to international standards), SC adapters (multimode: SC/UPC, single-mode: SC/APC), visual fault locator, power supply, battery and carrying case		
Part no.	Recommended Accessories		
R230002	Fiber Inspection Probe (100x, 200x and 400x magnification), universal 2.5mm adapter tips and soft pouch		
R230050	<b>OTDR II -</b> Visualt Fault Locator and Power Meter Option for MM and SM, SC adapters		
R230051	Fastreporter 2 PC software		
R230057	LC Adapter for OTDR II		
SOFT2300TDR	OTDR II trace option		

## FiberMASTER

Measure absolute power and calculate the loss of fiber optic links at several wavelengths

The TREND FiberMASTER fiber optic testing kit allows the user to measure absolute power and calculate the loss of fiber optic links at several wavelengths. Absolute power measurements are helpful when trouble shooting equipment that may not be operating properly. The dB calibration feature allows the operator to set a reference level to the light source and directly read the loss of fiber optic links without needing to manually calculate the values.



- Troubleshoot fiber optic network components with optical power meter
- Display power loss in dB using reference function
- Measures fiber optic power in milliwatts (mW) and decibel-milliwatts (dBm) for troubleshooting
- Unique form factor for easy storage of the light source allowing full operation of both light source and power meter

Part No.	Kit Contents		
33-928	<b>FiberMASTER</b> MM/SM power meter with 850nm light source only (incl. soft case, manual and cable kit)		
33-931	<b>FiberMASTER</b> MM/SM fiber optic test kit (quad light source 850/1300/1310/1550)		
Part no.	Recommended Accessories		
135051	Male FC (2.5mm) to Female LC (1.25mm) connector allows LC connections to interface with FC devices. Contents: One adapter. Order two pieces when using with FiberMASTER or other optical loss test sets.		

## VFF5

The Visual Fault Finder is a visible laser light source used to check continuity, locate breaks, poor mechanical splices and damaged connectors in fiber optic cabling.

Used to verify continuity, test and find breaks in fiber links, locate pinched fiber strands in termination cabinets, or anywhere fiber optic cables are terminated and subject to mechanical damage.

The VFF5 is also an excellent aide to technicians terminating mechanical splices or pre-polished connectors where leaking light is an indicator of a poor fiber cleave or other misalignment.



#### **FEATURES**

- A hand-held, batterypowered tool, the VFF5 projects a highly visible red light into a fiber optic cable. The VFF5 is used to check continuity of cabling between termination points and to locate bends or breaks in fibers at splicing and termination points
- Useful over a distance of approximately 5km (3.1mi) into multimode fiber and single-mode fiber. Use it as a stand-alone first-line basic troubleshooting tool, or in conjunction with an OTDR to pinpoint faults. Any breaks will be seen as a conspicuously glowing or blinking red light area (in

3mm or smaller cables)

- Equipped with a highpower, day light visible 650nm laser diode which operates either in continuous or flashing mode. The design prevents battery drain due to accidental activation of the tool while inside a tool pouch
- Two AA batteries provide over 30 hours of operation in continuous mode and 80 hours of operation in flashing mode.
- Packaged in a pocket-sized, rugged metal housing and is fitted with 2.5 mm universal connector that accepts ST, SC and FC optical connectors

Part No.	Kit Contents
VFF5	<b>VFF5</b> - VISUAL FAULT LOCATOR Fiber optic cable continuity tester, fault detector (VFL)
Part No.	Recommended Accessories
135051	Male FC (2.5mm) to Female LC (1.25mm) connector allows LC connections to interface with FC devices. Contents: One adapter. Order two pieces when using with FiberMASTER or other optical loss test sets.

### **NETWORK** Troubleshooter

## NaviTEK NT

Copper and Fiber Network Troubleshooter

The NaviTEK NT is a network tester for troubleshooting and maintenance of active and passive copper and fiber networks. Incorporating an improved graphical interface NaviTEK NT allows network technicians to pinpoint and solve network connectivity issues faster than ever before.

Subsequently, tests can be saved as PDF reports and shared with colleagues and clients using the free TREND AnyWARE app.





#### **FEATURES**

- Port & network summary info: Press the Autotest button to display summary information and allow for detailed inspection of network parameters
- VLAN detection & operation: Automatic detection of VLAN ID's allows the user to configure NaviTEK NT for operation on a VLAN
- Ethernet utilisation: Real time display of broadcast network traffic shown as a percentage of port speed for the previous 60 minutes

Description is for NaviTEK NT Pro model.

- CDP/LLDP/EDP port information: Show port information using Cisco Discovery Protocol (CDP), Link Layer Discovery Protocol (LLDP) and Extreme Discovery Protocol (EDP)
- Netscan: Display list of IP and MAC addresses of every device connected to the network
- Network Probe: View network illustration to verify test results of each network component

Part No.	Kit Contents		
R153001	NaviTEK NT - Network Troubleshooter. 1 x NaviTEK NT test unit, 1 x Remote unit No. 1, 4 x AA dry cell batteries (non-rechargeable), 2 x Patch cables - 30cm, Cat. 5e STP, 1 x Quick reference guide, 1 x Carry case		
R151005	NaviTEK NT Plus- Network Troubleshooter. 1 x NaviTEK NT Plus test unit with touchscreen, 1 x Remote unit No. 1, *		
R151006	<b>NaviTEK NT Pro</b> – Network Troubleshooter. 1 x NaviTEK NT Pro test unit with touchscreen, 1 x Remote unit No. 1, *		
adapters, 2 x	*Additional content: 1 x Rechargeable Power Module, 1 x PSU EU/UK/US adapters, 2 x Patch cables - 30cm, Cat. 5e STP, 1 x USB Wi-Fi adapter, 1 x Quick reference guide, 1 x Carry case		
Part No.	Description		
MGKSX1	1 x 850nm SX MM SFP + fiber patch cord accessories kit		
MGKLX2	1 x 1310nm LX SM SFP + fiber patch cord accessories kit		
MGKZX3	1 x 1550nm ZX SM SFP + fiber patch cord accessories kit		

150058 RJ-45 replacement kit - Pack of 10 replacement inserts with extraction tool

## **NETWORK** Troubleshooter

# SignalTEK NT

If you install, maintain or troubleshoot data cabling and Ethernet networks, SignalTEK NT allows you to prove the performance up to Gigabit Ethernet transmission rates.

By simulating actual network traffic users are able to test and document network and data cable performance to Gigabit Ethernet standards.

Use the free TREND AnyWARE app to view and send data cable/network test reports to colleagues and clients anywhere.







- Network traffic performance test on copper and fiber to IEEE802.3ab standard
- Wiremap test for open, shorts, miswires and split pairs to TIA-568 standard
- Gigabit link verification for copper and fiber cabling
- PoE/PoE+ verification that displays available voltage at device location
- Verify network configuration (device IP/ gateway address/subnet mask)
- Switch port identification via LLDP/CDP protocols
- Distance to fault using TDR technology (copper only)

- Ability to identify and trace cables with a compatible amplifier probe (62-164)
- Optical power indication (with compatible SFP modules)
- Stress test network before installing bandwidth hungry devices
- Port blink to visually trace cable from work area outlet to network switch
- Displays port ID of LLDP/ CDP enabled switches to eliminate manual cable tracing

Part No.	Kit Contents
R156005	<b>SignalTEK NT</b> - Network Transmission Tester. Includes 1 x display with touchscreen, 1 x remote, 2 x NiMH batteries, 2 x patch cables - 30cm, Cat 5e STP, 2 x power supply with EU/UK/US adapters, 1 x USB Wi-Fi adapter, 1 x quick reference guide, 1 x carry case
Part No.	Recommended Accessories
MGKSX1	1 x 850nm SX MM SFP + fiber patch cord accessories kit
MGKLX2	1 x 1310nm LX SM SFP + fiber patch cord accessories kit
MGKZX3	1 x 1550nm ZX SM SFP + fiber patch cord accessories kit
150058	RJ-45 replacement kit - Pack of 10 replacement inserts with extraction tool

### **NETWORK** Troubleshooter

## LanXPLORER Pro

Network Troubleshooter with Bandwidth Monitoring and Performance Diagnostics

LanXPLORER Pro is an In-Line tester for diagnosing problems in active and passive networks. Capabilities include troubleshooting for Ethernet connectivity and identifying faults in copper cables. Networks can be accessed through copper, fiber and Wi-Fi interfaces.



Download the FREE App today



- The unique In-Line feature allows you to monitor network traffic between two devices to diagnose low level Ethernet issues that cannot be detected by either a PC or a managed switch
- See your top 10 device downloaders and uploaders on the network to help troubleshooting
- Supports IPv4 and IPv6
- Touch screen for easy data entry
- Performs a scan of your the entire network including printers, servers and PCs. Then rescan and check any changes which is useful for IT audits and troubleshooting

- Provides a comprehensive analysis on layer 1 (physical cable), layer 2 (data), layer 3 (IP) as well as layer 4 and above
- Field replaceable RJ45 contacts eliminate downtime from worn or damaged connectors
- Monitoring VoIP calls and the Quality of Service (QoS) including Real Time Transport Protocol (RTP) and jitter
- Detection of PoE and PoE+ with voltage, current and power measurements to discover any power supply issues. In-Line mode allows you to measure the consumption of your PoE devices

Part No.	Kit Contents
R150001	LanXPLORER Pro - In-line Network Troubleshooter 1 x LanXPLORER Pro test unit, 1 x remote unit #1, 1 x 2.4/5GHz Wi-Fi antenna, 1 x TREND amplifier probe, 1 x RJ45 insert extraction tool plus 10 x RJ45 inserts, 1 x power module (rechargeable), 1 x mains PSU/charger, 2 x 30cm RJ45 cable, 1 x USB Wi-Fi adapter, 1 x quick reference guide (English), 1 x carrying case
Part No.	Description
MGKSX1	1 x 850nm SX MM SFP + fiber patch cord accessories kit
MGKLX2	1 x 1310nm LX SM SFP + fiber patch cord accessories kit
MGKZX3	1 x 1550nm ZX SM SFP + fiber patch cord accessories kit
150058	RJ-45 replacement kit - Pack of 10 replacement inserts with extraction tool

## **CCTV CAMERA** Tester

## SecuriTEST IP

CCTV Camera Tester for IP Digital / HD Coax / Analogue Systems

## Camera Configuration, Installation and Troubleshooting

SecuriTEST IP is an installation and troubleshooting tester for digital/IP, HD coax and analogue CCTV camera systems. With a single tester that can power, configure and document, SecuriTEST IP increases productivity from start to finish.

Supply power to cameras via PoE/PoE+ (Power over Ethernet) or standard 12V DC power using its internal Li-Ion battery, eliminating the need for external power adapters and injectors.

The QuickIP<sup>™</sup> feature allows installers who are new to IP camera systems to quickly and easily connect to cameras without being network experts.



- Connect to various cameras using RJ45, Wi-Fi or BNC ports
- Power the camera with 12V from the Li-Ion battery or PoE/PoE+
- Faster camera login using the unique QuickIP<sup>™</sup> function
- Comprehensive camera setup with aim, focus, PTZ, presets and network settings
- Provide proof of installation with PDF reports that show camera parameters and multiple video screen-shots
- Eliminate guess work with data cable and network troubleshooting tools

1	Part No.	Kit Contents
F	R171000	<b>SecuriTEST IP -</b> Digital/Analogue/HD Coax CCTV Tester. 1 x SecuriTEST IP Camera Tester, 1 x carry case, 2 x neck straps, 1 x PSU EU/UK/US/AU adapters, 1 x cable tracer/remote, 1 x 3m Cat. 5e UTP patch cable, 1 x 3m coax cable with two end BNC (m) connectors, 1 x 3m DC12V 3.5(f) to 2.5(f) power cable, 2 x RS485 female green plugs, 1 x 0.5m RS485 cable with female green plug and two clips, 1 x 0.5m audio male jack with other end two clips, 1 x quick reference guide, 1 x 8GB microSD card and reader with USB adapter
_		

l	Part No.	Accessories
	R171050	1 x Replacement Cable Tracer/Remote
	R171051	1 x Replacement accessory set for SecuriTEST IP. 1 x coax cable with two end BNC (m) connectors, $1 \times DC12V 3.5(f)$ to $2.5(f)$ power cable, $2 \times RS485$ female green plug
	R171052	1 x Replacement Battery

## **INDUSTRIAL ETHERNET** Tester

## NaviTEK IE

The NaviTEK IE is a tester for commissioning, preventative maintenance and troubleshooting of PROFINET Industrial Ethernet networks as well standard Ethernet IP networks.

Designed to simplify the process, the NaviTEK IE identifies network nodes and configuration without requiring a PC and speciality software. An easy to understand system health check pinpoints potential issues before they become network failures. Automatically discover cable, network or device configuration/faults with the touch of a button. To prove the network has been commissioned successfully, NaviTEK IE provides professional PDF reports that can be shared with colleagues and clients using the free TREND AnyWare<sup>™</sup> mobile app.





Part No Kit Contents



#### **FEATURES**

- Pinpoint cable faults on copper and fiber cabling
- Easily configure nodes to resolve connectivity issues
- Prevent network failures with the health check feature
- Locate hard to find devices using the device blink feature
- Find mis-configured

devices using the NetMAP comparison tool

- Find rogue devices using the 48 hour event log
- Create professional PDF
   reports for your clients
- Send reports anywhere using the free TREND AnyWARE app

Part NO.	Kit Contents
R151010	NaviTEK IE - Industrial Ethernet Tester 1 x NaviTEK IE test unit, 1 x Remote unit No. 1, 1 x Rechargeable Power Module, 1 x PSU EU/UK/US adapters, 2 x Patch cables - 30cm, Cat. 5e STP, 1 x USB Wi-Fi adapter, 1 x Quick reference guide, 1 x Carry case, 2 x PROFINET RJ45 (m) - M12 (f) D coded 1m adapter cable (R151058)
Darth	Description
Part No.	Description
R151058	2 x PROFINET RJ45 (m) - M12 (f) D coded 1m adapter cable
R151059	2 x PROFINET RJ45 (m) - M12 (f) X coded 1m adapter cable
R151060	1 x 100Base-Fx SFP housing Media Converter

### **ENTERPRISE AND WAN** Tester

# **UniPRO MGig1**

Designed for comprehensive turn-up testing, monitoring and troubleshooting of fixed line, mobile, microwave and wireless carrier Ethernet links. UniPRO MGig1 is suitable for use on any backhaul link at speeds of up to 1 Gb/s on both copper and fiber links.

UniPRO MGig1 allows enterprise users to monitor the actual bandwidth and performance compared to the agreed service levels from the service provider. It can also be used to stress test and monitor the performance of LAN backbone links.



1 x carry case, 1 x carry strap.

- Reduce configuration time with independent setup parameters (devices, services and tests)
- One touch to run multiple tests unattended
- The most cost-effective RFC2544/Y.1564 tester in the market
- SLA-Tick (Service Level Agreement)

- Bit Error Rate Test (BERT)
- Multi Service (Stream) test
- Multiple levels of VLAN (QinQ) and MPLS
- Comprehensive in-line
   network monitoring
- Simultaneous IPv4 and IPv6 support

Part No.	Kit Contents
R152001	<b>UniPRO MGig1 Solo -</b> Gigabit Ethernet transmission tester with single Copper Port
R152002	<b>UniPRO MGig1 Solo Plus -</b> Gigabit Ethernet Multistream Bidirectional transmission tester with single Copper and Optical Ports
R152003	<b>UniPRO MGig1 Solo Pro -</b> GbE Multistream Bidirectional transmission tester with single Copper and Optical Ports and Y.1564
R152008	<b>UniPRO MGig1 Duo</b> - Gigabit Ethernet transmission tester with dual Copper Ports.
R152009	<b>UniPRO MGig1 Duo Plus</b> - Gigabit Ethernet Multistream Bidirectional transmission tester with dual Copper and Optical Ports
R152010	<b>UniPRO MGig1 Duo Pro -</b> GbE Multistream Bidirectional transmission tester with dual Copper and Optical Ports and Y.1564
R154000	<b>UniPRO SEL1 -</b> Gigabit Ethernet Loop-back device with single Copper and Optical Ports.
	<b>content:</b> attery, 2 x patch cables - 30cm Cat5eSTP, 1 x PSU with ; adapters, 1 x CD manual, 1 x English quick reference guide,





TREND NETWORKS, LanTEK, FiberTEK, VisiLINQ and the TREND AnyWARE logos are trademarks or registered trademarks of TREND NETWORKS.

### CE

Specification subject to change without notice. E&OE © TREND NETWORKS 2020 Publication no.: 163804. Rev 2.