

850LM & 811LM

UNIVERSAL RECEIVER AND
REMOTE CONTROLS



Unparalleled Radio Range featuring Security+ 2.0™ Technology

The Universal Receiver and accompanying new remote controls are the latest security and convenience innovations from LiftMaster® for gated community residents and commercial building tenants. With this solution, property managers can support and manage multiple access points, such as the main gate, tenant and visitor doors, commercial doors, and even parking entrances, all with a single transmitter solution that offers superior range and security.

Provides double the range of standard transmitters

New LiftMaster® Security+ 2.0™ technology utilizes a new, innovative and exclusive narrow band multi-frequency radio, which virtually eliminates radio interference

- No more waiting at the gate adds safety, security, and convenience.
- Eliminates customer call backs due to poor range performance.



Universal Receiver 850LM

- Double the range means no more waiting for the gate or door to open
- Three channel receiver
- Compatible with 811LM and all MAX remote controls

DIP Remote Control 811LM

- Single button remote
- Encrypted for security
- Dual 12 position DIP programming offers up to 4,096 codes
- Narrow band transmission on 3 simultaneous frequencies (310, 315, 390 MHz)

LiftMaster®

850LM & 811LM

UNIVERSAL RECEIVER AND REMOTE CONTROLS

Standard Features

- Provides convenient access to gated communities, industrial facilities, and commercial sites all with a single transmitter solution
- Multiple remote control options available to provide secure access from the safety and convenience of your vehicle
- Compact design to fit into most Gate and Commercial Door Operators
- Receiver available in convenient weather resistant version*

*Coming soon

Enhanced Features

- Industry leading radio range means no more waiting for the gate or door to open. This is provided through the innovative and exclusive narrow band transmission sent on three simultaneous frequencies.
- Added security and peace of mind through LiftMaster® Security+ 2.0™ Rolling Code Encrypted transmission.
- Three channels providing expanded remote control capacity
 - Channel 1 – 50 remotes
 - Channel 2 – 20 remotes
 - Channel 3 – 20 remotes

Ordering Guide

| Description | Model Number |
|--|--------------|
| Universal Receiver | 850LM |
| Universal Receiver – Weather resistant | 860LM |
| 1 button narrow band encrypted DIP Remote Control* | 811LM |
| 3 button narrow band encrypted DIP Remote Control* | 813LM |
| 3 button Mini Remote Control, Security+ 2.0™** | 890MAX |
| 3 button visor Remote Control, Security+ 2.0™** | 893MAX |
| 3 button Premium Remote Control, Security+ 2.0™** | 895MAX |
| Keyless Entry, Security+ 2.0™** | 877MAX |

*Not compatible with new LiftMaster® 8550 and 8360 garage door openers

**Compatible with gate operators and commercial receivers manufactured by LiftMaster since January 1993

Receiver Specifications

Power: 12-24VDC or 12-24VAC

Relay Outputs: Output channels – 1 FORM C and 2 FORM A relays


Narrow-band on 310 MHz, 315MHz, and 390 MHz. Security+ 2.0™ Rolling Code and Encrypted DIP

Environmental: Operational temperature from -35 to 65 degrees C; Storage temperature from -40 to 85 degrees C

Compliance: FCC Part 15

Warranty: 1 year

Dimensions

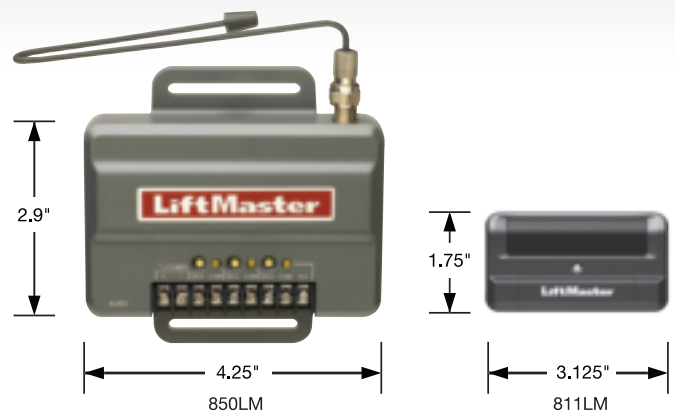

LiftMaster®

The Chamberlain Group, Inc. • 845 Larch Avenue • Elmhurst, IL 60126

www.liftmaster.com

ISO 9001 Certified Manufacturer



Follow us on Facebook, Twitter and YouTube!



©2011 LM CSW24V 11/11
The Chamberlain Group, Inc.
Printed in U.S.A.

LIMACCAURRC