

TOA REMOTE AUDIO CONTROL PANEL WITH AUDIO OUT

M-802RC-AM
M-802RCB-AM


DESCRIPTION

Designed for exclusive use with the M-8080D, the M-802RC Remote Audio Control Panel With Audio Out having a volume/routing control knob, in addition to two audio outputs.

SPECIFICATIONS

Model no.	M-802RC-AM	M-802RCB-AM
Power Source	24V DC (Powered by M-8080D or M-804EX)	
Audio Output	Line output 1 - 2 : 0 dBV, 1.8k Ω , Maximum output 20dBu (7.75V) , electronic balanced, screw terminal (3 pins x 2)	
RD IN	Transmits and receives AES3 digital audio plus control data Connect to M-8080D or M-804EX, RJ45 Connector	
Frequency Response	20 - 20,000 Hz, ± 3 dB	
Total Harmonic Distortion	0.01%	
S/N Ratio	Over 105dB (A weighted)	
Crosstalk	Over 79dB (A weighted)	
Control	Volume / routing	
Display	LC-Display Displays device information : ID, Volume, communication status	
Operating Temperature	0°C to +40°C (32 °F to 104 °F)	
Operating Humidity	90% RH or less (no condensation)	
Finish	Panel: Polycarbonate + ABS, white (RAL9016 or equivalent)	Panel: Polycarbonate + ABS, black
Dimensions	147 (W) x 86 (H) x 65 (D) mm (5.79" x 3.39" x 2.56")	
Weight	0.3 kg	
Accessory	Front cover $\times$ 1, Wall mounting screw (4 x ϕ 30) $\times$ 4, Plastic anchor $\times$ 4	

APPEARANCE

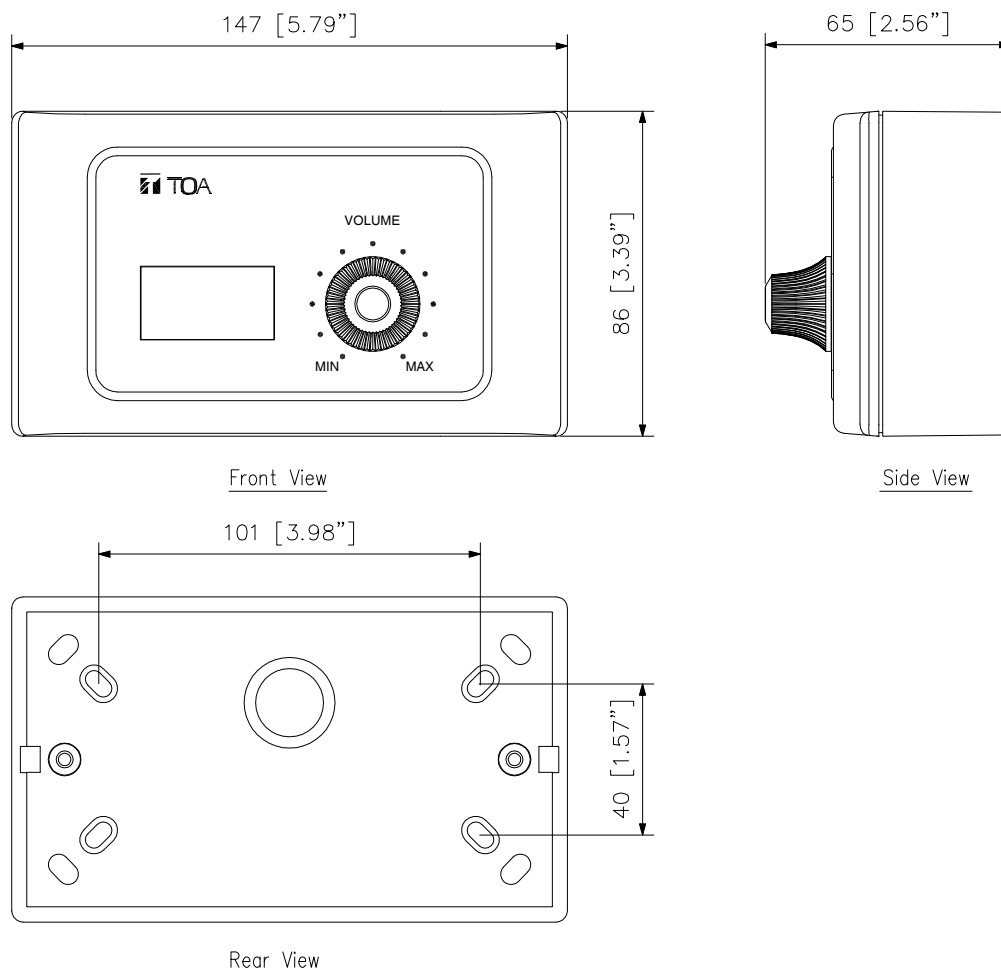

UNIT:mm SCALE:1/2