



powered by
Eagle Eye Networks


Capture Cloud VMS

WHAT IS THE CAPTURE CLOUD VMS?

The Capture Cloud VMS is a fully managed cloud video surveillance solution, delivering an end-to-end video management system that's simple to deploy and easy to use. It supports all modern browsers and works on Windows, Mac, even Linux with no plugins to install.

FULLY MOBILE

View video anytime, anywhere. The fully functional iOS and Android applications provide complete access to live and recorded video and can also be used to install, configure and manage the system.



GOT CLOUD?

Capture Cloud provides a cloud based, video management system. The CMVR is installed onsite, connects to your cameras, records video locally, and then securely synchronizes both video and meta data to the Capture Cloud Data center. It's a robust, secure appliance specifically designed to overcome the demands of transmitting high-resolution video through the Internet.

COMPREHENSIVE CAMERA SUPPORT

We believe camera compatibility is important. There's no need to be locked into a single camera vendor. Businesses need the flexibility to work with the cameras that they choose. Bridges and CMVRs support ONVIF Profile S IP cameras. Combo Bridges and CMVRs support IP as well as NTSC and PAL analog cameras. For an up to date list of all compatible cameras visit www.een.com/cameras.

WORRY FREE MANAGEMENT

All of the software in the Capture Cloud and firmware on the Bridge is managed and updated by Eagle Eye Networks.

SECURITY SIMPLIFIED

With Eagle Eye Complete Privacy Encryption™, video is fully encrypted during transmission and at rest. The Bridge has no open ports to the Internet, eliminating security vulnerabilities commonly found in other systems and requiring no router or firewall adjustments.

Compact CMVR

224+ / 225 / 324+ / 325



The Eagle Eye Cloud Managed Video Recorder (CMVR) stores video and acts as a gateway from your premises to the Eagle Eye Cloud Data Center where your video can also be stored and managed by the Eagle Eye Cloud VMS. It provides video storage, video buffering, a secure connection, bandwidth management, and monitoring of cameras.

These small form factor CMVRs are suitable for applications up to 8 cameras at 4 MP when a server rack is not available. They are suitable for wall or shelf mounting. The CMVR 225/325 is a ruggedized, all aluminum version with a broader industrial temperature range and includes 4 POE ports for direct camera connection. It is sometimes utilized in vehicle applications.

RECORDING FEATURES


- Video encrypted in transit and at rest
- Fully cloud managed
- Intelligent Bandwidth Management with local buffering
- Motion or continuous recording
- Optional audio recording

WEB INTERFACE & MOBILE FEATURES

- Native iOS and Android apps
- View live and recorded video
- Compatible with all modern browsers
- Motion detection with alerts
- Map and floorplan display

SYSTEM ADMINISTRATION

- 100% browser-based; no software
- Granular user permissions
- Multi-site support
- Point and click video sharing
- Centralized management

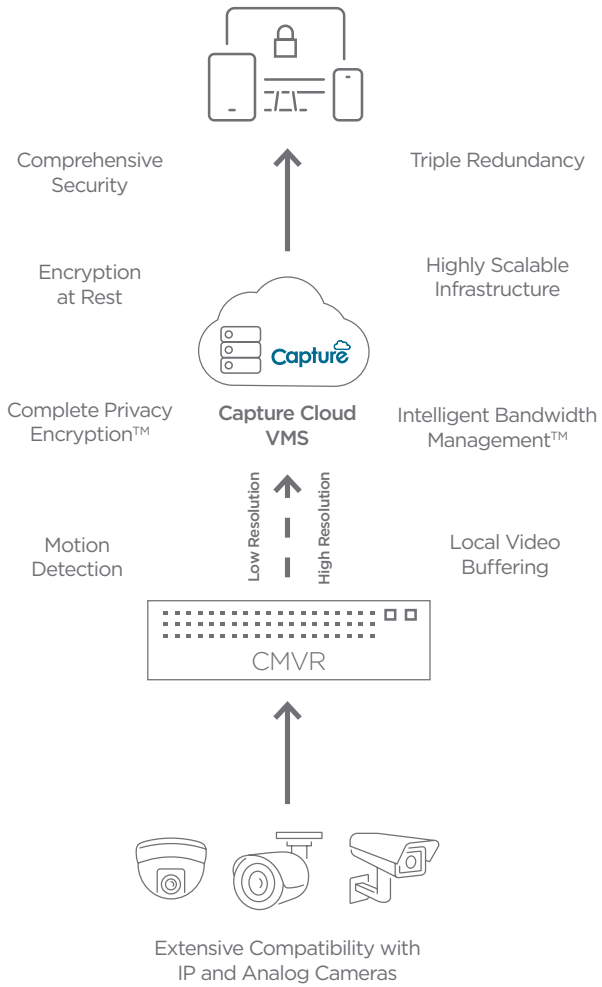

NETWORK FEATURES

- Automatic network configuration
- Secure camera network (dual network ports)
- No inbound connections needed
- Packet loss detection/reporting
- Network disconnected alerts


MANAGEMENT FEATURES

- Remote management
- Automatic camera discovery
- Automatic camera configuration
- Advanced motion detection
- Local video buffering
- Configuration synced to Cloud
- Camera trouble alerts
- Internet outage alerts
- Fully cloud managed



STANDARD SUPPORT

- Free of charge with an active subscription
- Warranty – 2 years
- 24/7 email and web support
- 8 a.m. to 6 p.m. phone support



MODEL	CMVR 224+	CMVR 225	CMVR 324+	CMVR 325
Max Cameras*	Up to 6 IP Cameras @4MP	Up to 6 IP Cameras @4MP	Up to 12 IP Cameras @4MP	Up to 8 IP Cameras @4MP
Max Analytic Count*	5	5	5	5
LPR Support*	No	No	No	No
Storage Capacity	2TB 60 days for 6 cameras @ 1MP	1TB 30 days for 6 cameras @ 1MP	4TB 60 days for 12 cameras @ 1MP	2TB 45 days for 8 cameras @ 1MP
POE Camera Ports	None	4 port, Class 3	None	4 port, Class 3
Network Ports	Dual Gigabit	1 Gigabit, 4X100 Megabit	Dual Gigabit	1 Gigabit, 4X100 Megabit
Video Output	HDMI (1), VGA (1)	HDMI (1), DP (1)	HDMI (1), VGA (1)	HDMI (1), DP (1)
Dimension	180x 127 x 64 mm 7.08 x 5.00 x 2.50 in	127 x 172 x 75 mm 5.00 x 6.77 x 2.95 in	180x 127 x 64 mm 7.08 x 5.00 x 2.50 in	127 x 172 x 75 mm 5.00 x 6.77 x 2.95 in
Weight	1.20 kg 2.65 lbs	1.32 kg 2.91 lbs	1.37 kg 3.03 lbs	1.36 kg 3.0 lbs
Maximum Power Consumption	External 100-240 VAC, 20 W	External 100-240 VAC, 22 W	External 100-240 VAC, 20 W	External 100-240 VAC, 22 W
Operating Temperature Range	-10-50° C 14-122° F	-10-50° C 14-122° F	-10-50° C 14-122° F	-10-50° C 14-122° F
Operating Humidity Range	0-70%	0-70%	0-70%	0-70%
Certifications	FCC, UL, CE, UKCA, PSE, NOM, ACM, RoHS, CTick, WEEE	UL, CE, PSE, CB, TIS	FCC, UL, CE, UKCA, PSE, NOM, ACM, RoHS, CTick, WEEE	UL, CE, PSE, CB, TIS
Rapid Replacement Part Numbers	EN-RR224p-1 (Monthly) EN-RR224p-12 (Yearly)	EN-RR225-1 (Monthly) EN-RR225-12 (Yearly)	EN-RR324p-1 (Monthly) EN-RR324p-12 (Yearly)	EN-RR325-1 (Monthly) EN-RR325-12 (Yearly)