



powered by
Eagle Eye Networks


Capture Cloud VMS

WHAT IS THE CAPTURE CLOUD VMS?

The Capture Cloud VMS is a fully managed cloud video surveillance solution, delivering an end-to-end video management system that's simple to deploy and easy to use. It supports all modern browsers and works on Windows, Mac, even Linux with no plugins to install.

FULLY MOBILE

View video anytime, anywhere. The fully functional iOS and Android applications provide complete access to live and recorded video and can also be used to install, configure and manage the system.



GOT CLOUD?

Capture Cloud provides a cloud based, video management system. The Bridge is installed onsite, connects to your cameras, records video locally, and then securely synchronizes both video and meta data to the Capture Cloud Data center. It's a robust, secure appliance specifically designed to overcome the demands of transmitting high-resolution video through the Internet.

COMPREHENSIVE CAMERA SUPPORT

We believe camera compatibility is important. There's no need to be locked into a single camera vendor. Businesses need the flexibility to work with the cameras that they choose. Bridges and CMVRs support ONVIF Profile S IP cameras. Combo Bridges and CMVRs support IP as well as NTSC and PAL analog cameras. For an up to date list of all compatible cameras visit www.een.com/cameras.

WORRY FREE MANAGEMENT

All of the software in the Capture Cloud and firmware on the Bridge is managed and updated by Eagle Eye Networks.

SECURITY SIMPLIFIED

With Eagle Eye Complete Privacy Encryption™, video is fully encrypted during transmission and at rest. The Bridge has no open ports to the Internet, eliminating security vulnerabilities commonly found in other systems and requiring no router or firewall adjustments.

Compact Bridge

304+ / 305 / 306+ / 404+ / 504+



The Eagle Eye Bridge acts as a gateway from your premises to the Eagle Eye Cloud Data Center where your video is stored and managed by the Eagle Eye Cloud VMS. It provides a secure connection, video buffering, bandwidth management, and monitoring of cameras.

These small form factor bridges are suitable for applications up to 50 cameras at 4 MP when a server rack is not available. They can be wall or shelf mounted. This family of bridges are equipped with ruggedized, allaluminum enclosures designed to operate in a broad ambient temperature range. These bridges include a display screen providing operational status at a glance.

RECORDING FEATURES


- Video encrypted in transit and at rest
- Fully cloud managed
- Intelligent Bandwidth Management with local buffering
- Motion or continuous recording
- Optional audio recording

WEB INTERFACE & MOBILE FEATURES

- Native iOS and Android apps
- View live and recorded video
- Compatible with all modern browsers
- Motion detection with alerts
- Map and floorplan display

SYSTEM ADMINISTRATION

- 100% browser-based; no software
- Granular user permissions
- Multi-site support
- Point and click video sharing
- Centralized management

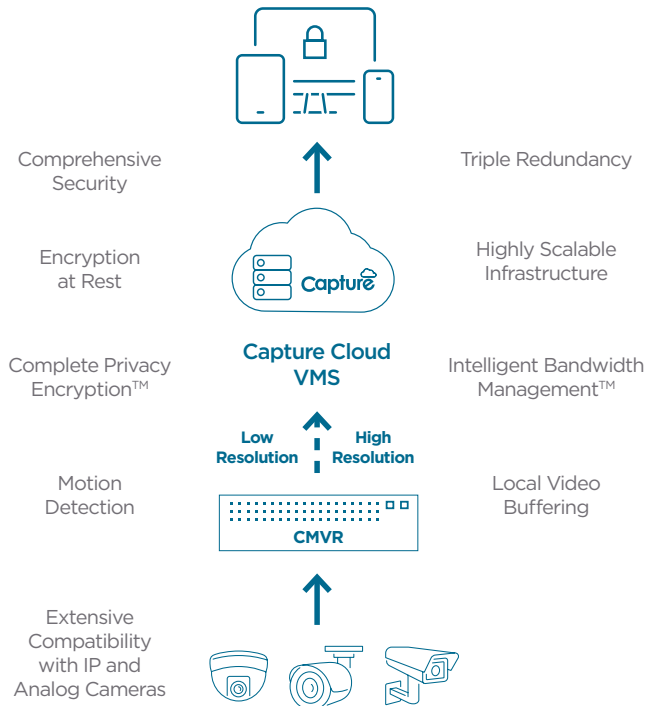

NETWORK FEATURES

- Automatic network configuration
- Secure camera network (dual network ports)
- No inbound connections needed
- Packet loss detection/reporting
- Network disconnected alerts

MANAGEMENT FEATURES

- Remote management
- Automatic camera discovery
- Automatic camera configuration
- Advanced motion detection
- Local video buffering
- Configuration synced to Cloud
- Camera trouble alerts
- Internet outage alerts
- Fully cloud managed



STANDARD SUPPORT

- Free of charge with an active subscription
- Warranty - 2 years
- 24/7 email and web support
- 8 a.m. to 6 p.m. phone support



| MODEL | BRIDGE 304+ | BRIDGE 305 | BRIDGE 306+ | BRIDGE 404+ | BRIDGE 406+ | BRIDGE 504+ |
|--------------------------------|--|--|--|--|--|--|
| Max Cameras* | Up to 20 IP Cameras @4MP | Up to 12 IP Cameras @4MP, 4 POE | Up to 25 IP Cameras @4MP | Up to 35 IP Cameras @4MP | Up to 35 IP Cameras @4MP | Up to 50 IP Cameras @4MP |
| Max Analytic Count* | 5 | 5 | 10 | 15 | 15 | 20 |
| LPR Support* | No | No | Up to 2 Cameras | No | Up to 2 LPR cameras | Up to 4 LPR Cameras |
| Video Buffer | 2 days on premises | 2 days on premises | 2 days on premises | 2 days on premises | 2 days on premises | 2 days on premises |
| POE Camera Ports | None | 4 ports, Class 3 | None | None | None | None |
| Network Ports | Dual Gigabit | 1 Gigabit, 4X100 Megabit | Dual Gigabit | Dual Gigabit | Dual Gigabit | Dual Gigabit |
| Video Output | HDMI (1), DP (1) | HDMI (1), DP (1) | HDMI (1), DP (1) | HDMI (1), VGA (1) | HDMI (2) | HDMI (1), DP (1) |
| Dimension | 180x 127 x 64mm 7.08 x 5.00 x 2.50 in | 172 x 127 x 75mm 6.75 x 5.01 x 3.00 in | 180x 127 x 64mm 7.08 x 5.00 x 2.50 in | 180x 127 x 64mm 7.08 x 5.00 x 2.50 in | 180x 127 x 64 mm 7.08 x 5.00 x 2.50 in | 229 x 127 x 83mm 9.00 x 5.00 x 3.25 in |
| Weight | 1.20 kg 2.65 lbs | 1.32 kg 2.90 lbs | 1.27 kg 2.80 lbs | 1.25 kg 2.77 lbs | 1.25 kg 2.77 lbs | 2.39 kg 5.27 lbs |
| Maximum Power Consumption | External 100-240 VAC, 20 W | *External 100-240 VAC, 22 W | External 100-240 VAC, 25 W | External 100-240 VAC, 30 W | External 100-240 VAC, 30 W | External 100-240 VAC, 40 W |
| Operating Temperature Range | -10-50° C 14-122° F | -10-50° C 14-122° F | -10-50° C 14-122° F | -10-50° C 14-122° F | -10-50° C 14-122° F | -10-50° C 14-122° F |
| Operating Humidity Range | 0-70% | 0-70% | 0-70% | 0-70% | 0-70% | 0-70% |
| Certifications | FCC, UL, CE, UKCA, NOM, ACM, RoHS, CTick | FCC, UL, PSE, CE, CCC (S&E), REACH, RoHS, C-Tick | FCC, UL, CE, UKCA, NOM, ACM, RoHS, CTick | FCC, UL, CE, UKCA, NOM, ACM, RoHS, CTick | FCC, UL, CE, UKCA, NOM, ACM, RoHS, CTick | FCC, UL, CE, UKCA, NOM, ACM, RoHS, CTick |
| Rapid Replacement Part Numbers | EN-RR000-1 (Monthly) EN-RR000-12 (Yearly) | EN-RR000-1 (Monthly) EN-RR000-12 (Yearly) | EN-RR000-1 (Monthly) EN-RR000-12 (Yearly) | EN-RR000-1 (Monthly) EN-RR000-12 (Yearly) | EN-RR000-1 (Monthly) EN-RR000-12 (Yearly) | EN-RR504p-1 (Monthly) EN-RR504p-12 (Yearly) |

* Typical - please utilize the Eagle Eye VMS Bridge Wizard for precise capacity