


STRANDED GENERAL PURPOSE CABLE


22/4 CM/CL2 UNSHIELDED

ADI PRO


SPEC SHEET



RT-8001501



RT-8002501



RT-8002101

Physical Characteristics

Standard Compliance: UL444/UL13

Certifications UL: E507576-PYV OR E535998

Conductor: 22 AWG Bare Annealed Copper

Insulation: PVC

Conductor Color Code:

- 1: Red
- 2: Black
- 3: White
- 4: Green


Rip Cord: Applied longitudinally under jacket

Jacket: PVC

OD: 4.0mm

Jacket Legend:

- ADI PRO P/N 4C 22AWG E507576-PYV C(UL)US CM OR E535998 CL2 75C RoHS

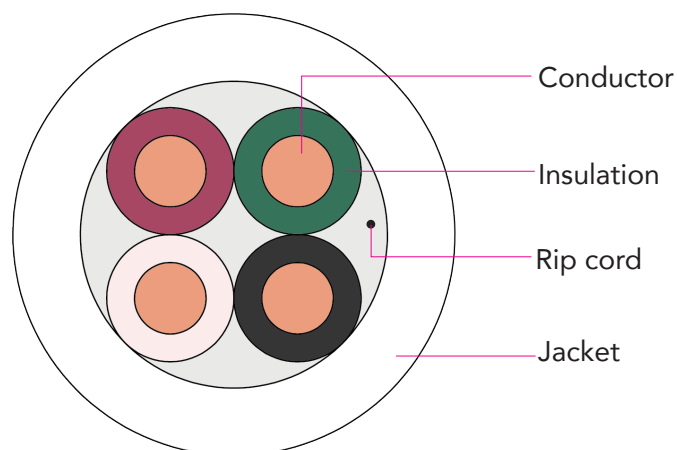

Part#	Color	Length
RT-8001501	White	500' Speed Coil
RT-8002501	White	500' Express Reel Box
RT-8002101	White	1000' Express Reel Box

Properties

Operating Voltage: 300 Volts max.

DC Resistance: 17.5 Ohms / 1000 ft. at 20°C

Capacitance: 480PF

Conductor Resistance: 54.3Ω/KM

Temperature: -20°C to 60°C

Flame Rating: UL 1685 Vertical Tray

RoHS Compliant: Yes

Country of Origin: VIETNAM



RoHS



For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands