


# STRANDED GENERAL PURPOSE CABLE


18/4 CM/CL2 UNSHIELDED

# ADI PRO

## SPEC SHEET



RT-8004109



RT-8004509

### Physical Characteristics

**Standard Compliance:** UL444/UL13

**Certifications UL:** E507576-PYV OR E535998

**Conductor:** 18 AWG Bare Annealed Copper

**Insulation:** PVC

### Conductor Color Code:

- 1: Red
- 2: Black
- 3: White
- 4: Green

**Rip Cord:** Applied longitudinally under jacket

**Jacket:** PVC

**OD:** 5.0mm

### Jacket Legend:

- ADI PRO P/N 4C 18AWG E507576-PYV C(UL)US CM OR E535998 CL2 75C RoHS

### Properties

**Operating Voltage:** 300 Volts max.

**DC Resistance:** 17.5 Ohms / 1000 ft. at 20°C

**Capacitance:** 530PF


**Conductor Resistance:** 21.4Ω/KM

**Temperature:** -20°C to 60°C

**Flame Rating:** UL 1685 Vertical Tray

**RoHS Compliant:** Yes

**Country of Origin:** VIETNAM

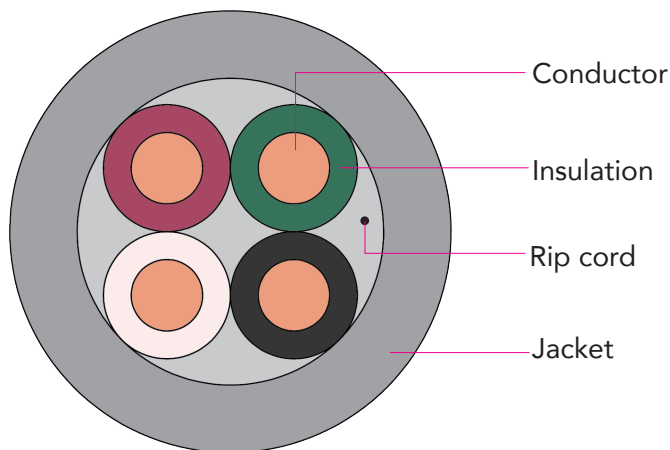

Part#	Color	Length
RT-8004509	Gray	500' Express Reel Box
RT-8004109	Gray	1000' Express Reel Box



**RoHS**



For more information contact your ADI Sales person or visit [adiglobal.com/adiexclusivebrands](http://adiglobal.com/adiexclusivebrands)