


STRANDED GENERAL PURPOSE CABLE


18/4 CM/CL2 UNSHIELDED

ADI PRO

SPEC SHEET



RT-8004109



RT-8004509

Physical Characteristics

Standard Compliance: UL444/UL13

Certifications UL: E507576-PYV OR E535998

Conductor: 18 AWG Solid Bare Annealed Copper

Insulation: PVC

Conductor Color Code:

- 1: Red
- 2: Black
- 3: White
- 4: Green

Rip Cord: Applied longitudinally under jacket

Jacket: PVC

OD: 5.0mm

Jacket Legend:

- ADI PRO P/N 4C 18AWG E507576-PYV C(UL)US CM OR E535998 CL2 75C RoHS

Properties

Operating Voltage: 300 Volts max.

DC Resistance: 17.5 Ohms / 1000 ft. at 20°C

Capacitance: 530PF


Conductor Resistance: 21.4Ω/KM

Temperature: -20°C to 60°C

Flame Rating: UL 1685 Vertical Tray

RoHS Compliant: Yes

Country of Origin: VIETNAM

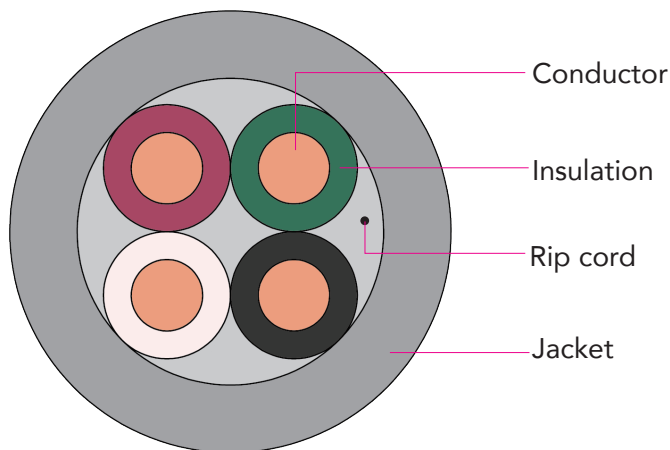

Part#	Color	Length
RT-8004509	Gray	500' Express Reel Box
RT-8004109	Gray	1000' Express Reel Box



RoHS



For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands