


SPECIFICATIONS


FEATURES & BENEFITS:

- OPTICAL CABLE CORPORATION'S, RTS4U SERIES LOW PROFILE FIBER OPTIC CROSS CONNECT ENCLOSURES PROVIDE FIBER MANAGEMENT, CONNECTIVITY, AND DISTRIBUTION FOR 6-144 FIBERS. ACCOMMODATES ALL CROSS CONNECT FUNCTIONS (SPlicing, TERMINATION, AND INTERCONNECTION) FOR OUTSIDE PLANT, BACKBONE, AND BUILDING CABLES.
- ACCOMMODATES OCC 600 SERIES SNAP-IN ADAPTER PLATES. RTS4U ENCLOSURE PORT COUNT IS BASED UPON THE PORT DENSITY OF THE ADAPTER PLATES. ADAPTER PLATES ORDERED SEPARATELY.
- RTS4U ENCLOSURES PROVIDE INNOVATIVE FIBER ORGANIZATION UTILIZING STACKABLE FIBER HOOPS DESIGNED TO MAINTAIN ORDERLY FIBER MANAGEMENT AND ALLOW FOR GREATER SEGREGATION OF INCOMING FIBER CABLES
- PLASTIC GROMMETS PROVIDE RELIABLE CABLE PROTECTION AT ALL CABLE ENTRANCES AND EXITS.
- RUGGED 16-GAUGE STEEL CONSTRUCTION WITH A DURABLE POWDER COAT FINISH. RTS4U DRAWER COLOR: B = BLACK
- SLIDING TRAY PROVIDE EASY FRONT AND REAR ACCESS AND CAN BE REMOVED ENTIRELY FROM THE ENCLOSURE FOR A CONVENIENT WORK SURFACE
- HINGED TRANSPARENT COVER ALLOWS FOR VISUAL INSPECTION OF PORTS AND DEFINED LABELING FIELD PROVIDED FOR TIA 606A COMPLIANCE.
- STANDARD UNIVERSAL MOUNTING BRACKETS INCLUDED TO FIT 19" AND 23" RACKS OR CABINETS. OPTIONAL RECESS BRACKETS ARE AVAILABLE TO ALLOW RTS4U ENCLOSURES TO FIT FLUSH WITH RACK
- ALL PLASTIC COMPONENTS ARE HIGH-IMPACT SELF-EXTINGUISHING, UL LISTED RATING 94 V-0.
- SPLICE TRAY KIT(S) AND EXTERNAL STRAIN RELIEF BRACKETS MAY BE ORDERED SEPARATELY AS AN OPTION FOR THE RTS4U ENCLOSURE.

REVISION HISTORY				
REV/SHT	DESCRIPTION	DATE	ECN	CHECKED
A	ALL RELEASE NEW	1/14/14	NEW	JH

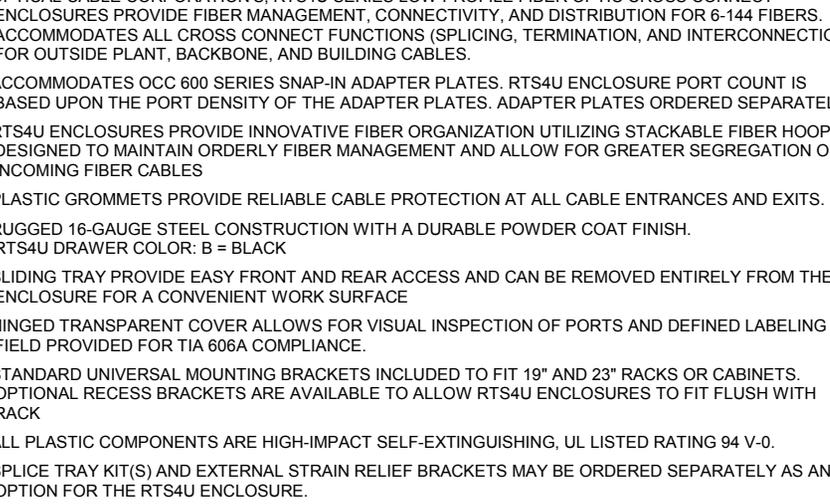

REAR VIEW
RTS4U-12APB (SHOWN)

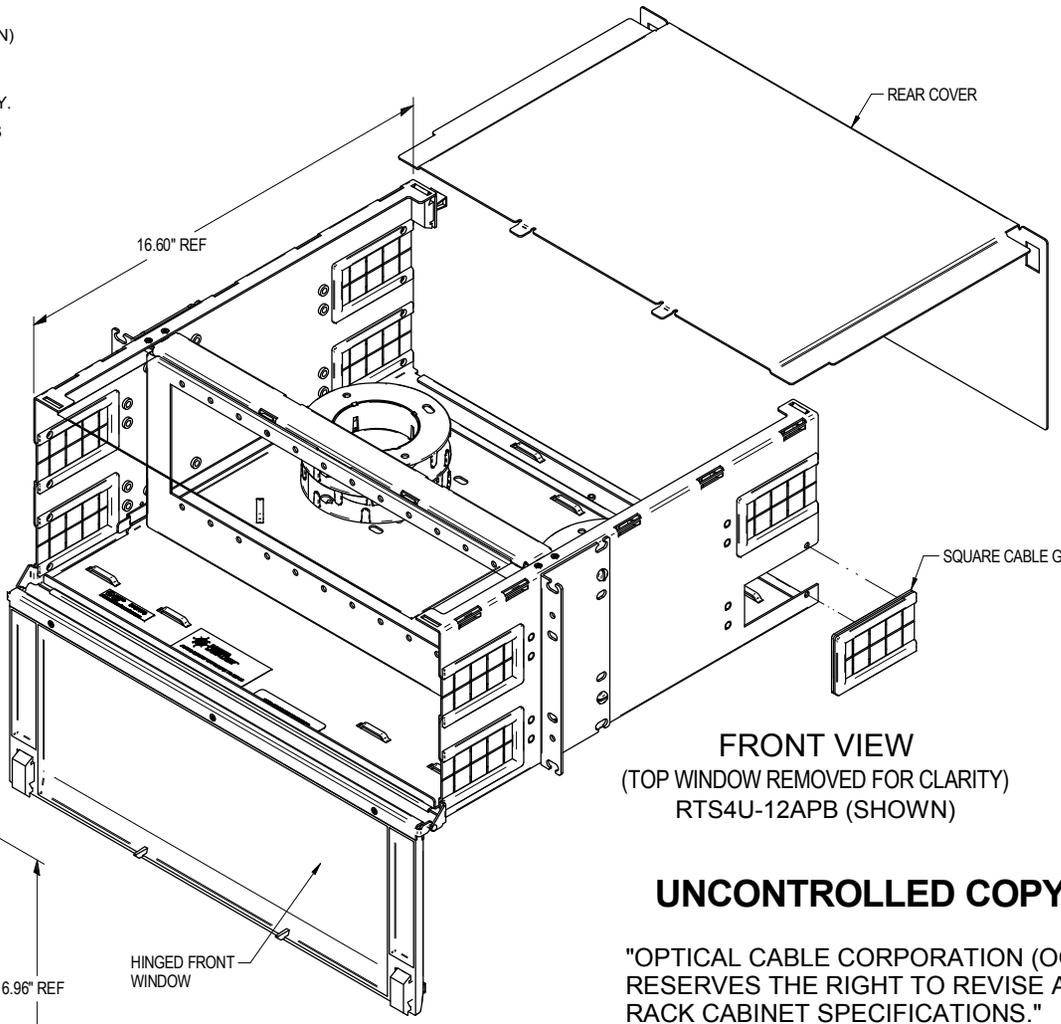

FRONT VIEW
(TOP WINDOW REMOVED FOR CLARITY)
RTS4U-12APB (SHOWN)

UNCONTROLLED COPY

"OPTICAL CABLE CORPORATION (OCC) RESERVES THE RIGHT TO REVISE ANY RACK CABINET SPECIFICATIONS."

RTS4U-12APB	CABINET, RACK MNT, RTS, 4 UNIT, 12 ADAPTER PLATES, BLACK
OCC PART NO.	DESCRIPTION

<p>THIRD ANGLE PROJECTION</p> <p>CRITICAL DIMENSION CODE</p> <p>Ⓢ = FUNCTION</p> <p>Ⓜ = MATING</p> <p>ⓐ = AUDIT</p>		<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES</p> <p>TOLERANCES:</p> <p>FRACTIONS ±1/32"</p> <p>ANGLES ±1/2°</p> <p>3 PLACE DECIMALS ±.015"</p> <p>2 PLACE DECIMALS ±.03"</p>		<p>THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANUFACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.</p>		<p>OCC OPTICAL CABLE CORPORATION</p> <p>33 Superior Way Swannanoa, NC 28778 Phone: 828-298-2260 Fax: 828-298-2487 www.occfiber.com</p>	
<p>MATERIAL: SEE BILL OF MATERIAL</p> <p>FINISH: SEE NOTES</p>		<p>UNCONTROLLED COPY</p> <p>DRAWN: D.A.HOLBERT DATE: 1/14/14</p> <p>CHECKED: S.PORACH DATE: 1/22/14</p> <p>ENGINEER: J.YANIK DATE: 1/14/14</p> <p>APPROVED: J.HOWE DATE: 1/22/14</p> <p>PREVIOUS DWG: _____</p> <p>NEXT DWG: _____</p>		<p>DWG TITLE: CUSTOMER DRAWING, CABINET ASSEMBLY, RTS4U, RACK MNT SLIDING, 12 PLATES</p> <p>SIZE: C DWG NO.: C111655 REV: A</p>		<p>SCALE: NONE SHEET: 1 OF 2</p>	

FRONT TOP WINDOW

19.00" REF

17.20" REF

6.96" REF

HINGED FRONT WINDOW

REAR COVER

SQUARE CABLE GROMMETS

MOUNTING BRACKETS (2 REQ'D PER ASSEMBLY) WITH MOUNTING SCREWS

SLAM LATCH