

# STI FIRE SERIES STOPPER® STATION



SS-2000F



SS-2002F

## PRODUCT OVERVIEW

This STI Stopper Station with a patented design is a highly advanced push button unit that is ADA Compliant and UL Listed to U.S. and Canadian safety standards. Model SS-2000F and SS-2002F are designed specifically to complement fire alarm systems of the 21st century. Operation includes Push-to-Activate and Key-to-Reset. The unit incorporates quality features throughout, including raised lettering molded into its polycarbonate housing.

If you wish, you can protect your fire Stopper Station with a tough STI cover to help stop vandalism or accidental damage. The Mini Stopper® II cover can be ordered with an optional pre-alarm to help stop malicious activation for inside applications. Outside applications require a Mini Weather Stopper® to be mounted over the Stopper Station button to maintain UL Approval.

## KEY FEATURES

### General Information

- Push button switches designed specifically to complement fire alarms systems of the 21st century.
- Simple Push-to-Activate and Key-to-Reset operation.
- Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).

### Design

- Patented design helps stop accidental activation.
- Raised letters and symbols molded into housing.

### Construction

- Super tough housing.
- ADA Compliant and UL Listed to U.S. and Canadian safety standards for outdoor and indoor use.
- Stainless steel backplate with ground lug.

### Installation

- Polycarbonate complies with FDA regulations for food contact applications.
- Typical working properties of polycarbonate are -40° to 250°F (-40° to 121°C).
- When using an STI Stopper Station outdoors, UL requires unit to be protected with an STI UL Listed Weather Stopper®.

### Electronics

- SS-2000F has two replaceable N.O., SPST gold-plated contact blocks rated for 1 amp @ 250 VDC.
- SS-2002F has two Form "C" contacts rated 125/250 VAC, 10A, 1/2 HP, 30 VDC, 6A.

### Options

- Add a tough STI cover to protect against vandalism, accidental damage or weather.
- Cover available for indoor use, with a built-in alarm to help stop malicious activation.



For more information, call 1-800-888-4784 (4STI) or visit [www.sti-usa.com](http://www.sti-usa.com)



**Safety Technology  
International, Inc.**

# STI Fire Series Stopper® Station

## Dimensions and Technical Information

### MODELS AVAILABLE

- SS-200\* F** Red button Push-to-Activate Key-to-Reset
- SS-201\* F** Button with Bopper Stopper® cover
- SS-203\* F** Button with Mini Stopper® II cover with no horn - flush mount
- SS-204\* F** Button with Mini Stopper II cover with horn - flush mount
- SS-205\* F** Button with Mini Weather Stopper® cover - flush mount
- SS-206\* F** Button with Mini Weather Stopper cover - surface mount
- SS-207\* F** Button with Mini Stopper II cover without horn with spacer
- SS-208\* F** Button with Mini Stopper II cover with horn with spacer

### APPROVALS & WARRANTY

#### TESTING

- It has been tested and approved or listed by:
- Underwriter Laboratories File No. S2466
  - Canadian Underwriter Laboratories Issue File No. S2466
  - California State Fire Marshal approval 7150-1416:102
  - ADA Compliant

#### NOTE

Please note that it is mandated by UL that your STI Stopper Station be protected with an STI UL Listed Weather Stopper® or Mini Weather Stopper® cover when used outdoors.

#### WARRANTY

Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).

\* **NOTE:** Last digit of part number choose:


"0" for Push, Key-To-Reset (Octagon)

"2" for Push, Key-To-Reset (Mushroom)

For complete cover information, see spec sheet on the specific cover

### Accessories

- SUB-102722-R** Plastic Spacer - red for SS-2000F
- 19030** One extra key for 2000F model
- 18061** One extra key for 2002F model
- 10196** N.O. contact for 2000F model
- 10197H** Contact holder for "0" button only
- 10198** N.C. contact for 2000F model
- SUB-71100A-R** Back Box - red for SS-2002F (included)

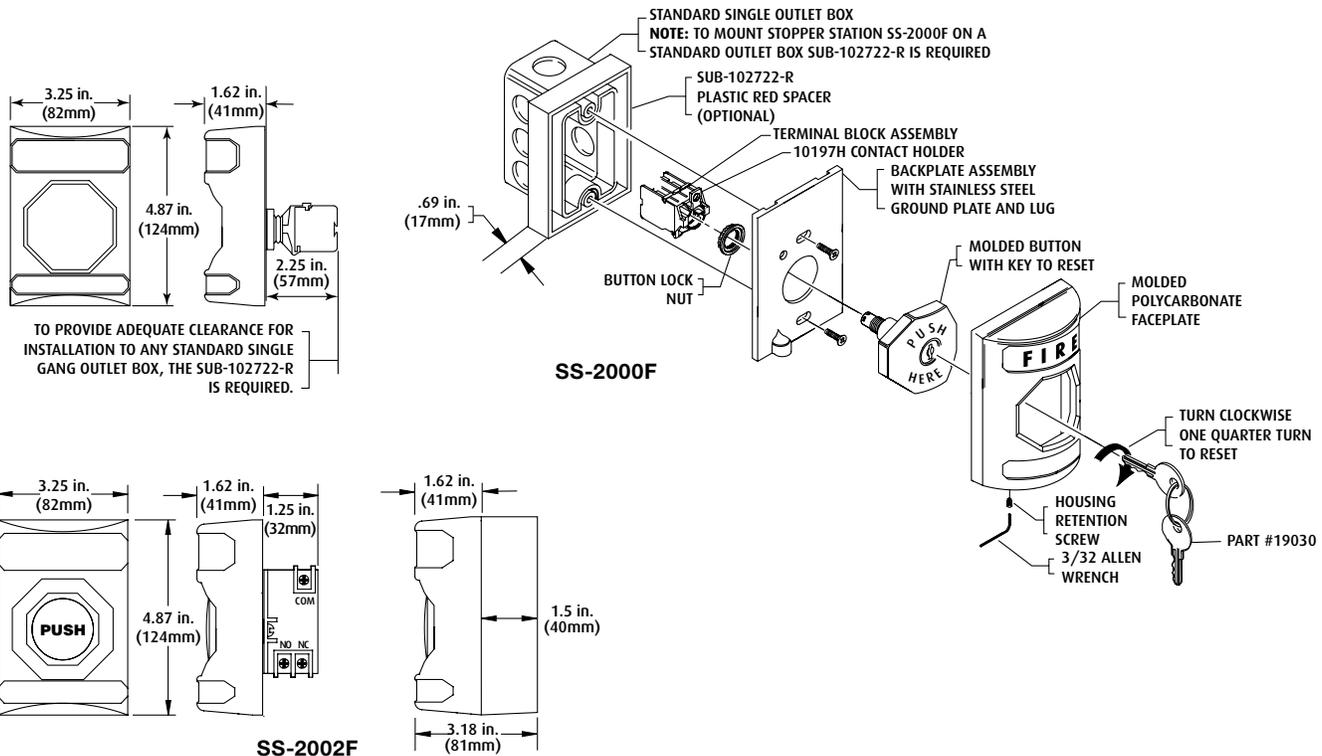

**Safety Technology International, Inc.**

2306 Airport Road  
Waterford, Michigan  
48327, USA

Tel: 248-673-9898  
Fax: 248-673-1246  
Toll-free: 800-888-4784  
info@sti-usa.com  
www.sti-usa.com

Unit 49G Pipers Road  
Park Farm Industrial Estate  
Redditch, Worcestershire  
B98 0HU England

Tel: 44 (0) 1527 520 999  
Fax: 44 (0) 1527 501 999  
www.sti-europe.com