



TALKAPHONE

AOR ANALOG CALL STATION



AREA OF RESCUE ASSISTANCE

THE AOR ANALOG CALL STATION IS AN INDOOR, HANDS-FREE ADA-COMPLIANT COMMUNICATION ENDPOINT FOR USE WITH THE AOR SERIES SYSTEM IN AN AREA OF RESCUE ASSISTANCE.

FEATURES

- Fully compliant with IBC, ADAAG, ICC A117.1 Ch. 7, and NFPA 72
- Vandal resistant stainless steel faceplate and metal button
- Phone line powered: no power supply or battery backup needed
- Push button once to call, then speak hands-free
- Two (2) LED indicators for hearing impaired (calling, answered)
- Built-in auto-dialer can dial up to five (5) numbers. If first number does not answer or is busy, dials second number. If second number does not answer or is busy, dials third number—and so on.
- Auto-answer on inbound calls allows security to monitor and initiate calls with the call station
- Automatically inform attendant of the location of call station through recorded message that plays at the beginning of the call
- Optional relay output

General Specifications

AOR ANALOG CALL STATION	
Construction:	0.09" (2.2mm) #4 brushed 304 stainless steel faceplate
Weight:	6 lbs (2.7kg)
Mounting:	Flush and surface mounts
Communication:	2-way hands-free communication
Digital Capacity:	Up to 20-digits, including 4-second pause, for each of five (5) phone numbers
Power Source:	Phone line powered (requires 20mA at 24 V off-hook)
Connection:	Parallel tip and ring flying leads for field installation
Programming:	Non-volatile EEPROM programming can be done from any telephone No battery backup is needed.
"On Time":	Programmable for no limit or from 1 to 9 minutes in 1-minute increments
Wiring Requirements:	1 twisted-shielded pair
Operating Temperature:	32°F to +158°F (0°C to +70°C)
Relative Humidity:	Up to 95% non-condensing
Warranty:	5-year limited warranty

Configurations



Flush Mount Configuration

Model:	AOR-CSE-FM
Dimensions (W x H x D):	4.75 x 8.23 x 2.75 in. (121 x 209 x 70 mm)
Weight:	5.5 lbs. (2.5 kg)



Surface Mount Configuration

Model:	AOR-CSE-SM
Dimensions (W x H x D):	5.50 x 8.38 x 2.25 in. (140 x 213 x 57 mm)
Weight:	6.0 lbs. (2.7 kg)


ORDERING INFORMATION

	Base Model	Verbiage	Mounting	Relay Output
	AOR-CS	E "EMERGENCY" verbiage	-FM "Flush mount configuration"	[Leave Blank] Built-in relay output not included
			-SM Surface mount configuration	-1RO One (1) built-in relay output
Example	AOR-CS	E	-SM	-1RO

All specifications are subject to change without notice.


DIMENSIONAL DRAWING – AOR-CSE-FM

All dimensions are in inches and are provided for reference only.

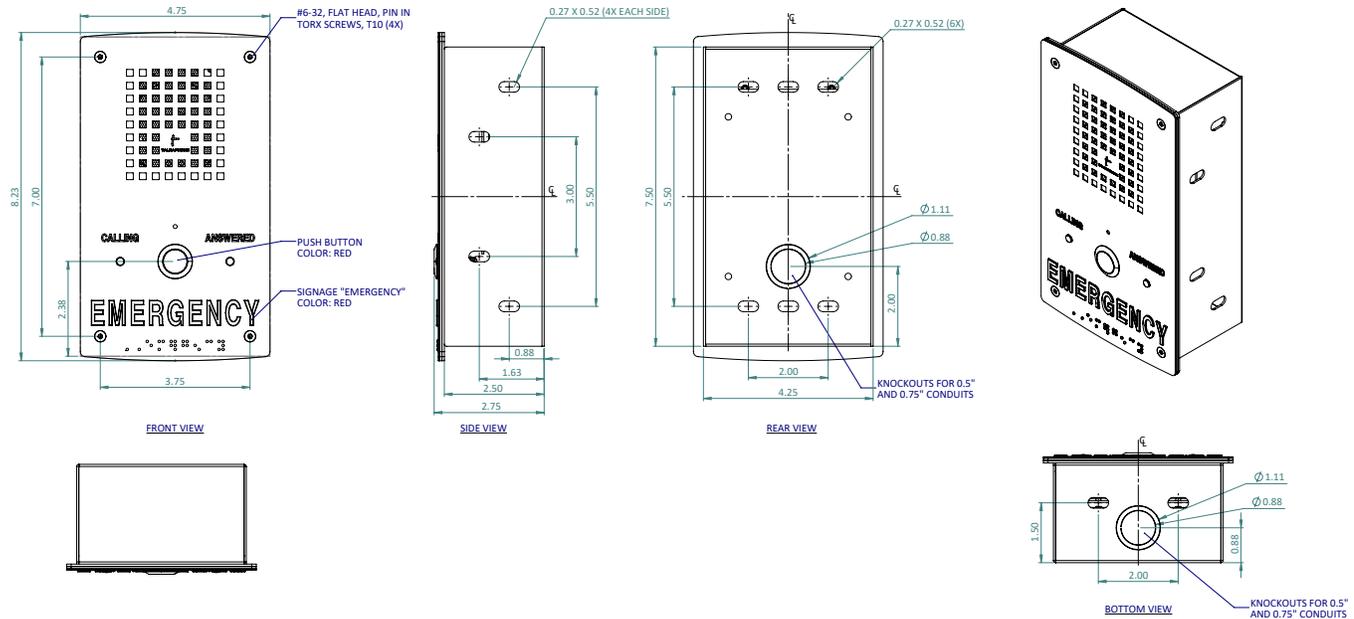

DIMENSIONAL DRAWING – AOR-CSE-SM

All dimensions are in inches and are provided for reference only.

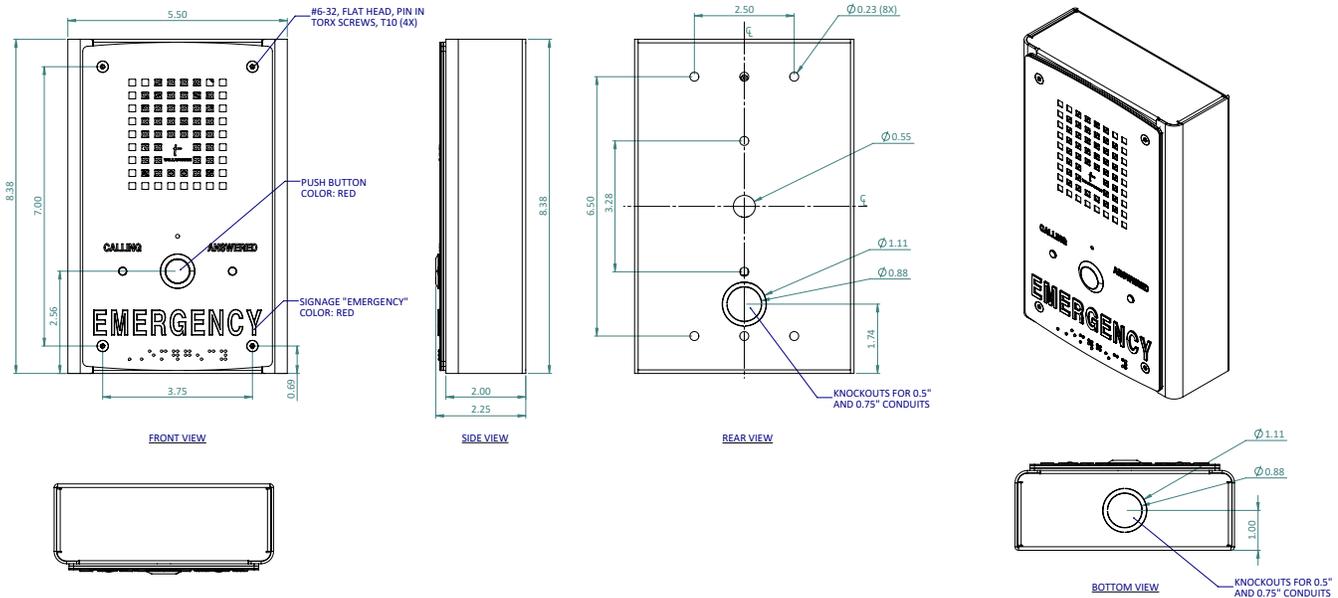

THE LEADERS IN SECURITY AND LIFE SAFETY COMMUNICATIONS

Tel: 773-539-1100
 Email: info@talkaphone.com
 Web: www.talkaphone.com

7530 North Natchez Avenue
 Niles, Illinois 60714

Terms of Use and Limited Warranty

This Product includes intellectual property and proprietary rights owned by Talk-A-Phone, LLC and/or its licensors. Your use of this Product confirms your agreement that Talk-A-Phone, LLC and/or its licensors retain all right, title and interest in and to all such property; that your rights are to access and use the Product for your internal business use only; that all Product elements will be maintained as confidential; and that the Product may not be rented, leased or lent to third parties, reverse engineered, decompiled or disassembled, or otherwise used for any purpose other than as an access device for your premises.

Talk-A-Phone, LLC warrants Talk-A-Phone Emergency Phone, Call Station, and Wide-Area Emergency Broadcast System equipment against any defects in material and workmanship, under normal use, for a period of twenty-four (24) months from date of installation, provided that Talk-A-Phone receives a completed "Installation Certification" certifying the date on which the system has been installed. An "Installation Certification" card is enclosed with every unit. In the event that no "Installation Certification" is received by Talk-A-Phone, the twenty-four (24) months will commence on the date of shipment by Talk-A-Phone. Warranty period for the metal elements of models in the GP Series Pedestals, MT Series Towers, MTE Series Towers, MT/R Series Towers, PM Series Pedestals, SM Series Surface Mounts, Via Series Mounts, and WM Series Wall Mounts is five (5) years, under the same terms and conditions. Warranty period for Area of Rescue Products is sixty (60) months, under the same terms and conditions. Warranty period for Intercommunication Products is twelve (12) months, under the same terms and conditions. If the Product is found by Talk-A-Phone to be defective within the warranty period, Talk-A-Phone's only obligation, and your exclusive remedy, is for the repair or replacement of any defective parts, provided that the Product is returned to us at 7530 N. Natchez Ave., Niles, IL 60714. Talk-A-Phone shall have no obligation to furnish or pay for the labor of any third parties or bear the expense of shipping defective Products for repair. In no event shall Talk-A-Phone or its licensors or suppliers be liable for any form of exemplary or punitive damages, or any special, indirect or consequential damages. TALK-A-PHONE EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES, WHETHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event shall Talk-A-Phone or its licensors or suppliers be liable for any form of exemplary or punitive damages, or any special, indirect or consequential damages. Your use of this Product constitutes your agreement to all of the foregoing terms.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE. Further information is available at talkaphone.com/legal

Copyright 2021 Talk-A-Phone, LLC All Rights Reserved - Rev. 2/24/2021