

Battery Powered Door Prop

The ES300 series Battery Powered Door Prop Alarm is designed for applications where doors may be used for egress or ingress, but may not be held or propped open. Door open times from 1 second to 4 minutes (15 second default) are field selectable. The smaller size makes installation quick and easy.








FEATURES & BENEFITS

- Easy to install
- Alarm silences automatically when door is closed, no need for reset
- Reliable
- Economical
- Tamper resistant
- Field selectable timing options
- Weatherized unit available (add "W" to part number when ordering)
- UL Listed
- Mortise cylinder pre-installed. (MC65) Contact factory to order the ES300 without cylinder
- Made in the U.S.A.



1402 Hawthorne St. Bastrop, Texas 78602 Voice: 1-800-272-3555 Fax: 1-512-321-9181 E-mail: dsi@dsigo.com www.dsigo.com

ES300 Series Battery Powered Door Prop - Typical Application

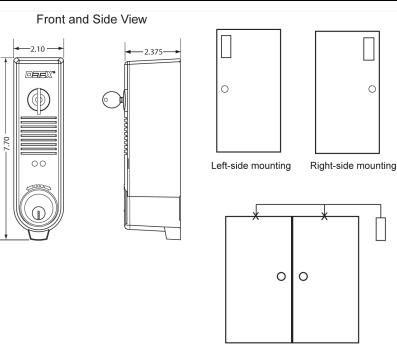

e.

Door switch actuated

ELECTRICAL SPECIFICATIONS

9VDC battery operated, with low battery alert
Key switch for reset/bypass
Intelligent circuit senses the external magnet location Automatically and sets the correct door hand
1 second, 15 seconds, 30 seconds, 45 seconds, 1 minut 2 minutes and 4 minutes
100 dB

MECHANICAL SPECIFICATIONS

ES300 xMC65:

ES300W xMC65:

Mounting: ES300: ES300 xMC65: ES300W: ES300W xMC65: Gate, wall, or door mountedGate, wall, or door mountedGate or door mounted weatherizedGate or door mounted weatherized

Dimensions: ES300

2.10" w x 7.70" h x 2.375" d

Key switch: ES300: ES300W: 2.10 w x 7.70 n x 2.375 d Mortise hardware without cylinder

Mortise hardware without cylinder Mortise hardware with cylinder Mortise hardware with cylinder

Finish: Grey

Note: Weatherized models do not have an external door switch input.

PRODUCT DESCRIPTION

The ES300 is a low-cost solution that is ideal for low risk emergency exit only doors, such as doors leading to stockroom from sales floor, stairwell doors, and various internal doors at healthcare and educational facilities. Featuring field selectable door open times from 1 second to 4 minutes, the ES300 helps prevent secure doors from being propped open to avoid a security breach in the access control system.



1402 Hawthorne St. Bastrop, Texas 78602 Voice: 1-800-272-3555 Fax: 1-512-321-9181 E-mail: dsi@dsigo.com www.dsigo.com