



HS SERIES COAXIAL ARRAY SPEAKERS



***TOA presents yet another innovation in sound:
The Coaxial Tweeter Array with
large-diameter woofer.***

Sound that brings forth an emotional response.

Cost-effective mid-size speaker system that high quality sound no matter what the applic



One of the most difficult speaker requirements to satisfy is a cost-effective mid-size speaker system that offers high quality sound no matter what the application. TOA HS Series speakers are equipped with narrow-directivity control (90° horizontal × 40° vertical). This useful feature allows tailoring the speaker's dispersion characteristics to better suit the acoustic environment in which it is installed.

The versatile HS-1200/1500 Series are compatible for use with 100V/70V lines for distributed applications. The HS Series speakers are exceptional in offering useful features at an attractive price.

Large diameter woofer (12"/15") in a compact, lightweight enclosure

With its compact dimensions and light weight, the HS Series proves ideal for use in mid to small-size venues, including restaurants and pubs, conference rooms and lecture halls, schools and similar locations, as well as for temporary installations.

Uniform high quality sound


is made possible by mounting the high frequency driver array in a coaxial configuration with the woofer.

- Extended bass frequencies for rich music reproduction
- Optimal sound delivery with well integrated low and high frequencies




Optimal choice for acoustical problems caused by high ceilings

that tend to reduce the clarity of sound reproduction, such as in sports facilities, multi-purpose halls and houses of worship.

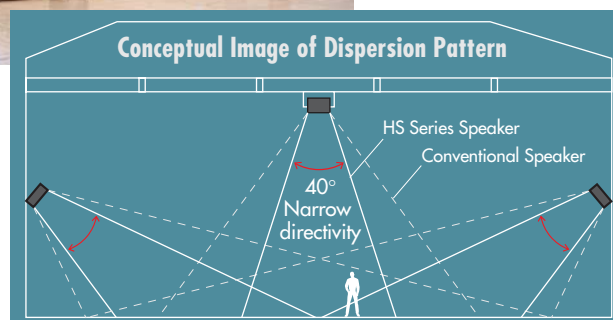


In locations with high ceilings, wide-directivity speakers cause the audio reaching the listeners to lose clarity due to overlapping of attenuated sounds.

offers
ation.

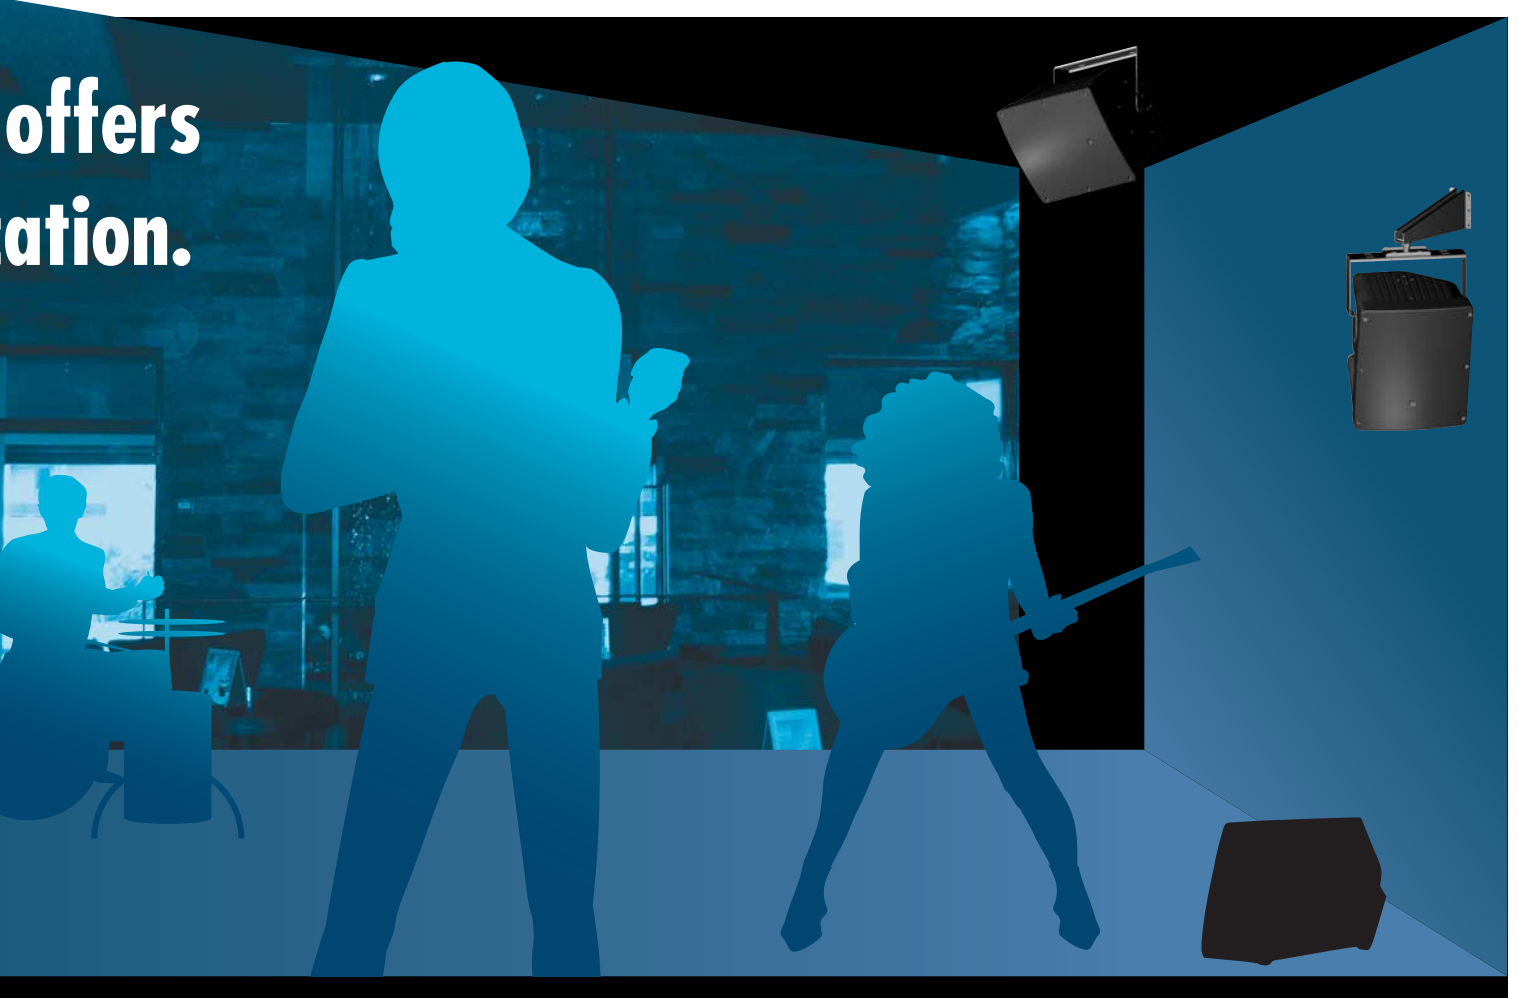


Coaxial Tweeter Array delivers accurate directivity control

HS Series speakers are equipped with narrow-directivity control (90° horizontal x 40° vertical). Well-balanced sound is delivered without treble attenuation to where the speaker is aimed, filling the acoustic space with clear sound.



Versatile installation

Unobtrusive design makes an ideal choice for permanent installations.

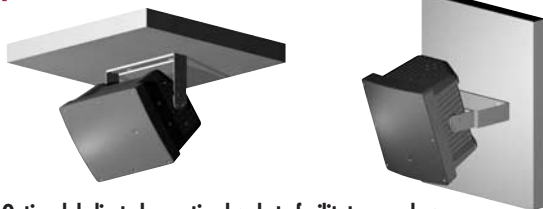

Optional dedicated mounting brackets facilitates speaker installs on walls and ceilings.

Accessory handle for easy transportability



Secure floor setting



Accessory rubber feet for straight positioning.



Wedge-shape enclosure enables use as a floor monitor.

Lineup:

12"/15" woofer, black and white finishes, low-impedance and high/low-impedance models are available.



Twin input terminal sets


The speakon terminal is ideal for quick temporary installation and for testing purposes. The screw terminals are recommended for long-term installation.



SPECIFICATIONS

Model No.	HS-1200BT		HS-1200WT
Enclosure	Sealed type		
Rated Power	Continuous pink noise: 100W, Continuous program: 300W		
Rated Impedance	8Ω 100V line: 170Ω (60W), 330Ω (30W), 670Ω (15W) 70V line: 83Ω (60W), 170Ω (30W), 330Ω (15W), 670Ω (7.5W)		
Sensitivity	97dB (1W, 1m)		
Frequency Response	70 – 20,000Hz		
Crossover Frequency	3kHz		
Directivity Angle	Horizontal: 90°, Vertical: 40°		
Speaker Component	Low frequency: 30cm (12") cone-type, High frequency: Balanced dome tweeter x 6		
Input Terminal	NEUTRIK NL4MP Speakon and M4 screw terminal, distance between barriers: 9mm		
Operating Temperature	-10°C to +50°C		
Finish	Enclosure: Polypropylene, black Punched net: Surface-treated steel plate, black		Enclosure: Polypropylene, white Punched net: Surface-treated steel plate, white
Dimensions	361 (W) x 448 (H) x 320 (D)mm		
Weight	10 kg		
Accessories	Handle x 1, Handle fitting bracket x 2, Handle mounting screw x 2, Rubber foot x 2, Rubber foot mounting screw x 2		
Options	Mounting bracket:	HY-1200VB (for vertical speaker mounting) HY-1200HB (for horizontal speaker mounting) HY-C0801 HY-W0801 ST-33B	HY-1200VW (for vertical speaker mounting) HY-1200HW (for horizontal speaker mounting) HY-C0801W HY-W0801W ST-33B
	Ceiling mount bracket:		
	Wall mount bracket:		
	Speaker stand:		

Model No.	HS-1500BT		HS-1500WT
Enclosure	Sealed type		
Rated Power	Continuous pink noise: 100W, Continuous program: 300W		
Rated Impedance	8Ω 100V line: 170Ω (60W), 330Ω (30W), 670Ω (15W) 70V line: 83Ω (60W), 170Ω (30W), 330Ω (15W), 670Ω (7.5W)		
Sensitivity	98dB (1W, 1m)		
Frequency Response	60 – 20,000Hz		
Crossover Frequency	3kHz		
Directivity Angle	Horizontal: 90°, Vertical: 40°		
Speaker Component	Low frequency: 38cm (15") cone-type, High frequency: Balanced dome tweeter x 6		
Input Terminal	NEUTRIK NL4MP Speakon and M4 screw terminal, distance between barriers: 9mm		
Operating Temperature	-10°C to +50°C		
Finish	Enclosure: Polypropylene, black Punched net: Surface-treated steel plate, black		Enclosure: Polypropylene, white Punched net: Surface-treated steel plate, white
Dimensions	451 (W) x 560 (H) x 400 (D)mm		
Weight	14 kg		
Accessories	Handle x 1, Handle fitting bracket x 2, Handle mounting screw x 2, Rubber foot x 2, Rubber foot mounting screw x 2		
Options	Mounting bracket:	HY-1500VB (for vertical speaker mounting) HY-1500HB (for horizontal speaker mounting) HY-C0801 HY-W0801 ST-33B	HY-1500VW (for vertical speaker mounting) HY-1500HW (for horizontal speaker mounting) HY-C0801W HY-W0801W ST-33B
	Ceiling mount bracket:		
	Wall mount bracket:		
	Speaker stand:		

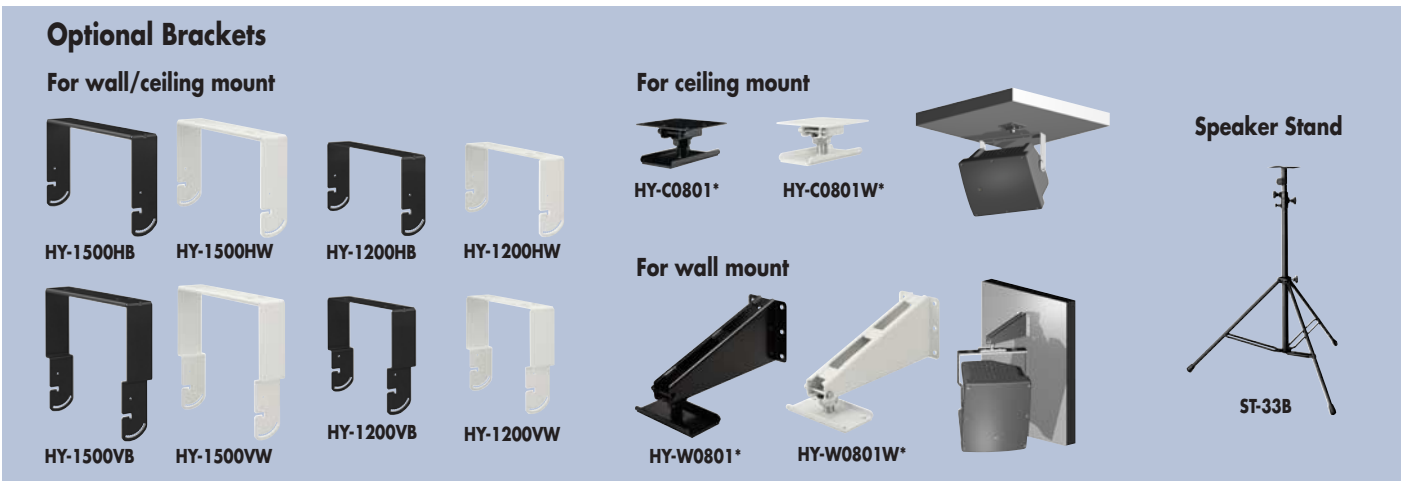

*To be used in conjunction with HY-1200/1500 Series brackets.