


## DESCRIPTION

The PE-304WU is a pendant speaker designed for the installations suspended from a ceiling. A directly-attached 5 m ( 16.4 ft) hanging wire allows the speaker to be suspended from high ceilings. The PE-304WU is driven on both high-impedance (100 V, 70 V and 25 V) and low-impedance (8 Ω) lines. The input power (impedance) can be easily changed at the upper side of the speaker. The PE-304WU is certified to UL 1480 UUMW and ULC-S541 standards. Using the supplied GRIPPLE® hangers will facilitate the speaker mounting height adjustment.

## SPECIFICATIONS

Enclosure	Bass-reflex type
Rated Input	30 W (100 V, 70 V line, 8 Ω), 3.7 W (25 V line)
Rated Impedance	100 V line: 330 Ω (30 W), 1 kΩ (10 W), 3.3 kΩ (3 W), 10 kΩ (1.3 W) 70 V line: 170 Ω (30 W), 330 Ω (15 W), 1 kΩ (5 W), 3.3 kΩ (1.5 W), 10 kΩ (0.6 W) 25 V line: 170 Ω (3.7 W), 330 Ω (1.9 W), 1 kΩ (0.6 W), 3.3 kΩ (0.2 W), 10 kΩ (0.1 W) Low impedance: 8 Ω
Dispersion (1 to 4k Hz avg.)	144° Horizontal x 144° Vertical
Sensitivity	90 dB ( 1 W, 1 m ) ( 330 Hz - 3.3 kHz, pink noise)
Frequency Response	95 Hz - 20 kHz (-10 dB)
Speaker Component	12 cm ( 5" ) cone-type + balanced dome-tweeter ( coaxial)
UL Code	UL 1480 UUMW, ULC-S541
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Finish	Enclosure: ABS resin, white (RAL 9010 equivalent) Grille: Surface-treated steel plate mesh, white ( RAL 9010 equivalent), paint
Dimensions	ø186 x 275 (H) mm (ø7.32" x 10.83") (unit only)
Weight	2 kg (4.41 lb) (unit only)
Accessory	GRIPPLE® No.1 ... 1, GRIPPLE® No.2 ... 1, Release key (for GRIPPLE®) ... 1 Safety wire (ø1.5 mm (ø0.06")) ... 1, Hanging wire (ø2 mm (ø0.08")) ... 1, Speaker Cable ( 4-core FPL listed cable 4.6 m ( 15.09 ft) ) ... 1 * GRIPPLE® No.1 and No.2 are hangers for suspending the speaker

## APPEARANCE

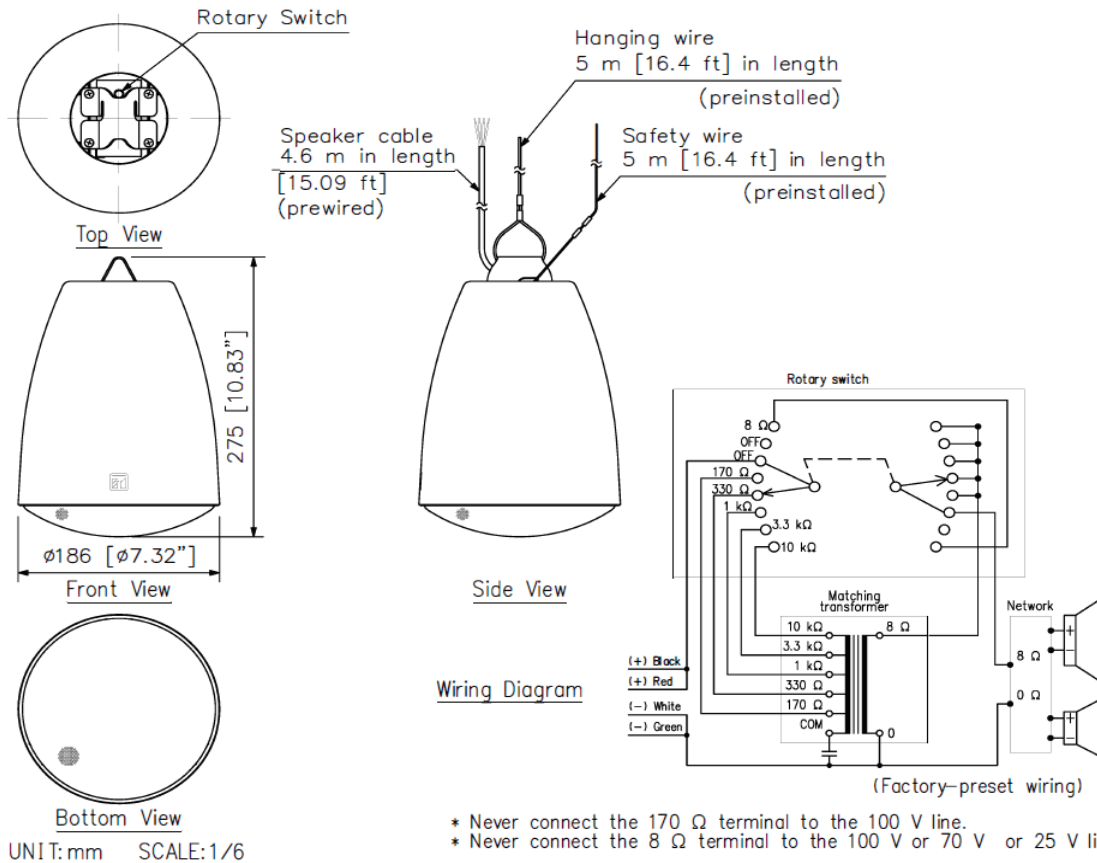

\* Never connect the 170 Ω terminal to the 100 V line.  
\* Never connect the 8 Ω terminal to the 100 V or 70 V or 25 V line.