



**SHARP / NEC**

# PX Series


Professional Installation Projectors



# Powerful installation projectors with laser-phosphor light source supports new, demanding projection applications.

## Laser Light Module

- 20,000-plus hours of virtually maintenance-free operation
- High-brightness, lower power consumption enhances applications such as retail, digital signage and theme parks
- Ability to control brightness creating a stable image over longer time periods
- Images appear immediately after power on due to instantaneous start up of the laser

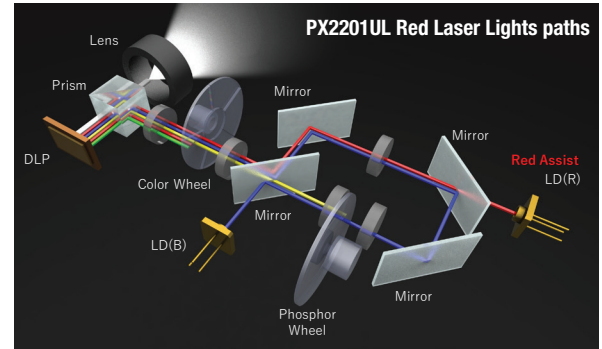

## Integrated and Powerful

- Project uncompressed FHD video with integrated HDBaseT
- High performance video processing/scaling creates life-like images
- Integrated software applications such as DisplayNote®, Crestron Roomview, AMX Beacon and PJ Link allow for complete interactivity and control

## Flexible

- Enjoy greater installation flexibility with a complete line of powered optional bayonet style lenses (5) for quick and easy exchange. Lens throw distances range from 3.3 to 137 ft
- Tilt-free installation capabilities make these projector ideal for almost any install environment, including portrait orientation
- +50%/-10% vertical lens shift and +/-30% horizontal lens shift capabilities make alignment easy




## Edge blending

This function seamlessly blends multiple projected images to display a single high-resolution image.



## Built-In HDBaseT Support

Simplify your installations with HDBaseT. Optimized for video applications and supporting uncompressed full HD digital video, audio, ethernet, power and various control signals. With only a single cable (up to 100m) to run, infrastructure and labor costs are reduced, installations are significantly easier, and there is no cable clutter to manage. With uncompressed HD video support, images have never been more stunning. What's more, control signals are contained in the same cable.

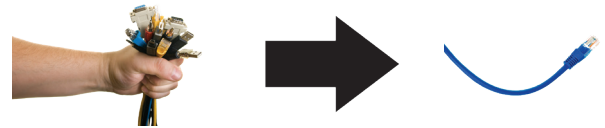


## 3D

When combined with active shutter glasses and 3D emitter, the PX Series Projectors create 3D images from a computer or Blu-ray player. The PX Series utilize the 3D sync line output from the projector to connect to the 3D emitter. Optional 3D glasses and emitters from XPAND are available from NEC.




## DisplayPort

This input provides PX Series models with expanded connectivity with advanced technology.

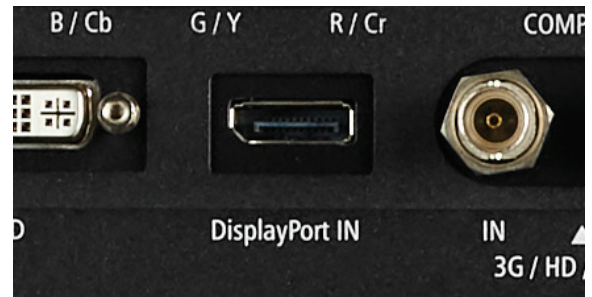

## Geometric Correction

Projecting an image isn't confined to a standard flat screen or wall with the NEC PX Series. Geometric correction allows these models to project an image on spheres, cylinders, corner angles and many more non-standard surfaces.

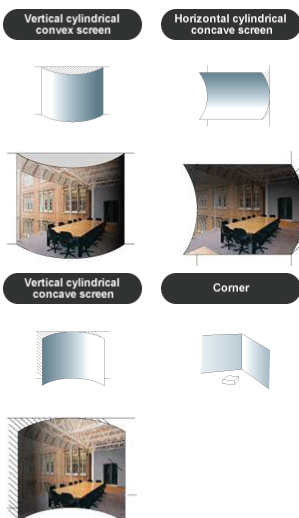


## Remote control

Wired and wireless backlit remote allows you to adjust for complete control of the projectors menu structure in a well lit or dark environment. Direct controls such as lamp mode, aspect ratio, volume and input selection eliminates multiple button pushes.



## Roll Free

When installation requirements dictate the projector needs to be placed at different angles the PX2201UL with Roll Free capabilities assures it is the correct projector of choice.

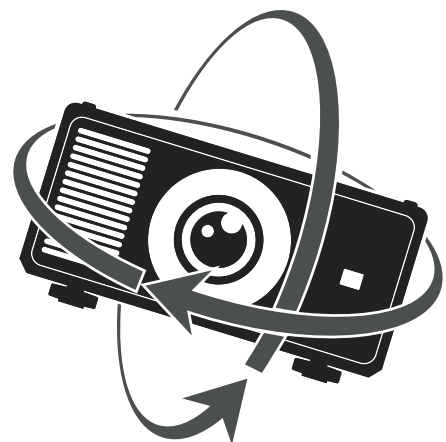

## UNIQUE FEATURES

**3D Reform™** allows you to square the image by adjusting horizontally, vertically or diagonally when the projector cannot be placed parallel or perpendicular to the screen

**Advanced AccuBlend™** ensures detailed images when non-native resolution sources are connected to the projector

**AutoSense™** automatically syncs with any computer signal and features one-touch image optimization

**64-step image magnification** with location control

**Discreet source keys** for source selection

**Remote diagnostics** enable the user to monitor and make adjustments to the projector remotely

**Built-in HTTP page** for control and monitoring over a LAN network. Email notification of error messages or lamp end-of-life can be sent to remote locations.

## WARRANTY

Registered owners receive a five (5) years or 20,000 hours (whichever comes first) parts and labor warranty including InstaCare 3 business day repair and return.

## IN THE BOX

Remote control, batteries, power cord, user's manual on CD-ROM, quick start guide, product registration card.

## ACCESSORIES

<b>IPJ2000CM</b>	Ceiling mount
<b>RMT-PJ35</b>	Replacement remote control
<b>NP01PW1</b>	Power cable
<b>RGBCBL-PJPX</b>	RGB cable
<b>Optional Lenses</b>	NP45ZL, NP46ZL, NP47ZL, NP48ZL, NP49ZL
<b>ADVEXON1-I</b>	Extends term of InstaCare service program to 2 years
<b>ADVEXON2-I</b>	Extends term of InstaCare service program to 3 years

## ORDERING MODEL NUMBERS

NP-PX2201UL



		NP-PX2201UL	
DMD Specifications		DLP (0.96" DMD)	
Light Output (lumens)		21,500 lumens	
Resolution	Native	WUXGA 1920 x 1200	
	Maximum	WQXGA 2560 x 1600	
Contrast Ratio (up to)		10,000:1 with Dynamic Black	
Lamp Life (up to)		20,000 hours	
Screen Size (diagonal)		40 to 500 in. / 1.02 to 12.7m	
Lens	Throw Ratio	NP45ZL	0.9 - 1.2:1
		NP46ZL	1.2-1.56:1
		NP47ZL	1.5-2.0:1
		NP48ZL	2.0-4.0:1
		NP49ZL	4.0-7.0:1
Projection Distance		3.3 to 247.4 ft. / 1.0 to 75.4m	
Projection Angle		10.3 to 10.8° tele / 13.7 to 14.5° wide	
Lens	Zoom Ratio	NP45ZL	1.3x
		NP46ZL	1.3x
		NP47ZL	1.3x
		NP48ZL	2.0x
		NP49ZL	1.8x
	F#, f	NP45ZL	Motorized zoom / focus, F=2.2 to 2.53, f= 19.34 to 25.76mm, 6.0 lbs. / 2.7 kg
NP46ZL		Motorized zoom / focus, F=2.18 to 2.66, f= 25.69 to 33.22mm, 4.5 lbs. / 2.0 kg	
NP47ZL		Motorized zoom / focus, F=2.17 to 2.65, f= 31.90 to 42.20mm, 4.5 lbs. / 2.0 kg	
NP48ZL		Motorized zoom / focus, F=2.17 to 2.65, f= 42.60 to 84.80mm, 6.0 lbs. / 2.7 kg	
NP49ZL		Motorized zoom / focus, F=2.2 to 2.57, f= 83.93 to 146.85mm, 4.5 lbs. / 2.0 kg	
Lens Shift**		+50/-10% Vertical, +/-30% Horizontal	
Shutter		Laser Shutter	
Keystone Correction		+/- 60° horizontal, +/- 40° vertical	
Synchronization Range	Horizontal	Analog: 15-100kHz, Digital: 15-153kHz	
	Vertical	Analog: 48-120Hz, Digital: 24-120Hz	
Supported Video Standards		NTSC, NTSC4.43, PAL, PAL-60, PAL-M, PAL-N, SECAM	
SD/HD Video Signal Compatibility		480i, 480p, 576i, 576p, 720p, 1080i, 1080p	
PC Signal Compatibility		VGA, SVGA, XGA, SXGA, SXGA+, UXGA, WUXGA	
Macintosh Compatibility		Yes	
Input Terminals	RGB1 (analog)	VGA 15 pin D-sub, Component video using ADP-CV1E adapter	
	RGB2 (digital)	HDMI (V2.0) w/HDCP (V1.4/2.2)	
	RGB3 (digital)	HDMI (V2.0) w/HDCP (V1.4/2.2)	
	RGB4 (digital)	DisplayPort w/HDCP (V1.4)	
	RGB5 (digital)	DVI-D w/HDCP (V1.4/2.2)	
	RGB6 (digital)	HDBaseT w/HDCP (V1.4/2.2)	
	RGB7 (digital)	3G-SDI	
Output Terminals	Monitor Out	VGA 15 pin D-sub	
External Control		RS-232, IR, DDC/CI	
Sync Compatibility		Separate Sync / Composite Sync / Sync on G	
Power Requirements		200-240V AC, 50/60 Hz	
Input Current		9.4A	
Power Consumption			
(ECO off/ECO Mode/Standby/Standby-Power Saving)		1775W / 1343W / 5W / 0.5W	
Installation Orientation		Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear	
Product Dimensions (WxDxH)		20.9 x 10.8 x 29.4 in. / 530 x 275 x 748 mm	
Net Weight		112.4 lbs. / 51 kg	
Shipping Dimensions (WxDxH)		30.7 x 19.2 x 38.9 in. / 779 x 488 x 977 mm	
Gross Weight		146 lbs. / 66 kg	
Fan Noise		48 dB normal / 46 dB eco	
Regulations		USA UL60950-1: 2nd edition, 2014, FCC Part15 Subpart B(ANSI C63.4:2014), CAN/CSA C22.2 No.62368-1-14, 2nd Edition, 2014, ICES-003 Issue6(ANSI C63.4:2014)	
Operating Temperature		41-104°F / 5-40°C	
Humidity		20-80% non-condensing	
Ordering Model Number		NP-PX2201UL	

\* Lens does not ship with the projector. Additional accessories are available, including screens, carts, mount accessories and replacement cables. Visit [www.necdisplay.com](http://www.necdisplay.com) for details.



HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change.