

# SS-704 Microphone




The SS-704 is an omni-directional line level microphone housed in a weather resistant enclosure. The microphone picks up sounds from approximately 12 feet away and is compatible with IP cameras and DVRs featuring a live level audio input. Cabling can be connected through either the top or rear of the enclosure via 3/4" threaded conduit. A 3 pin terminal block is enclosed in the housing for connections to 12Vdc power and IP cameras or DVRs.

## Product Features

- Line level audio output for near universal compatibility
- Weather resistant enclosure for outdoor applications
- Can be installed up to 1,000 feet away from an IP camera or DVR
- Includes RCA and 3.5mm wire adapters for faster installation

## Product Specs

<b>FREQUENCY RESPONSE:</b> 100Hz - 10kHz	<b>SIGNAL TO NOISE RATIO:</b> 70dB
<b>SENSITIVITY(1M,1W):</b> -30dB	<b>OUTPUT IMPEDANCE:</b> 600 Ohms
<b>POWER REQUIREMENTS:</b> 15mA @ 12VDC	<b>DIMENSIONS:</b> 2.8"w 4.6"h 2.2"d
<b>WEIGHT:</b> 12oz	<b>OPERATING TEMP RANGE:</b> -20C - +60C

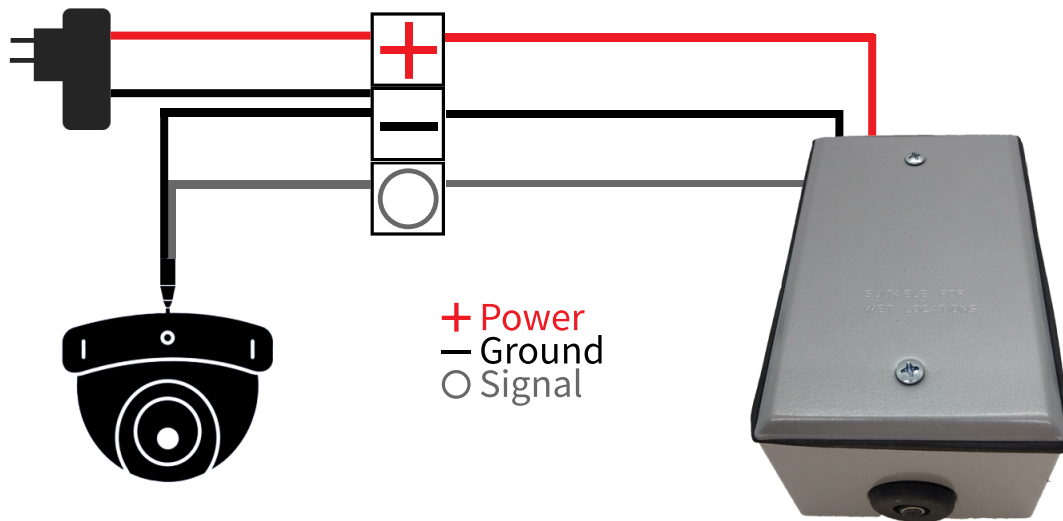

## INSTALLATION INSTRUCTIONS

To Connect the SS-704 Microphone to an IP Camera or DVR:

- 1) Using 18/2 or 22/2 gauge shielded cable, connect the microphone ground terminal “-” and the audio signal terminal “O” to the included RCA or 3.5mm adapter.
- 2) Insert the connector to the audio input of the camera or DVR.
- 3) Connect 12Vdc power by using the positive terminal “+” and the ground terminal marked “-”.

Assembled in the USA with Imported Parts