


Shaded Information = NEW 3000K Color Temperature Lamps

Lamp Code	Beam from Fixture		Halogen Equiv.	Lamp Body Color Code	Voltage Input	Color Temp. CCT/CRI	Amps	Power Factor	Volt Amp (to size)	Factory Lumen	Lumen Output Enclosed Fixture	Rated Hrs.
SLMR166XXW27	XX-Wide	80°	75 Watt	WHITE 6 Watt	10-24 VAC	2700°K/ 83 CRI	0.706	0.717	8.49	720	213	50,000
SLMR166XW27	X-Wide	55°					0.706	0.717	8.49		440	
SLMR166W27	Wide	40°					0.706	0.717	8.49		527	
SLMR166M27	Medium	30°					0.706	0.717	8.49		559	
SLMR166N27	Narrow	20°				3000°K/ 83 CRI	0.762	0.681	9.16	534		
SLMR166W30	X-Wide	55°					0.745	0.677	9.0	557		
SLMR166W30	Wide	40°										
SLMR165XXW27	XX-Wide	80°	50 Watt	BLACK 5 Watt	10-24 VAC	2700°K/ 83 CRI	0.542	0.7	6.56	540	175	50,000
SLMR165XW27	X-Wide	55°					0.542	0.7	6.56		392	
SLMR165W27	Wide	40°					0.542	0.7	6.56		419	
SLMR165M27	Medium	30°					0.542	0.7	6.56		421	
SLMR165N27	Narrow	20°				3000°K/ 83 CRI	0.671	0.658	7.45	426		
SLMR165W30	X-Wide	55°					0.608	0.658	7.34	456		
SLMR165W30	Wide	40°										
SLMR164XXW27	XX-Wide	80°	35 Watt	BLUE 4 Watt	10-24 VAC	2700°K/ 83 CRI	0.387	0.691	4.67	390	199	50,000
SLMR164XW27	X-Wide	55°					0.387	0.691	4.67		299	
SLMR164W27	Wide	40°					0.387	0.691	4.67		304	
SLMR164M27	Medium	30°					0.387	0.691	4.67		305	
SLMR164N27	Narrow	20°				3000°K/ 83 CRI	0.435	0.637	6.0	310		
SLMR164W30	X-Wide	55°					0.435	0.65	5.26	322		
SLMR164W30	Wide	40°										
SLMR162XXW27	XX-Wide	80°	20 Watt	GREEN 2 Watt	10-24 VAC	2700°K/ 83 CRI	0.236	0.664	2.83	300	128	50,000
SLMR162XW27	X-Wide	55°					0.236	0.664	2.83		183	
SLMR162W27	Wide	40°					0.236	0.664	2.83		189	
SLMR162M27	Medium	30°					0.236	0.664	2.83		193	
SLMR162N27	Narrow	20°				3000°K/ 83 CRI	0.249	0.64	3.0	167		
SLMR162W30	X-Wide	55°					0.23	0.66	3.0	197		
SLMR162W30	Wide	40°										
SLMR161XXW27	XX-Wide	80°	10 Watt	RED 1 Watt	10-24 VAC	2700°K/ 83 CRI	0.139	0.63	1.69	240	74	50,000
SLMR161XW27	X-Wide	55°					0.139	0.63	1.69		106	
SLMR161W27	Wide	40°					0.139	0.63	1.69		104	

Lamp Packaging: 1 Lamp Per Box, 10 Lamps Per Pack, 10 Packs Per Master Carton. Patents Pending.

Most Popular Applications

- Uplighting 10-20ft. Trees: **Green 40° Wide Lamp**
- Uplighting 20-30ft. Trees: **Blue 30° Medium Lamp**
- Uplighting 30-40ft. Trees: **Black 30° Medium Lamp**
- Uplighting 40+ ft.: **White 30° Medium Lamp**
- Uplighting 30-40ft. Palm Tree: **White 20° Narrow Lamp**
- Uplighting Columns/Architecture: **Green 20° Narrow Lamp**
- Moon Lighting: **Blue 55° X-Wide Lamp**
- Grazing/ Two Story House Facade: **Blue 30° Medium Lamp**
- Wall Washing / 10 ft. or lower plant material / MR-16 Area Light: **Red 80° XX-Wide Lamp**
- Technique: Shadowing: **Blue 40° Wide Lamp**

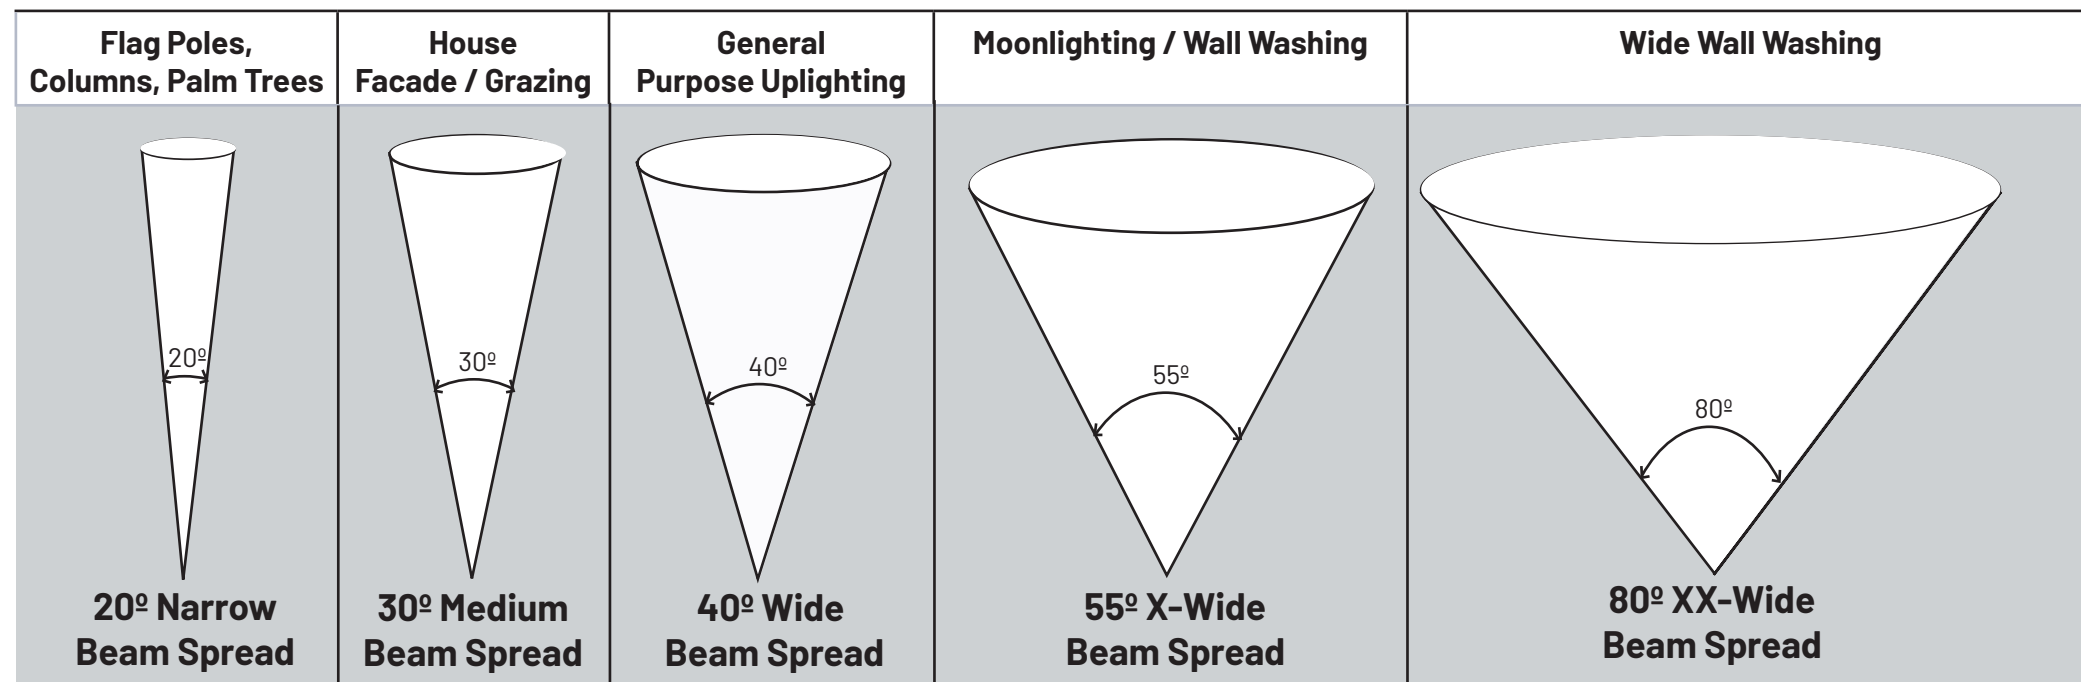

Mini LED Lamps

<p>3156 S8 Wedge Base LED • 2.5 Watts, 9 - 20 Volt operating range • 250 Lumen, Color Temp. 2750°K • IP67 Rated, 25,000 Hrs.</p> <p>SL3156250L</p>	<p>GY6.35 Bi-Pin Base LED • 2.5 Watts, 9 - 20 Volt operating range • 250 Lumen, Color Temp. 2750°K • IP67 Rated, 25,000Hrs.</p> <p>SLBP250L</p>	<p>Single Contact Bayonet LED • 2.5 Watts, 9 - 20 Volt operating range • 250 Lumen, Color Temp. 2750°K • IP67 Rated, 25,000Hrs.</p> <p>SLSCB250L</p>	<p>921 T5 Wedge Base LED • 2.5 Watts, 9 - 15 Volt operating range • 200 Lumen, Color Temp. 2750°K • IP67 Rated, 25,000Hrs.</p> <p>SL921T5200L</p>
---	--	---	--

Note:
All Lamps tested in the MR-16 Bullet Light (SBL20).
3rd Party tested lumens and beam spreads.
Tested at 12 V A/C. Test results available online.
Ambient Operating Temp. Range -30°C to +45°C (-22°F to 113°F).

