

PSC-1 Standard Light Proximity Card

For use with Pyramid Series Proximity Readers

- Wallet friendly - thinner than other comparable proximity cards
- Extremely durable
- Works with Keri's new Pyramid Series Proximity Readers on any manufacturer's system
- Interchangeable in system with Multi Technology Cards and Key Tags
- Industry standard formats
- Unique ID codes
- Lifetime warranty



Keri's *PSC-1 Standard Light Proximity Card* provides maximum read range performance in a package considerably thinner than other "clamshell" proximity cards. It can be easily carried in a wallet or purse or worn on the clothing with a clip or necklace.

The cards are extremely durable, in fact they come with a lifetime warranty. They are for use with Keri's new **Pyramid Series Proximity Readers** which can be used on any manufacturer's access control system. They are manufactured with a vertical hanging slot punch and can have an optional horizontal slot punch added.

The cards are sequentially encoded, and can be programmed in any custom Wiegand format as well as standard 26 bit, all with exact number sequences. Card ID numbers are permanently marked on the card. They can be used interchangeably with Keri's MultiTechnology Cards or Key Ring Tags on the same system without worry about ID code duplication or format matching of readers. It can accept standard imageable PVC labels from a multitude of vendors for graphics customization and photo ID. Unless the user requires the combination of mag stripe and proximity, the Standard Card is recommended over the MultiTechnology Card whenever possible because of its lower cost and lifetime warranty.

DATA SHEET

PSC-1 Standard Light Proximity Card



1530 Old Oakland Road, Suite 100
San Jose, CA 95112 USA
(800) 260-5265 • (408) 451-2520 • Fax (408) 441-0309
e-mail: sales@kerisys.com web: www.kerisys.com

PSC-1 Standard Light Proximity Card

For use with Pyramid Series Proximity Readers

Specifications

Read Range*

P-300	up to 4 inches (102mm)
P-400	up to 1 inch (25mm)
P-500	up to 5 inches (127mm)
P-600	up to 4 inches (102mm)

Readers with more range available soon

Size

L=3.375, W=2.150, T=0.059 inches
Approx. (86 x 55 x 1.5mm)

Weight

0.31 oz
(8.8g)

Material

ABS

Frequency

125 KHz excitation

Temperature

-40° C to +70° C

Humidity

0-95% Non-condensing

Color



Off white

Formats

Wiegand and ABA Track II magnetic stripe (clock and data)

Warranty

The Standard Light Proximity Card comes with a limited lifetime warranty against defects in materials and workmanship.

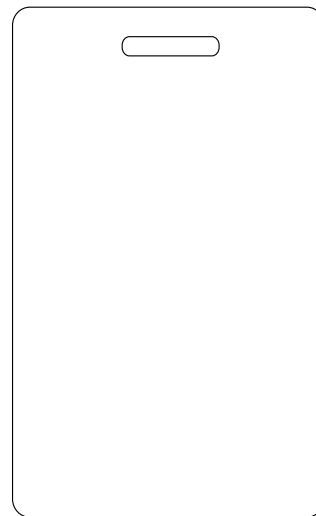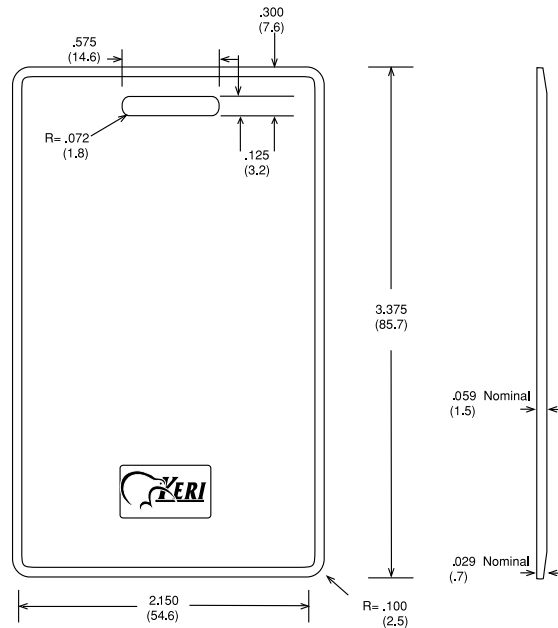

Dimensions in inches (mm)

Specifications subject to change without notice.

* Read range is stated in a clean RF and electrical environment with card presented parallel to reader surface.

All other trademarks are the property of their respective owners.

This document also serves as the data sheet for the KC-10X and KC-26X.

Presented By:



(800) 260-5265 • (408) 451-2520 • Fax (408) 441-0309

Sept. 1999