




2-Port Industrial Outdoor Gigabit PoE++ Extender

TI-BE200 (v1.0R)

- Easy installation
- Extends PoE++ 100m for a total distance of up to 200m (656 ft.)
- Daisy chain up to 4 units for a total PoE network extension of up to 500m (1,640 ft.)*
- Use a single PoE++ connection to extend PoE for up to two devices
- Supports PoE (15.4W), PoE+ (30W), PoE++ (60W) devices
- Wide operating temperature range of -40°– 75° C (-40° – 167° F)
- IP67 outdoor weather rated housing
- No external power adapter required
- Built-in True Surge 6kV Protection
- Wall mountable
- NDAA / TAA compliant (U.S. and Canada only)


TRENDnet's 2-Port Industrial Outdoor Gigabit PoE++ Extender, model TI-BE200, takes a single PoE++ (90W) connection and extends it an additional 100 meters (328 ft.) for up to two PoE+ devices. The industrial outdoor PoE++ extender auto-detects a PoE (15.4W), PoE+ (30W), or PoE++ (60W) signal, and extends it for a total distance of up to 200 meters (656 ft.) from the PoE source. Daisy chain up to four outdoor PoE++ extenders together for a total PoE network extension of up to 500 meters (1,640 ft.). This industrial PoE++ extender features a single PoE++ input port and two PoE+ output ports encased in an IP67 weather rated housing.

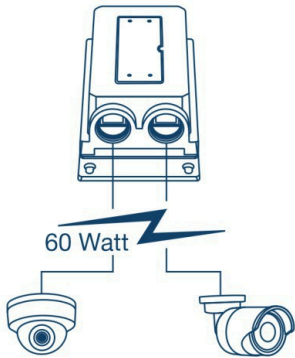

PoE++ Power

Extends a PoE++ (90W) connection up to 100 meters (328 ft.) to PoE (15.4W), PoE+ (30W), and PoE++ (60W) devices.

**



Gigabit Ports


Features one gigabit PoE++ input port and two gigabit PoE+ output ports that extend a single PoE++ connection an additional 100 meters (328 ft.) to two PoE+ devices.



Outdoor Rated

Built for outdoor and industrial environments, with an IP67 weather rated metal housing and an operating temperature range of -40° – 75° C (-40° – 167° F).

NETWORKING SOLUTION

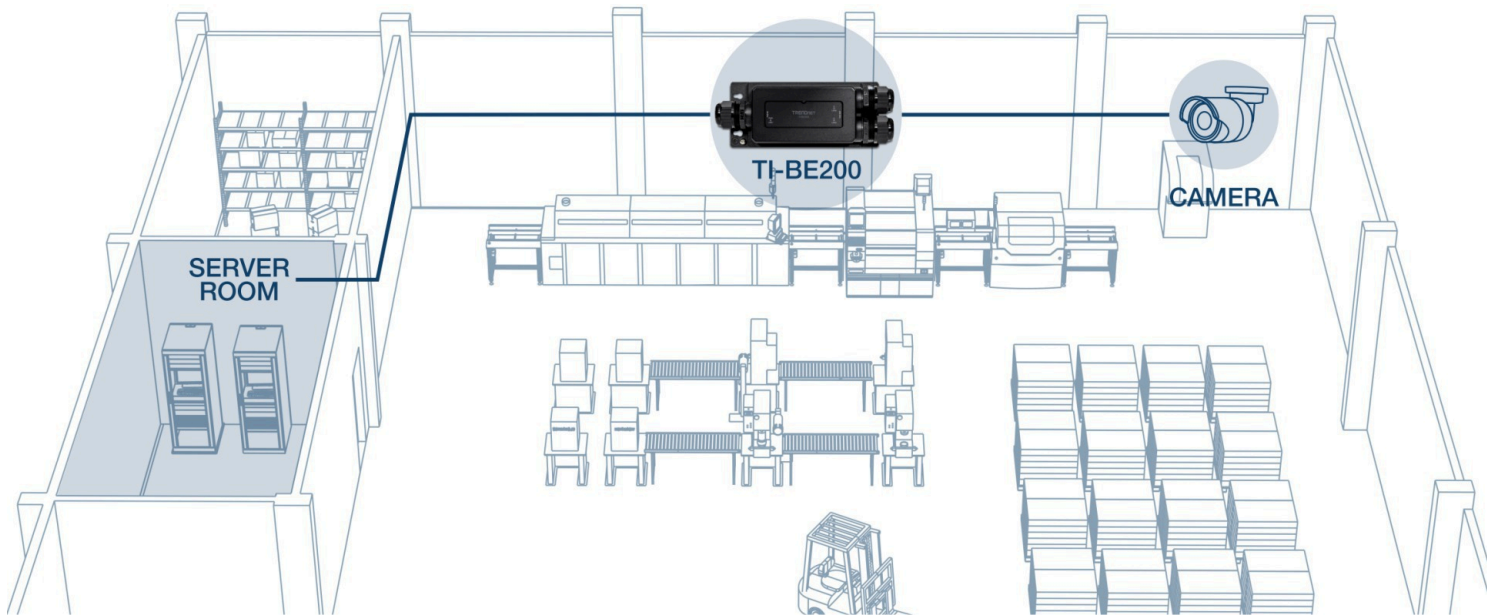

FEATURES



Extension Distance

Extends a PoE, PoE+, or PoE++ network connection an additional 100 meters for a total distance of up to 200 meters (656 ft.) from the PoE source



PoE/PoE+/PoE++

The industrial PoE++ extender conveniently auto detects PoE (15.4W), PoE+ (30W), and PoE++ (60W) network connections



Gigabit Ports

1 x Gigabit PoE++ input port, 2 x Gigabit PoE++ output ports, with a 60W PoE budget and a 90W PoE++ input



Daisy Chain

Connect up to 4 outdoor PoE++ repeaters for a total PoE network extension of up to 500m (1,640 ft.)*




PoE Powered

No external power required—saves installation time and cost



Outdoor Ready

The outdoor PoE++ extender features a rugged IP67 outdoor weather rated metal housing

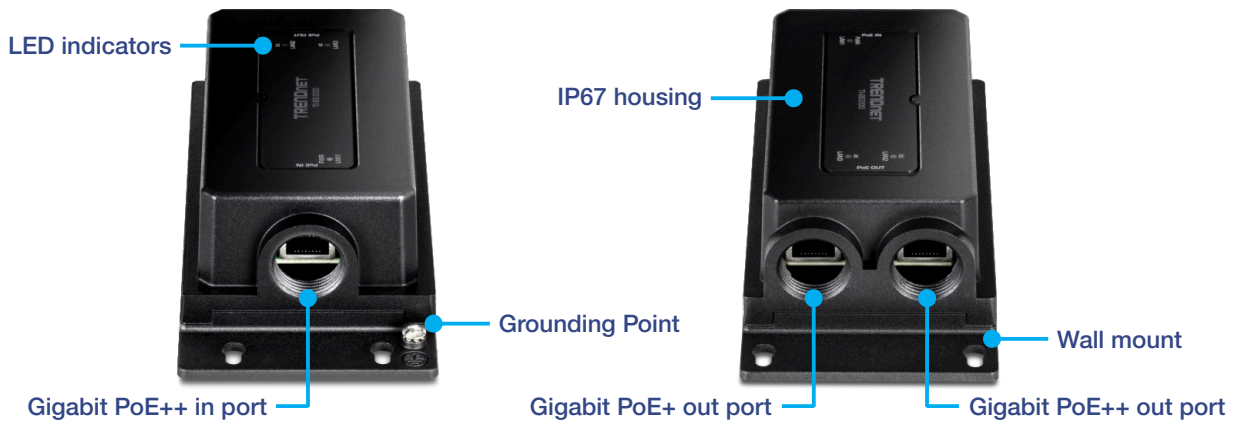

SPECIFICATIONS

Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3x
- IEEE 802.3ab
- IEEE 802.3af
- IEEE 802.3at
- IEEE 802.3bt

Device Interface

- 1 x Gigabit PoE++ in port
- 1 x Gigabit PoE++ out port
- 1 x Gigabit PoE+ out port
- LED indicators
- Wall mount
- IP67 housing

Data Transfer Rate

- Ethernet: 10Mbps (half duplex), 20Mbps (full duplex)
- Fast Ethernet: 100Mbps (half duplex), 200Mbps (full duplex)
- Gigabit: 2000Mbps (full duplex)

Performance

- RAM buffer: 1Mb
- MAC Address Table: 2K entries
- Jumbo Frame: 9KB

Special Features

- Extends a PoE/PoE+ network connection an additional 100 meters for a total distance of up to 500m (1,640 ft.)
- Cascade up to 4 repeaters

Power

- Powered by PoE++ (60W – 90W) Device
- Max. consumption: 2.8W (without device connected)

PoE

- PoE budget: 60W
- PSE Pin: 1,2 (V-), 3,6 (V+), 4,5 (V+), 7,8 (V-)

PoE Power Output

| PoE Input | Max PoE Output |
|-----------|----------------|
| 90W | 60W |
| 60W | 51W |
| 30W | 25W |

Single Port Daisy Chain

| Daisy Chains From PSE | Max. PoE Output |
|-----------------------|-----------------|
| 1 (up to 100m) | 90W Input: 60W |
| | 60W Input: 51W |
| | 30W Input: 25W |
| 2 (up to 200m) | 90W Input: 34W |
| | 60W Input: 33W |
| | 30W Input: 22W |
| 3 (up to 300m) | 90W Input: 17W |
| | 60W Input: 16W |
| | 30W Input: 14W |
| 4 (up to 400m) | 90W Input: 9W |
| | 60W Input: 8W |
| | 30W Input: 6W |

Operating Temperature

- - 40° – 75° C (-40° – 167° F)

Operating Humidity

- Max. 95% non-condensing

Dimensions

- 167 x 74 x 44mm (6.6 x 2.9 x 1.7 in.)

Weight

- 364g (12.8 oz.)

Certifications

- CE
- FCC
- IEC 61000-4-2
- IEC 61000-4-4
- IEC 61000-4-5
- IEC 60068-2-27 (Shock)
- IEC 60068-2-32 (Free Fall)
- IEC 60068-2-6 (Vibration)

Warranty

- 3 year

Package Contents

- TI-BE200
- Quick Installation Guide
- 3 x IP67 weather rated cable glands
- Wrench
- Wall mount screws

* Each additional extender added to the daisy chain will decrease the overall available PoE budget.

** To obtain the maximum PoE budget of 60W, the outdoor PoE++ extender must be powered by a 90W PoE++ device.

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.