

PRODUCT DESCRIPTION

Use the Gigabit PoE Injector to expand network connectivity to areas where there are no power outlets. Connect an IP device utilizing a single Ethernet cable for both data transfer and power supply.

FEATURES

- **2 adaptive gigabit Ethernet ports:**
 - 1 x Gigabit Data IN port
 - 1 x Gigabit Data + PoE OUT port
- **Supports PoE power up to 15.4 watts for PoE port**
- **Supports 10/100/1000 Base-T applications**
- **Port status LED indicator**
- **Internal power supply**
- **Corresponding power cord included**
- **Full IEEE 802.3af/at compliance**
- **36-Month Warranty**



SPECIFICATIONS

PART #	0E-15WPOEINJ
UPC	840049303379
INPUT POWER	100-240 VAC
OUTPUT POWER	54VDC 15.4W
DIMENSIONS (L x W x H)	4.76" x 2" x 1.4" (121 x 50 x 36mm)
WEIGHT	0.66 lbs. (0.3kg)



DESCRIPTION DU PRODUIT

Utilisez l'injecteur Gigabit PoE pour étendre la connectivité de votre réseau aux endroits où il n'y a aucune prise électrique. Connectez un appareil IP en utilisant un seul câble Ethernet pour le transfert de données et pour l'alimentation.

CARACTÉRISTIQUES

- **2 ports Ethernet Gigabit adaptatifs :**
 - 1 x port d'entrée Gigabit de données
 - 1 x port de sortie Gigabit PoE et de données
- **Prise en charge de l'alimentation PoE jusqu'à 15.4 W pour les ports PoE**
- **Prend en charge les applications 10/100/1000 Base-T**
- **Témoin à DEL d'état de port**
- **Bloc d'alimentation interne**
- **Cordon d'alimentation inclus**
- **Conformité complète IEEE 802.3af/at**
- **Garantie de 36 mois**



SPÉCIFICATIONS


NUMÉRO DE PIÈCE	0E-15WPOEINJ
UPC	840049303379
PUISSANCE D'ENTRÉE	100 à 240 VCA
PUISSANCE DE SORTIE	54 VCC, 15.4 W
DIMENSIONS (L x l x H)	121 x 50 x 36 mm (4,76 x 2 x 1,4 po)
POIDS	0,66 lb (0,3 kg)




ADDITIONAL SPECIFICATIONS

NO. OF CHANNELS	1 x Gigabit Data IN port	
	1 x Gigabit Data + Power OUT port	
PASS THROUGH DATA RATES	10/100/1000 Mbps	
INPUT POWER	Input Voltage	100-240 VAC
	Frequency	50 to 60 Hz
OUTPUT POWER	PoE Budget	15.4W max
	Output Power Voltage	54VDC
	Output Current	285 mA
	PoE Pin Assignment	V+(RJ45 pin 1,2), V-(RJ45 pin 3,6)
LED INDICATORS	Green	AC Power Input
	Red	Power+Data Output
ENVIRONMENT	Working Temperature	0 ~ 40°C (32 ~ 104°F)
	Storage Temperature	-40 ~ 70°C (-40 ~ 158°F)
	Humidity Non-Condensing	0 ~ 85%
MECHANICAL	Dimensions (L x W x H)	4.76" x 2" x 1.4" (121 x 50 x 36mm)
	Color	Black
CONNECTORS	Shielded RJ45, EIA 568A and 568B	
PROTECTION	Overcurrent protection	
	Overload protection	
	Overvoltage protection	
	Anti-interference protection	


PHYSICAL INTERFACE



AC Socket
Connect with AC cable.

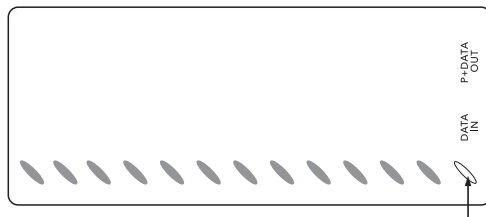

A steady green light indicates that the PoE+ Injector has 100-240V power input.
A steady red light indicates that P+DATA port is powered up.



P+DATA OUT:
Connect to PD (IP camera, access point, etc.) with UTP cable to supply power and transfer data.

DATA IN:
Connect to Ethernet device (network switch, router, etc.) with CAT5 UTP cable for data transfer.