

# 26 Port Gigabit PoE Switch

24 Port PoE + 2 Shared Uplinks (RJ45 or SFP)

0E-24PRJ45FG

**UltraTech**  
POWER PRODUCTS

## PRODUCT DESCRIPTION

The 26 Port Gigabit PoE Switch is fully integrated to support security monitoring, providing high-performance packet forwarding and gigabit Ethernet transfer rates. Adaptive ports use the appropriate bandwidth to ensure clear images and smooth transmission for any application, including high definition video recording or streaming.

## FEATURES

- **26 adaptive gigabit Ethernet ports:**
  - 24 x PoE ports (RJ45)
  - 2 x Shared Gigabit Uplinks (RJ45 or SFP)
- **Quick setup, with plug and play**
- **52 Gbps switching capacity**
- **370W PoE budget**
- **Port status LED indicator**
- **Internal power supply**
- **6kV surge protection**
- **19" Rack mountable housing**
- **Standard: 802.3/802.3u/802.3ab/802.3af/at compliant**
- **Limited Lifetime Warranty**



## SPECIFICATIONS

<b>PART #</b>	<b>0E-24PRJ45FG</b>
<b>UPC</b>	840049305137
<b>INPUT POWER</b>	100-240 VAC
<b>TRANSMISSION DISTANCE</b>	328 ft. (100m)*
<b>MAC ADDRESS TABLE</b>	8K
<b>SWITCHING CAPACITY</b>	52 Gbps
<b>DIMENSIONS (L x W x H)</b>	17.3" x 7.8" x 1.7" (440 x 200 x 44mm)
<b>WEIGHT</b>	8.2 lbs. (3.7kg)

\*SFP transmission distance varies based on module used with device



FOR MORE INFORMATION, CONTACT TECH SUPPORT: 1.833.574.9124

# Commutateur PoE Gigabit à 26 ports

24 ports PoE + 2 ports Gigabit Uplink partagés (RJ45 ou SFP)

0E-24PRJ45FG

**UltraTech**  
POWER PRODUCTS

## DESCRIPTION DU PRODUIT

Le commutateur PoE Gigabit à 26 ports permet une surveillance de la sécurité intégrée. Il offre une transmission de paquets à haute performance et une vitesse de transfert Gigabit rapide. Les ports actifs utilisent la bande passante appropriée pour des images limpides et une transmission efficace, peu importe l'application, y compris l'enregistrement et la diffusion vidéo haute définition.

## CARACTÉRISTIQUES

- **26 ports Ethernet Gigabit adaptatifs**
  - 24 ports PoE (RJ45)
  - 2 ports Gigabit Uplink partagés (RJ45 ou SFP)
- **Configuration facile prête à l'emploi**
- **Capacité de commutation de 52 Go/s**
- **Puissance PoE totale de 370 W**
- **Indicateur à DEL d'état des ports**
- **Bloc d'alimentation interne**
- **Parasurtenseur à 6 kV**
- **Boîtier de 19" montable sur baie**
- **Normes : Conformité 802.3/802.3u/802.3ab/802.3af/802.3at**
- **Garantie à vie limitée**



## SPÉCIFICATIONS

NO DE PIÈCE	0E-24PRJ45FG
CUP	840049305137
PUISSANCE D'ENTRÉE	100 à 240 VCA
DISTANCE DE TRANSMISSION	328 pi (100 m)*
TABLE D'ADRESSES MAC	8K
CAPACITÉ DE COMMUTATION	52 Go/s
DIMENSIONS (L x l x H)	17,3 x 7,8 x 1,7 po (440 x 200 x 44 mm)
POIDS	8,2 lb (3,7 kg)

\*La distance de transmission SFP varie en fonction du module utilisé avec l'appareil



# 26 Port Gigabit PoE Switch

24 Port PoE + 2 Shared Uplinks (RJ45 or SFP)




## ADDITIONAL SPECIFICATIONS

<b>POWER</b>	Power Supply	Built-in Power Supply	
	Input Voltage	100-240 VAC	
	Output Voltage	52 VDC	
	PoE Power Budget	370W for PoE	
<b>ETHERNET</b>	Speed	Ports 1 to 24: 10/100/1000 Mbps Ports 25 to 26: Shared Gigabit Ports (RJ45 or SFP)	
	Transmission Distance	RJ45: 328 ft. (100m) SFP: Transmission distance varies with type of SFP module used. (Module not included).	
<b>NETWORK SWITCH</b>	Ethernet Standard	IEEE 802.3/802.3u/802.3ab/802.3af/at	
	Switching Capacity	52 Gbps	
	Transfer Rate	14,880 pps for 10 Mbps 148,800 pps for 100 Mbps 1,488,000 pps for 1000 Mbps	
	MAC Address Table	8K MAC	
<b>LINK/ACT INDICATOR</b>	On	Green	Port connecting
	Blinks	-	Port receiving or transmitting data
	Off	-	Port is not successfully linked to device
<b>PoE</b>	On	Green	PD is connected
	Off	-	No PD is connected or power forwarding failed
	PoE PIN assignment	V+(RJ45 Pin 1,2), V-(RJ45 Pin 3, 6)	
<b>WORKING ENVIRONMENT</b>	Working Temperature	0 ~ 40°C (32 ~ 104°F)	
	Storage Temperature	-40 ~ 70°C (-40 ~ 158°F)	
	Humidity Non-Condensing	0 ~ 85%	
<b>MECHANICAL</b>	Dimensions (L x W x H)	17.3" x 7.8" x 1.7" (440 x 200 x 44mm)	
	Color	Black	

## PHYSICAL INTERFACE

Front

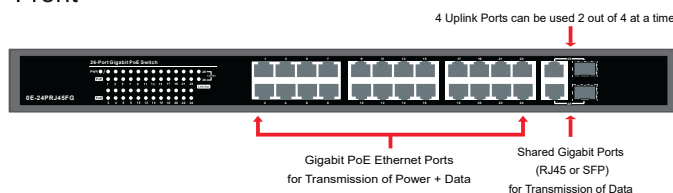

Back



FOR MORE INFORMATION, CONTACT TECH SUPPORT: 1.833.574.9124