

1500VA Battery Backup

Line-Interactive Mini-Tower UPS

0E-1500V10RD

UltraTech
POWER PRODUCTS

PRODUCT DESCRIPTION

A mini-tower UPS with line interactive topology, the UltraTech 0E-1500V10RD provides battery backup and surge protection for desktop computers, workstations, network devices, and home entertainment systems. The 0E-1500V10RD uses Automatic Voltage Regulation (AVR) to correct minor power fluctuations without switching to battery power, which extends battery life and is essential in areas where power fluctuations occur frequently.

FEATURES

- **10 Surge Protected, Grounded Outlets:**
 - 8 standard sized outlets, 4 with battery backup
 - 2 transformer sized outlets, 1 with battery backup
- **Automatic Voltage Regulator**
- **HID Compliant USB Connectivity Port**
- **EMI and RFI Filtration**
- **Simulated Sine Wave Output**
- **LCD Display**
- **PowerPanel® Personal Software for Remote Monitoring and Management**



SPECIFICATIONS

PART #	0E-1500V10RD
UPC	811914023166
CAPACITY	1500VA / 900W
OUTPUT	120 VAC +/- 5%
CORD LENGTH	6 ft. (1.8m)
OUTLET TYPES	10 x NEMA 5-15R
RUNTIME (HALF/FULL)	12 minutes / 3 minutes
DIMENSIONS	3.9 x 11 x 14 in. (99 x 279 x 356mm)
WEIGHT	25 lbs. (11.348kg)
WARRANTY	24 months
CONNECTED EQUIPMENT GUARANTEE	\$500,000

TYPICAL APPLICATIONS

- **Desktop Computers**
- **Workstations**
- **Home Theater Equipment**
- **Personal Electronics**
- **Home Networking**
- **Routers & Modems**
- **VoIP Phone Systems**



Batterie de secours de 1500VA

ASI en attente active sur mini-tour

0E-1500V10RD

UltraTech
POWER PRODUCTS

DESCRIPTION DU PRODUIT

Le UltraTech 0E-1500V10RD, une ASI en attente active sur mini-tour, offre une alimentation de secours et une protection contre les surtensions pour les ordinateurs de bureau, les postes de travail, les appareils réseau et les systèmes audiovisuels domestiques. Le 0E-1500V10RD utilise la régulation automatique de la tension (AVR) pour corriger les fluctuations électriques mineures sans passer à l'alimentation de la batterie, ce qui permet de prolonger la durée de vie de la batterie, un élément essentiel dans les endroits où les fluctuations électriques sont courantes.

CARACTÉRISTIQUES

- **10 prises protégées contre les surtensions et mises à la terre:**
 - 8 prises de taille standard, 4 avec alimentation de secours
 - 2 prises de taille transformateur, 1 avec alimentation de secours
- **Régulateur automatique de tension (AVR)**
- **Port de connectivité USB conforme à la norme HID**
- **Filtration EMI et RFI**
- **Sortie d'onde sinusoïdale simulée**
- **Écran ACL**
- **Logiciel PowerPanel® Personal pour la surveillance et la gestion à distance**



SPÉCIFICATIONS

No de PIÈCE	0E-1500V10RD
UPC	811914023166
CAPACITÉ	1500VA / 900W
PUISSANCE	120 VCA +/- 5%
LONGUEUR DU CORDON	6 pi (1,8m)
TYPES DE PRISES	10 x NEMA 5-15R
AUTONOMIE (MOITIÉ/PLEINE CHARGE)	12 minutes / 3 minutes
DIMENSIONS	3,9 x 11 x 14 po (99 x 279 x 356mm)
POIDS	25 lb (11,348kg)
GARANTIE	24 mois
GARANTIE SUR L'ÉQUIPEMENT CONNECTÉ	500 000\$

APPLICATIONS CLASSIQUES

- **Ordinateur de bureau**
- **Postes de travail**
- **Système de cinéma maison**
- **Systèmes électroniques personnels**
- **Réseau domestique**
- **Routeurs et modems**
- **Systèmes téléphoniques VoIP**




1500VA Battery Backup

Line-Interactive Mini-Tower UPS



Multifunction LCD

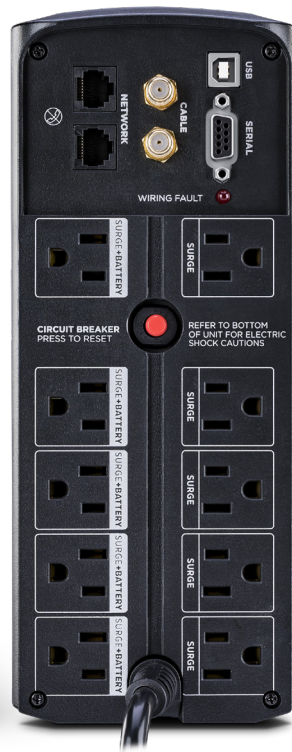

USB & Serial Connectivity Ports
Broadband Network / Modem / DSL Protection
COAX / Cable / DSS Surge Protection

2 Transformer Sized Outlets,
1 with Battery Backup

5 Battery + Surge Protected Outlets

5 Surge Protected Outlets

ADDITIONAL SPECIFICATIONS

INPUT	Circuit Breaker	15A
	Cord Length	6 ft. (1.8m)
	Input Frequency Range	57 Hz-63 Hz
	Nominal Input Voltage	120 VAC
OUTPUT	On Battery Frequency	60 Hz +/- 1%
	On Battery Voltage	120 VAC +/- 5%
	On Battery Waveform	Simulated Sine Wave
	UPS Topology	Line Interactive
	Overload Protection	Internal Circuitry Limiting, Circuit Breaker Protected
	Typical Transfer Time	4 ms
BATTERY	Battery Quantity	2, Hot-Swappable & User-Replaceable
	Battery Size	12V / 9Ah
	Battery Type	Sealed Lead-Acid
	Typical Recharge Time	8 hours

1500VA Battery Backup

Line-Interactive Mini-Tower UPS



ADDITIONAL SPECIFICATIONS (CONT.)

SURGE PROTECTION AND FILTERING	Coax Protection RG6	1-in / 1-out
	EMI / RFI Filtration	Yes
	Network Protection RJ45	1-in / 1-Out (10/100/1000)
	Surge Suppression	1500 J
MANAGEMENT AND COMMUNICATIONS	Audible Alarms	Battery Mode / Low Battery Overload / Fault
	HID Compliant USB Port	Yes
	LCD	Multifunction LCD
	LED Indicators	Power On / Wiring Fault
	Management Cable	USB Cable
	Software (Free Download)	PowerPanel® Personal
PHYSICAL SPECIFICATIONS	Form Factor	Mini-Tower
	Material of Construction	Plastic
WEIGHTS AND DIMENSIONS	Width/Height/Depth (in)	3.9 x 11 x 14 in.
	Width/Height/Depth (cm)	9.91 x 27.94 x 35.56cm
	Width/Height/Depth (mm)	99 x 279 x 356mm
	Weight (lb) Weight (kg)	25 lbs. 11.34kg
ENVIRONMENTAL	Operating Relative Humidity	0 - 90% (non-condensing)
	Operating Temperature	32-104°F (0-40°C)
	Storage Temperature	5-113°F (-15-45°C)
CERTIFICATIONS	Environmental	RoHS Compliant
	Safety	UL1778 cUL 107 5th FCC DOC Class B
WARRANTY	CEG Amount	\$500,000
	Product Warranty	24 months