

# 625VA Battery Backup

## Compact UPS

0E-625V8LCD2

**UltraTech**  
POWER PRODUCTS

### PRODUCT DESCRIPTION

A compact UPS with standby topology, the UltraTech 0E-625V8LCD2 provides battery backup and surge protection for desktop computers, workstations, network devices, and home entertainment systems.

### FEATURES

- 8 Grounded Outlets, 4 with Battery Backup
- 2 Transformer Sized Outlets, 1 with Battery Backup
- HID Compliant USB Connectivity Port
- EMI and RFI Filtration
- Simulated Sine Wave Output
- LCD Display
- PowerPanel® Personal Software for Remote Monitoring and Management



### SPECIFICATIONS

PART #	0E-625V8LCD2
UPC	840049300026
CAPACITY	650VA / 390W
OUTPUT	120 VAC +/- 5%
CORD LENGTH	5 ft. (1.5m)
OUTLET TYPES	8 x NEMA 5-15R
RUNTIME (HALF/FULL)	8.4 minutes / 2.8 minutes
DIMENSIONS	10.6 x 3.1 x 5.9 in. (269 x 79 x 150mm)
WEIGHT	6.4 lbs. (2.9kg)
WARRANTY	3-year
CONNECTED EQUIPMENT GUARANTEE	\$100,000

### TYPICAL APPLICATIONS


- Desktop Computers
- Workstations
- Home Theater Equipment
- Personal Electronics
- Home Networking
- Routers & Modems
- VoIP Phone Systems



# 625VA Battery Backup

Compact UPS

**UltraTech**  
POWER PRODUCTS

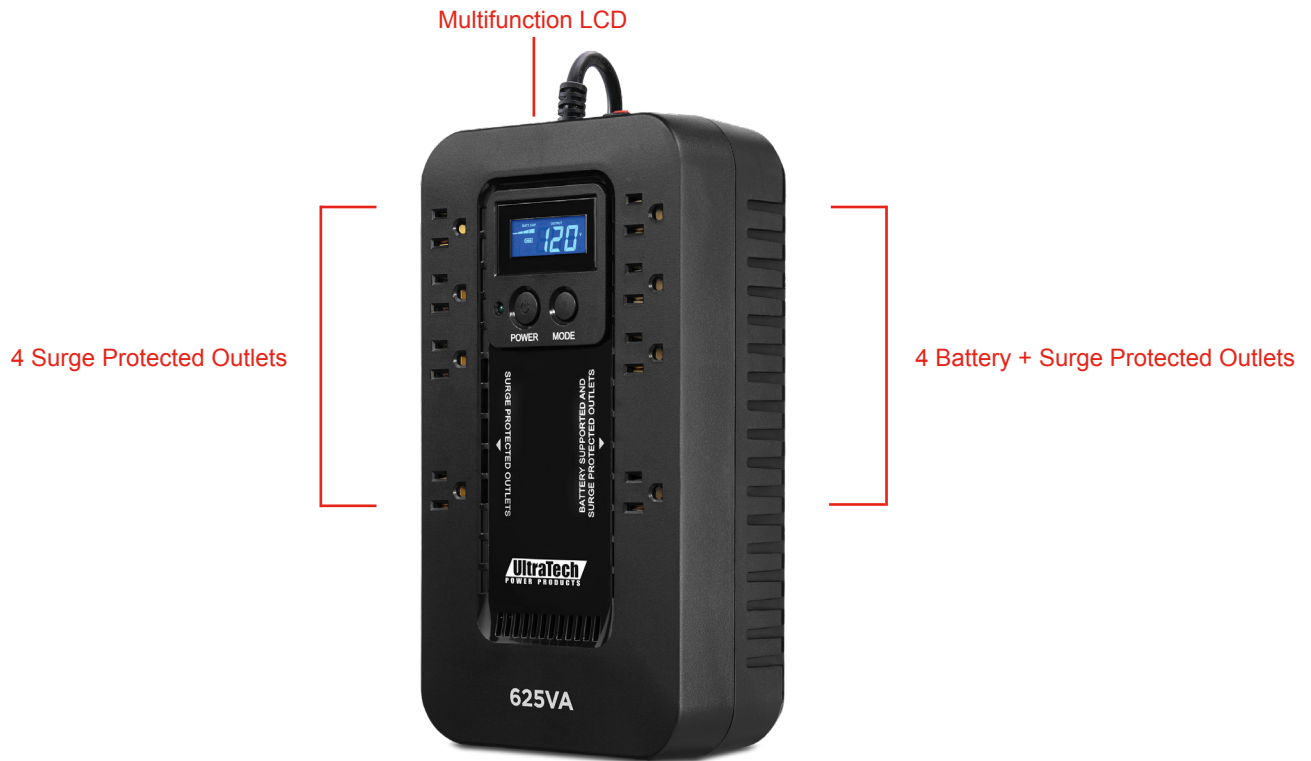

## ADDITIONAL SPECIFICATIONS

INPUT	Circuit Breaker	15A
	Cord Length	5 ft. (1.5m)
	Input Frequency Range	47 Hz-63 Hz
	Nominal Input Voltage	120 VAC
OUTPUT	On Battery Frequency	50/60 Hz +/- 1% (auto-sensing)
	On Battery Voltage	120 VAC +/- 5%
	On Battery Waveform	Simulated Sine Wave
	UPS Topology	Standby
	Overload Protection	Internal Circuitry Limiting, Circuit Breaker Protected
	Typical Transfer Time	4 ms
BATTERY	Battery Quantity	1, Replaceable by qualified technician
	Battery Size	12V
	Battery Type	Sealed Lead-Acid
	Typical Recharge Time	8 hours

# 625VA Battery Backup

## Compact UPS



### ADDITIONAL SPECIFICATIONS (CONT.)

<b>SURGE PROTECTION AND FILTERING</b>	EMI / RFI Filtration	Yes
	Surge Suppression	526 J
<b>MANAGEMENT AND COMMUNICATIONS</b>	Audible Alarms	Battery Mode / Low Battery / Overload
	HID Compliant USB Port	Yes
	LCD	Multifunction LCD
	LED Indicators	Power On
	Management Cable	USB Cable
	Software (Free Download)	PowerPanel® Personal
	<b>PHYSICAL SPECIFICATIONS</b>	Form Factor
Material of Construction		Plastic
Keyhole Mounting Slots		Yes
<b>WEIGHTS AND DIMENSIONS</b>	Width/Height/Depth (in) Width/Height/Depth (cm) Width/Height/Depth (mm)	10.6 x 3.1 x 5.9 in. 26.92 x 7.87 x 14.99cm 269 x 79 x 150mm
	Weight (lb) Weight (kg)	6.4 lbs. 2.9kg
<b>ENVIRONMENTAL</b>	Operating Relative Humidity	0 - 90% (non-condensing)
	Operating Temperature	32-104°F (0-40°C)
	Storage Temperature	5-113°F (-15-45°C)
<b>CERTIFICATIONS</b>	Environmental	RoHS Compliant
	Safety	UL1778 FCC Part 15 Class B CSA C22.2 NO. 107.3
<b>WARRANTY</b>	CEG Amount	\$100,000
	Product Warranty	3-Year Limited