




1602

POWERCOM AUDIO UNIT. SIMPLEBUS

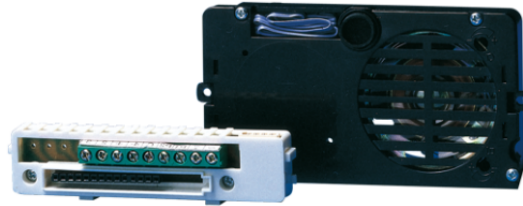

Audio speaker unit for Simplebus system with terminal board and double amplifier, watertight loudspeaker and electret microphone, Both, microphone and loudspeaker volumes, can be adjusted from the front. Complete with microprocessor and DIP SWITCH with 8 positions for programming the calls to the users. 12 V AC power supply (use Art. 1395/A). Electronic door-opening function on board (3A). To be inserted in modules Art. 3320/0, ù3320/1 and 3320/2. Dimensions: 102X55X35 mm. From the RI27 it is compatible with all Simplebus 2 functions and products. It allows call addressing for up to 120000 users.



1602

POWERCOM AUDIO UNIT. SIMPLEBUS

GENERAL DATA

Height (inch) (in)	2.17
--------------------	------

COMPATIBLE SYSTEMS

Comelbus system	Yes
-----------------	-----

ENVIRONMENTAL AND COMPLIANCE FEATURES

Operating temperature (°F)	-13 ÷ 131
----------------------------	-----------

GENERAL FEATURES

Maximum current absorption (mA)	200
---------------------------------	-----

Simplebus 2 audio system	Yes
--------------------------	-----

Simplebus 2 audio/video system	Yes
--------------------------------	-----